

未注公差/General tolerances(mm)




0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500		0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2°

A


B

C

D

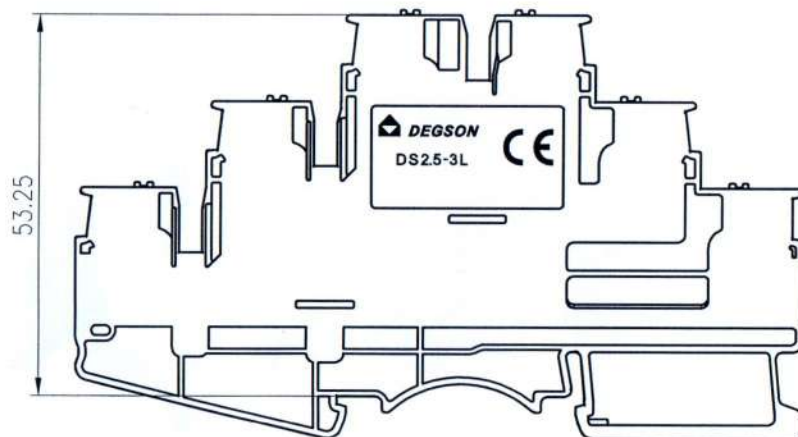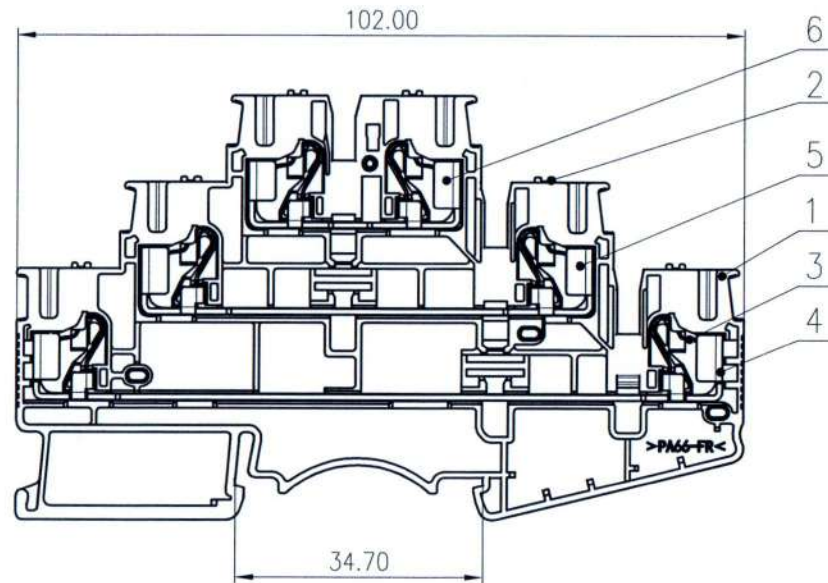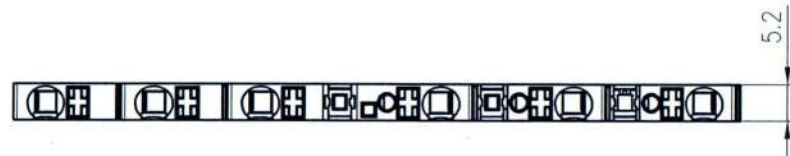

VIEW A

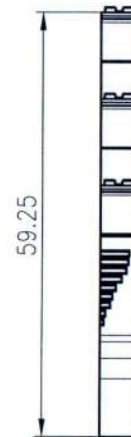

A

仅供参考图

签字: 李根带

日期: 2020.4.17

6	Current carrier 3	Copper	Sn Plated
5	Current carrier 2	Copper	Sn Plated
4	Current carrier 1	Copper	Sn Plated
3	Spring	Stainless steel	/
2	Button	PA66+GF%	UL94 V-0
1	Housing	PA66	UL94 V-0

ITEM	NAME OF PART	MATERIAL	NOTES	
UL 标准/UL Standard:		B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)		300/20	300/20	600/5
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		Ⅲ/3	Ⅲ/2	Ⅱ/2
额定电压/电压/Rated Voltage(V)/Current(A)		500/20	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		6	/	/
最大负载电流/Maximum load current		24A(具有4mm ² 导线横截面, 刚性 (with 4 mm ² conductor cross section, rigid))		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)		26~12/0.2~2.5&4(SOL)		
间距/Pitch(mm)/线数范围/Poles		5.2/N=01P		
剥线长度/Stripping length(mm)		10~12		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		
标准颜色编号/Standard color number:				
PANTONE / RAL		/		

MATERIAL: / /		SURFACE: /			
MAT NO.: / /		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
STATUS: /					
APPD:		NAME: DS2.5-3L-01P-1Y-00A(H)			
CHKD:					
DRFT: MoEK 2020.01.09		DRAWING NO.: 11000114		REV	DO-1
	SIZE: A4		TYPE: CUSTOMER DRAWING	SCALE: 1:1	SHEET 1/1