

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

1.Wire Range : 26~12AWG

IEC Standard

1.

Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(KV)	8.0KV
Rate Voltage(V)	/
Rate Current(A)	/

2.Wire Range : 0.2~2.5mm²;sol:4mm²

NOTES2:

1.Dimension shall be interpreted per ASME Y14.5-2009

2.Pitch : 5.2mm, Poles : N=01P

3.Stripping length : 10-12mm



4.Operating temperature: -40°C~+105°C


5.Undimensioned Tolerances:

Pitch Range In mm		Nominal Dimension Range In mm						
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2*

6.RoHS Compliance

DS2.5-PE - 01P - 1C - 00A (H)
(RoHS)
00A-(Standard)
(Series No.) (Poles) (Single Pitch) (Color): Yellow-Green

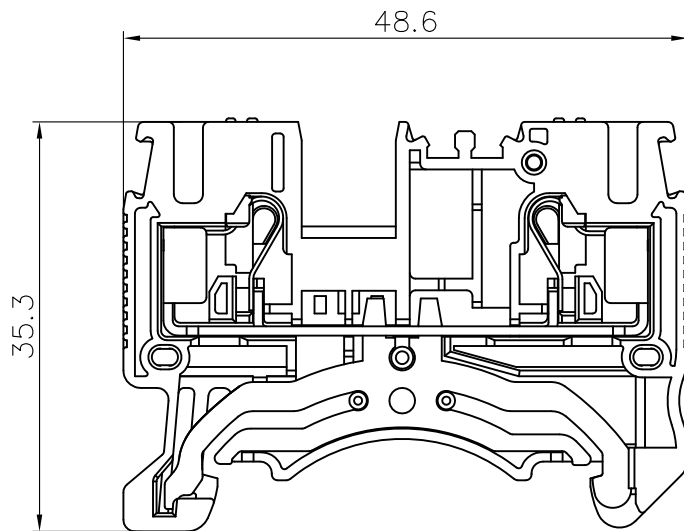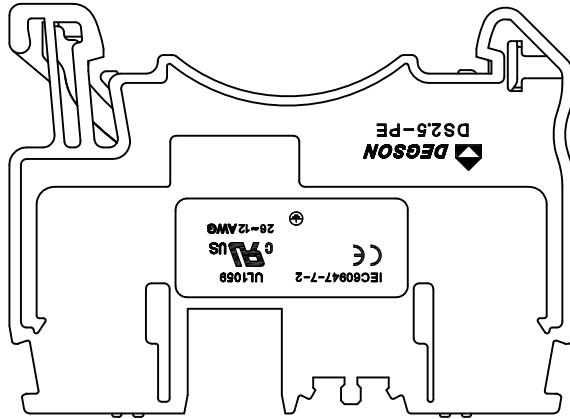

DETACHED LISTS	PART NO.: /	 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD: /	NAME:			
	CHKD: /	DS2.5-PE-01P-1C-00A(H)			
	DRFT: /	TITLE: CUSTOMER DRAWING		REV	DO
	 THIRD ANGLE PROJECTION		DRAWING NO.: /		SHEET 1/1
MM (INCH)			DO NOT SCALE DRAWING	SCALE 1:1	