

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorization is granted. Violations of ILL will result in legal action. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、商标、域名、企业名称、商号、其他知识产权等权利外，其他权利均归本公司所有。未经许可，不得复制或传播。 除专利、实用新型、外观设计、发明专利、软件著作权、商标、域名、企业名称、商号、其他知识产权等权利外，其他权利均归本公司所有。未经许可，不得复制或传播。

FOR-1755 Rev. 2.0

2

3

4

5

6

未注公差/General tolerances (mm)

0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	0.1/10 ±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

UL 标准/UL Standard:

额定电压/电压/Rated Voltage(V)/Current (A)

B

600V/20A

C

600V/20A

D

600V/5A

IEC 标准/IEC Standard:

过压类别/Overvoltage Category/污染等级/Pollution Degree

III/3

III/2

II/2

额定电压/电压/Rated Voltage(V)/Current (A)

800/24

/

/

额定脉冲电压(KV)/Rate Impulse Voltage(KV)

8

/

/

线径范围(硬线和软线)/Wire Range(rigid and flexible) (AWG/mm²)

26~12 / 0.2~2.5.4(Sol)

间距/Pitch(mm)/线数范围/Poles

5.20/01P

剥线长度/Stripping length(mm)


10~12

使用温度范围/Operating temperature(°C)


-40~+105

符合 RoHS 环保要求/Conform to RoHS


Yes



4

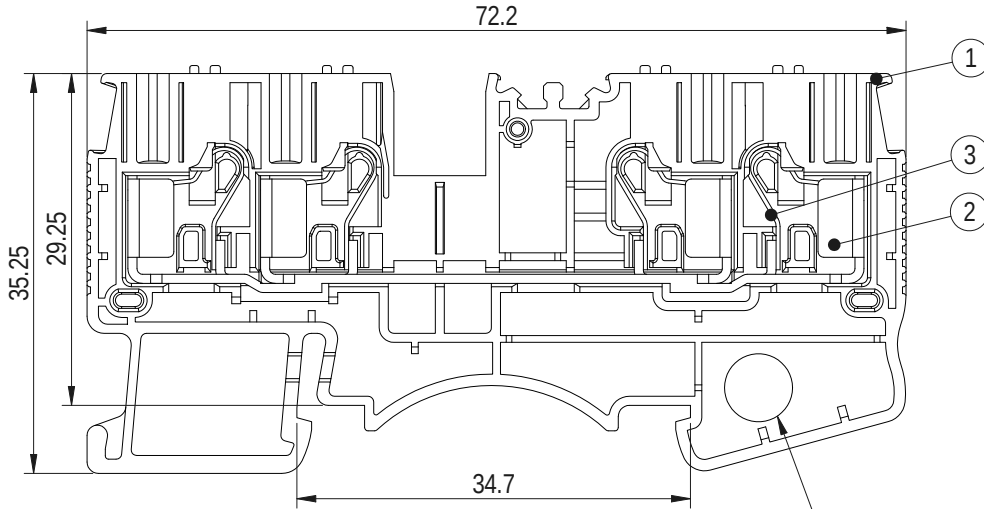

The cold runner mold of the circular convex hull does not have this structure

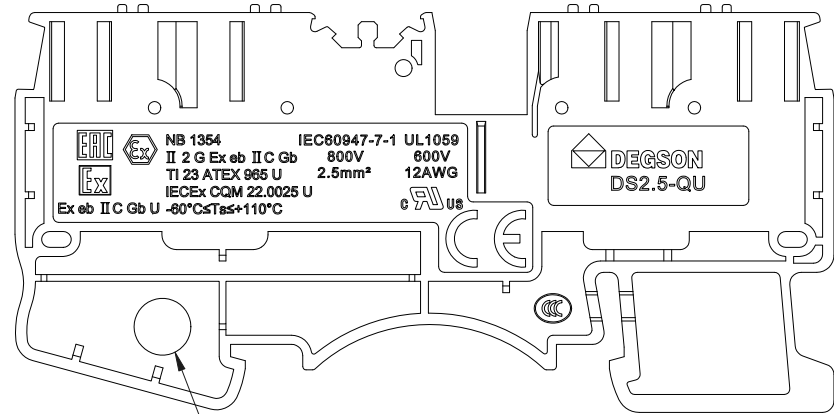

The cold runner mold of the circular convex hull does not have this structure

4	Button	PA66+GF%	UL94V-0
3	Spring	Stainless steel	/
2	Current carrier	Copper	Sn plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

			MATERIAL:		SURFACE/COLOR:		
			MAT NO./REV:		MAT STATUS: 批量		
APPD:	李根芳	2024.03.19	NAME				
CHKD:	马恩升	2024.03.19	DS2.5-QU-01P-1Y-00Z(H)				
DRFT:	姜海文	2024.03.13					
		A4					
			DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
			200270582	CUSTOMER DRAWING	已发布	1.5:1	1/1

1

2

3

4

5

6