

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

1.Wire Range : 20~8AWG

IEC Standard

1.

Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(KV)	8.0KV
Rate Voltage(V)	/
Rate Current(A)	/

2.Wire Range : 0.5~6mm²; sol: 10mm²

NOTES2:

1.Dimension shall be interpreted per ASME Y14.5-2009

2.Pitch : 8.2mm

3.Stripping length : 10-12mm




4.Operating temperature: -40°C~+105°C

5.Undimensioned Tolerances:

Pitch Range In mm			Nominal Dimension Range In mm						
TO	Over	Over	TO	Over	Over	Over	Over	Over	
6	6	10	30	30	60	100	150	150	0.1/10
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'	<

6.RoHS Compliance

DS6-PE - 01P - 1C - 00A (H)
(RoHS)
00A-(Standard)
(Series No.) (Poles) (Single Pitch) (Color): Yellow-Green

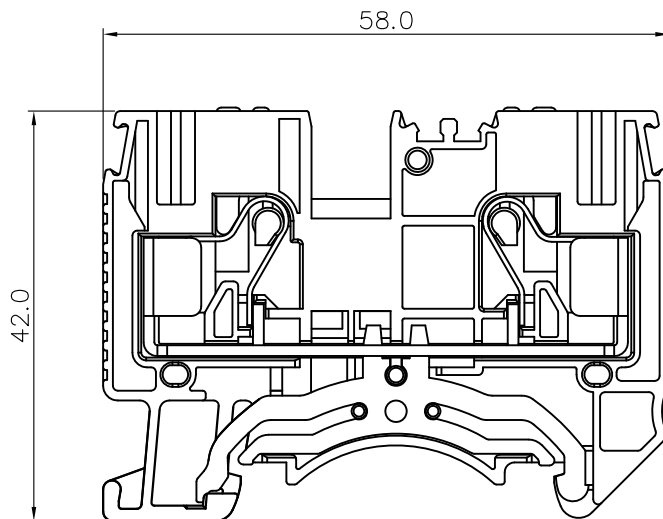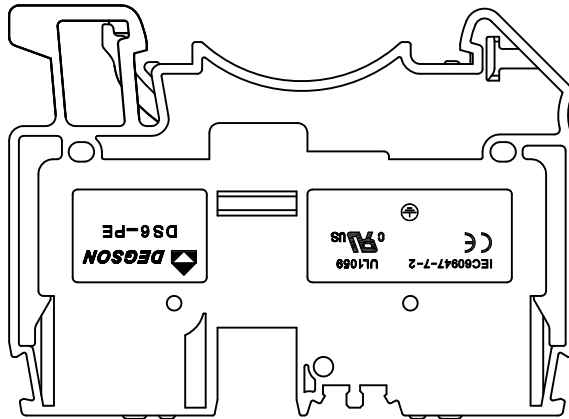

DETACHED LISTS	PART NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	/	NAME:			
	CHKD:	/	DS6-PE-01P-1C-00A(H)			
	DRFT:	/	TITLE: CUSTOMER DRAWING		REV	DO
	 THIRD ANGLE PROJECTION		DRAWING NO.:		/	SHEET
			DO NOT SCALE DRAWING	SCALE	1: 1	