



DSRC05A-F3



DSRC08A-F3

特点

- 隔离式插座、05A:10A, 08A:7A。
- 环保产品 RoHS REACH。

Features

- Separable socket, 05A:10A, 08A:7A.
- Green product RoHS REACH.

DSRC 08A-F 3-XXA (H)

产品大类:DSRC

Product Category:DSRC

脚位数量:05A,08A

Pin Number:05A,08A

保护方式:F:隔离式

Protect way:F:Separable structure

颜色:3:黑色

Colour:3:Black

环保:H

RoHS:H

性能参数 Performance Parameters

技术参数 Technical parameters


产品型号 Product type	DSRC05A-F3	DSRC08A-F3
额定电流 Rated current	12A	10A
额定电压 Rated voltage	300V	
线圈/触点介质耐压 Coil/Contact dielectric voltage	2500V/S	
触点间介质耐压 Dielectric voltage between contact	2500V/S	
螺钉扭矩 Screw torque	1.0Nm	
外连接导线 External connection wire	20-14/0.5-2.5AWG/mm ²	
环境温度 Ambient temperature	-40~+65℃	
重量 Weight	22g	27g

配套继电器及配件 Supporting relays and accessories

产品型号 Product type	继电器 Relay	模块 Module	塑料扳扣 Plastic pull clasp	金属卡簧 Metal clamp spring
DSRC05A-F3	DRPB-1C	DMD	B-20B	—
DSRC08A-F3	DRPB-2C	DMD	B-20B	—

外形尺寸图、接线图 Overall Dimensions, Wiring Diagrams

DSRC05A-F3

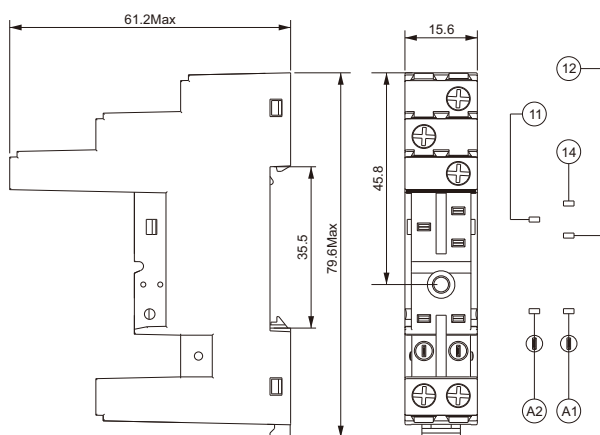

DSRC08A-F3

