

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利、实用新型或外观设计注册外，其他任何侵权行为均须承担赔偿责任。本公司保留所有权利。未经授权，不得复制或传播本文件内容。违反者将承担法律责任。所有权利保留。

FOR-1755 Rev.2.0



2

3

4


5

6

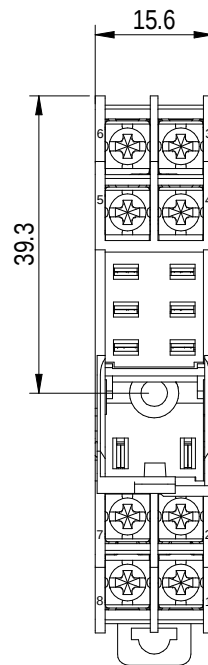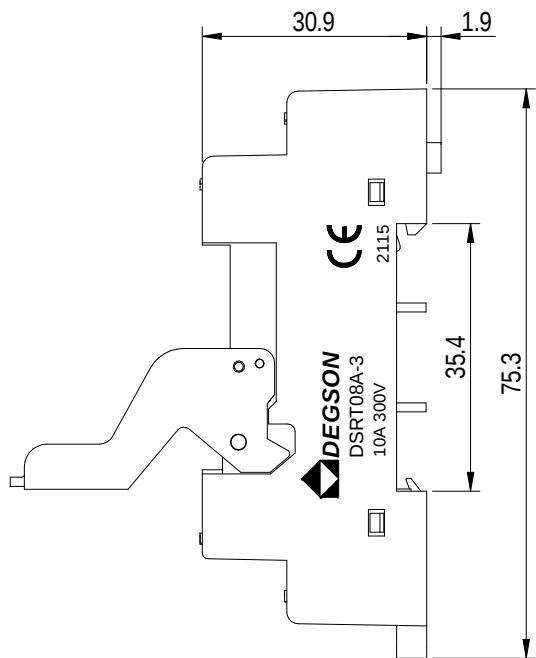

公差/General tolerances (mm)														表面粗糙度/Surface roughness (Ra)
0~3	>3~6	>6~10	>10~18	>18~30	>30~50	>50~80	>80~120	>120~180	>180~250	>250~315	>315~400	>400~500	>500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2°

额定电流/Rated current	10A
额定电压/Rated voltage	300V
线圈/触点介电耐压/Coil/Contact dielectric voltage	3000V/S
触点间介电耐压/Dielectric voltage between contact	2500V/S
螺钉扭矩/Screw torque	1.0Nm
外接导线/External connection wire	20-14/0.5-2.5WC/mm²
环境温度/Ambient temperature	-45~+85°C
重点管控符号/Key controlled symbol	*
符合RoHS环保要求/Conform to RoHS	
印字为激光打标，印字内容清晰、无断线等/Printing for laser marking, printing content is clear, no broken line, etc.	
印字面按图中脚位参考/Seal literal reference according to the foot position in the drawing	

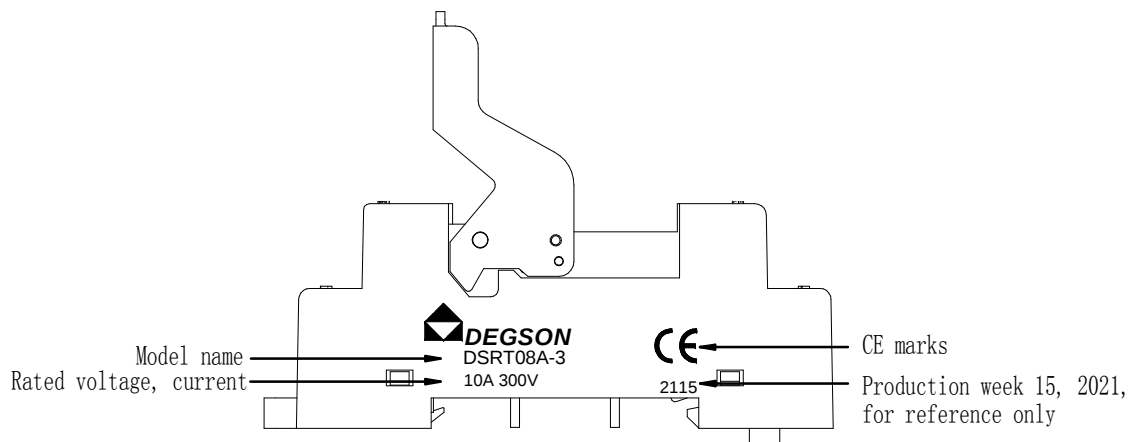

 DEGSON			MATERIAL:		SURFACE/COLOR:								
			MAT NO./REV: 30020000058-1 / 00		MAT STATUS: 批量								
APPD: LGL		2024.04.07		NAME DSRT08A-3-00Z (H)									
CHKD: MEK		2024.04.07											
DRFT: GXJ		2024.04.07		DRAWING NO. 200275512		TYPE CUSTOMER DRAWING		DRAWING STATUS		SCALE 2:1		SHEET 1/1	
 A4													

00	/	新图纸下发	GXJ	2024.04.07
REV	ECN	DESCRIPTION	DRFT	DATE