


## Common mode suppression chokes



- Current rating up to 5A
- Broadband attenuation characteristics
- Low magnetic leakage flux
- UL rated materials
- RoHS compliant



By March 2005


### Environmental ratings

Maximum continuous operating voltage:	250V @ 50°C
Power operating frequency:	dc to 400Hz @ 50°C
Overcurrent:	1.5x I <sub>nominal</sub> for 1 minute, once per hour
High potential test voltage winding-to-winding @ 25°C:	3000VAC, 60sec, guaranteed
	2000V, 50Hz, 2sec, factory test
Temperature range (operation and storage):	-25°C to +100°C
Climatic class per IEC68:	25/100/21
Flammability corresponding to:	UL94-V0

### Test conditions

Measuring frequency:	10kHz; 5mA < 16μH; 500μA > 16μH < 160μH; 50μA > 160μH < 16mH; 50mV > 16mH < 160mH; inductance tolerance ±30%
Resistance:	Tolerance max. ±15% @ 25°C; ≤20mΩ, 1A; > 20mΩ ≤ 200mΩ 100mA; > 200mΩ ≤ 2V 10mA
Electrical characteristics:	@ 25°C ±2°C

### Typical electrical schematic

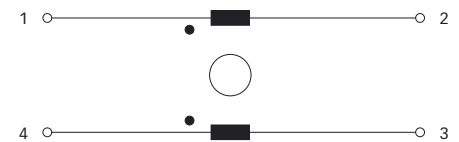

Common mode suppression chokes are mainly used to filter noise on AC power lines. Noise on commercial power lines could enter the equipment and disturb the proper function. Noise generated by the equipment for example from switch mode power supplies need to be filtered and the spread of such generated noise need to be suppressed. Common mode suppression chokes together with line bypass capacitors building an AC EMI suppression filter device.

### Features and benefits

- Current rating up to 5A
- Compact and light weight
- Low magnetic leakage flux
- Sectional winding
- Standard foot print
- Broad range of available inductances and current ratings
- Custom specific versions
- Schaffner offers you also EMI measurement service to verify that your design will pass the required safety standards.

### Typical applications

- Input filters for switch mode power supplies
- Filters to reduce leaking noise
- TV's, VCR's, multimedia and audio equipment
- Office automation, communications and other electronic devices
- Electric ballast
- AC/AC converters

Choke selection table


EV Choke	EH Choke	$L_{\text{nominal}}$ (±30%)	DC resistance R	Rated current I (50°C)	Weight [g]
		[mH]	[mΩ]	[A]	
EV 20-0.3-02-33M	EH 20-0.3-02-33M	33	1780	0.3	10
EV 20-0.5-02-18M	EH 20-0.5-02-18M	18	725	0.5	10
EV 20-0.8-02-5M6	EH 20-0.8-02-5M6	5.6	245	0.8	10
EV 20-1.0-02-3M9	EH 20-1.0-02-3M9	3.9	168	1.0	10
EV 20-1.2-02-3M3	EH 20-1.2-02-3M3	3.3	127	1.2	10
EV 20-1.5-02-1M8	EH 20-1.5-02-1M8	1.8	72	1.5	10
EV 20-2.0-02-0M8	EH 20-2.0-02-0M8	0.82	38	2.0	10
EV 24-0.5-02-44M	EH 24-0.5-02-44M	44	1250	0.5	18
EV 24-0.8-02-18M	EH 24-0.8-02-18M	18	438	0.8	18
EV 24-1.0-02-10M	EH 24-1.0-02-10M	10	244	1.0	18
EV 24-1.5-02-4M5	EH 24-1.5-02-4M5	4.5	116	1.5	18
EV 24-2.0-02-2M5	EH 24-2.0-02-2M5	2.5	62	2.0	18
EV 24-3.0-02-1M2	EH 24-3.0-02-1M2	1.2	29	3.0	18
EV 24-4.0-02-0M5	EH 24-4.0-02-0M5	0.5	16	4.0	18
EV 28-1.0-02-36M	EH 28-1.0-02-36M	36	591	1.0	31
EV 28-1.5-02-20M	EH 28-1.5-02-20M	20	282	1.5	31
EV 28-2.0-02-11M	EH 28-2.0-02-11M	11	162	2.0	31
EV 28-3.0-02-5M0	EH 28-3.0-02-5M0	5	79	3.0	31
EV 28-4.0-02-2M3	EH 28-4.0-02-2M3	2.3	40	4.0	31
EV 28-5.0-02-1M1	EH 28-5.0-02-1M1	1.1	27	5.0	31
EV 35-1.0-02-90M	EH 35-1.0-02-90M	90	628	1.0	70
EV 35-2.0-02-20M	EH 35-2.0-02-20M	20	150	2.0	70
EV 35-3.0-02-10M	EH 35-3.0-02-10M	10	72	3.0	70
EV 35-4.0-02-5M0	EH 35-4.0-02-5M0	5	53	4.0	70
EV 35-5.0-02-3M6	EH 35-5.0-02-3M6	3.6	33	5.0	70

All wires rated 130°C or higher

Typical choke attenuation


Per CISPR 17; 50Ω/50Ω asym

EV/EH 20 types




- A = 33mH
- B = 18mH
- C = 5.6mH
- D = 3.9mH
- E = 3.3mH
- F = 1.8mH
- G = 0.8mH

EV/EH 24 types




- A = 44mH
- B = 18mH
- C = 10mH
- D = 4.5mH
- E = 2.5mH
- F = 1.2mH
- G = 0.5mH

EV/EH 28 types



- A = 36mH
- B = 20mH
- C = 11mH
- D = 5mH
- E = 2.3mH
- F = 1.1mH


EV/EH 35 types




- A = 90mH
- B = 20mH
- C = 10mH
- D = 5mH
- E = 3.6mH

**Mechanical Data**


EV 20

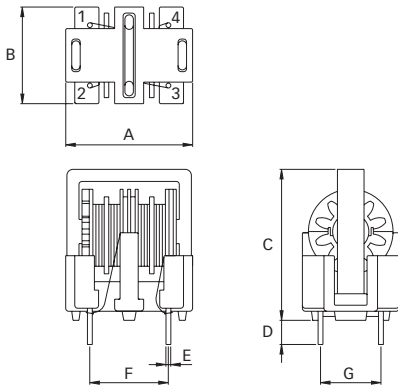


EV 24, EV 28

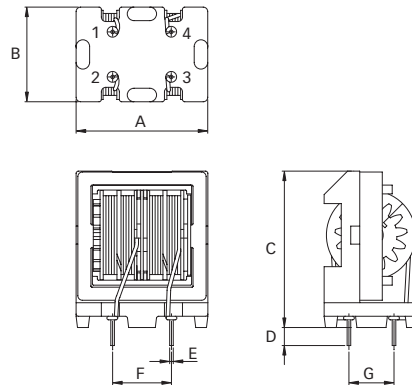

EV 35

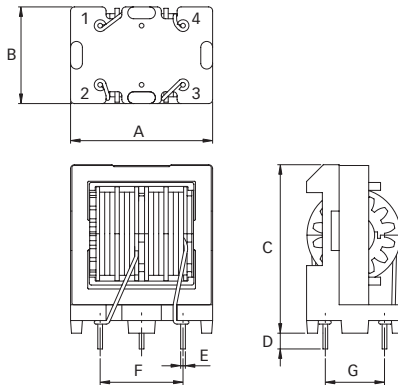

EH 20 to EH 35

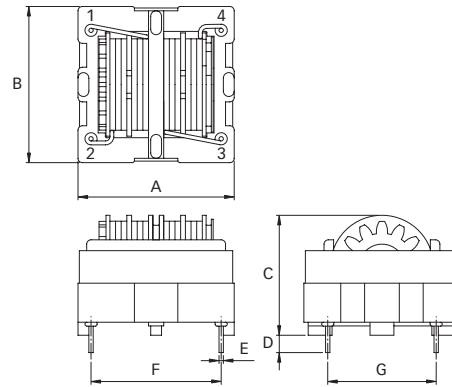

**Dimensions**

	EV 20	EV 24	EV 28	EV 35	EH 20	EH 24	EH 28	EH 35
<b>A</b>	21.0	24.6	29.2	36.0	21.0	24.0	28.0	36.0
<b>B</b>	16.0	17.4	21.0	24.5	21.0	24.0	28.0	36.0
<b>C</b>	25.0	29.1	34.7	42.7	17.8	20.0	22.9	27.7
<b>D</b>	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
<b>E</b>	∅ 0.8	∅ 0.8	∅ 0.8	∅ 1.2	∅ 0.8	∅ 0.8	∅ 0.8	∅ 1.0
<b>F</b>	13.0	13.0	13.0	21.0	13.0	21.0	24.0	30.0
<b>G</b>	10.0	10.0	10.0	15.0	10.0	15.0	20.0	25.0

All dimensions in mm; 1 inch = 25.4mm  
Tolerances according: ISO2768 / EN22768