

RoHS Compliant

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	24.02.22	NEW DRAWING	


UL&CSA GRADE:
UL Style.....2651
Rate Temperature.....-20°C to 105°C
Rate Voltage.....Max 300V
Flame Test.....VW-1

CSA Standard.....C22.2 NO.210.2
Rate Temperature.....-20°C to 105°C
Rate Voltage.....Max 300V
Flame Test.....FT1.FT2

Physical Property:
Stranded Conductor
AWG Size.....28AWG
Material of Insulation.....Polyvinyl Chloride(PVC)
Insulation thickness average.....9 mil

Pin No.	Color
1	Brown
2	Red
3	Orange
4	Yellow
5	Green
6	Blue
7	Purple
8	Grey
9	White
10	Black
11	Brown
12	Red

Brown line

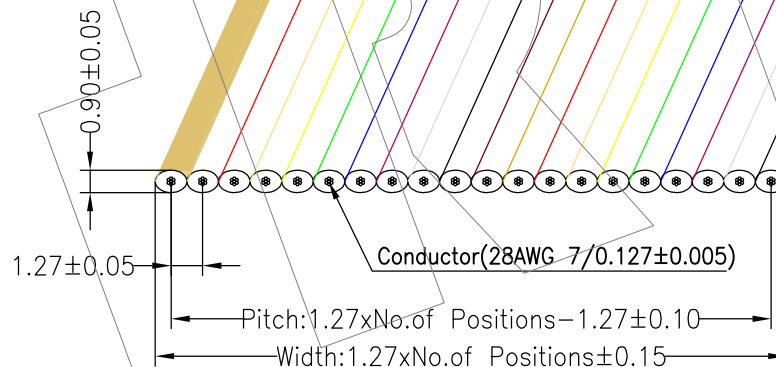

Ordering Information

FC 1 2651 - 28 XX 0305 - 01R

Pitch
1=1.27

No.of Pins
4P~64P

Length
0305=30.5m/Reel

TsingRe
www.tsingre.com

SHENZHEN TSINGRE TECHNOLOGY CO.,LTD

DRAW	Amy	OPERATION		SCALE	NTS	TITLE: 1.27mm Flat Cable UL2651 28AWG Rain bow Cable				
		X.X	±0.30	UNIT	mm	PRODUCT CUSTOMER DRAWING				
CHECK	Jose	X.XX	±0.20	SIZE	A4	PART NO.		DOC PART	REVISION	
		X.XXX	±0.10			FC12651-28XX0305-01R		001	A0	
APPROVE	David	Angle	±3°	THIRD ANGLE PROJECTION 		CUSTOMER PART NO.		CUSTOMER	SHEET NUMBER	
		DIM	TOL						1 OF 1	