

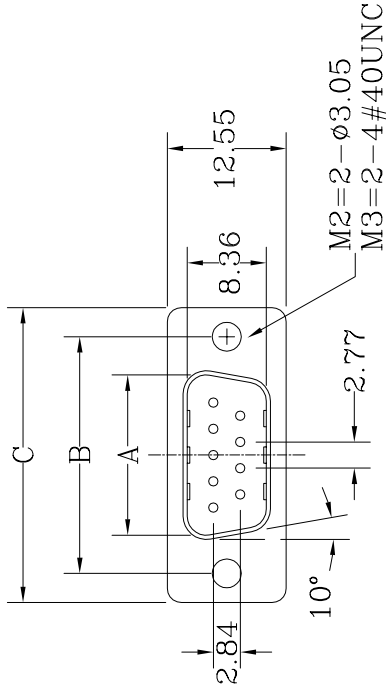

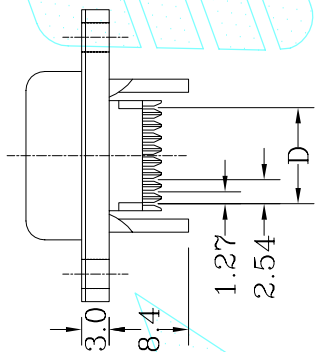



REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	JUL.26.02

MALE



FEMALE

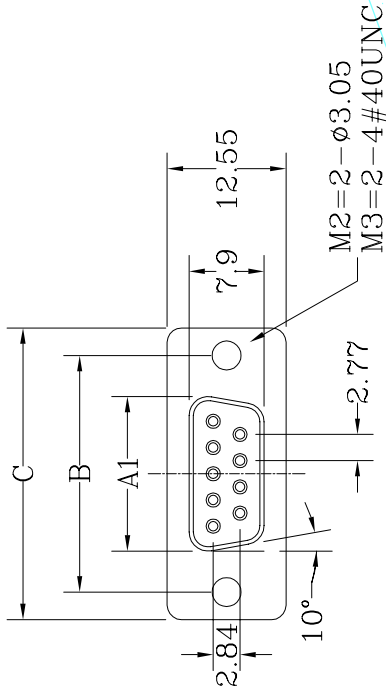

SPECIFICATIONS

- *Contact Resistance : 30mΩ max. at DC 100mA
- *Insulator Resistance : 1000MΩ min. at DC 500V
- *Current Rating: 1 AMP

DIELECTRIC WITHSTANDING :

- *Voltage : AC 500V For 1 minute
- *Operating Temperature : -55°~+105°c
- *Contact : MALE - Brass
- *Contact : FEMALE - Phosphor Bronze
- *Housing : PBT & 30% Glass Fiber (UL 94V-O)
- *Single Contact Insertion Force : 500g max
- *Single Contact Withdrawal Force : 30g min

Dimension

Positon	A	B	C	D	E	A1
*9	16.92	24.99	31.16	10.16	16.40	16.33
15	25.50	33.32	39.42	17.78	24.40	24.66
25	38.96	47.04	53.34	30.48	38.80	38.38
37	55.45	63.50	69.68	45.72	55.00	54.84

TOLERANCE UNLESS OTHERWISE SPECIFIED	PROJECTION
LINEAR	ANGLE
X. ± 0.3	X° ±
X. ± 0.1	X° ±
XX ± 0.05	XX° ±
.XXX±	.XXX°±
APPD	
CHKD	
DRAW Tao.Tao.	JUL.26.2002



GOLD-TEK ELECTRIC CO., LTD.

TITLE	UNITS	CPART NO
D-SUB IDC WITH MATEL SHELL THICK FLANGE	MM	
SCALE		
SIZE	A4	

PART NO.	FD***M2* (FD***M3*)
CAD NO.	I268
F:\Drw\DSUB\DSUB0053	1 OF 1

圖面編號:GTKSD0994-A(1)