




REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	17.05.08	NEW DRAWING	

Symbol	Item	Specification
N	No.of Conductor(导体数)	4P~80P
L	Total Length(总长度)	L±5
A	Insulation Length(绝缘长度)	(L-16)±5
TP	Total Pitch(总间距)	0.5x(N-1)Pin±0.08
W	Width(总宽度)	0.5xNpin+0.5±0.08
P	Pitch(间距)	0.50±0.03
M	Margin(边缘宽度)	0.50±0.08
T	Cable thickness(线材厚度)	0.121±0.05
T1	Insert thickness(插入厚度)	0.303±0.05
C1/C2	Conductor Strip Length(导体长度)	4.0±1.0
S1/S2	Supporting Tape Length(补强板长度)	8.0±2.0
T2	Conductor thickness(导体厚度)	0.035±0.005
B	Conductor Width(导体宽度)	0.30±0.03
E	Slanting(线口倾斜度)	<0.5
--	Conductor Material	Tinned Copper
--	Insulation Material(绝缘材料)	Flame retardand polyester(阻燃)
--	Supporting Tape Material(补强板材料)	PET
--	Supporting Tape Color(补强板颜色)	蓝色 BLUE
--	Supporting Tape Spec(补强板规格)	0.225mm

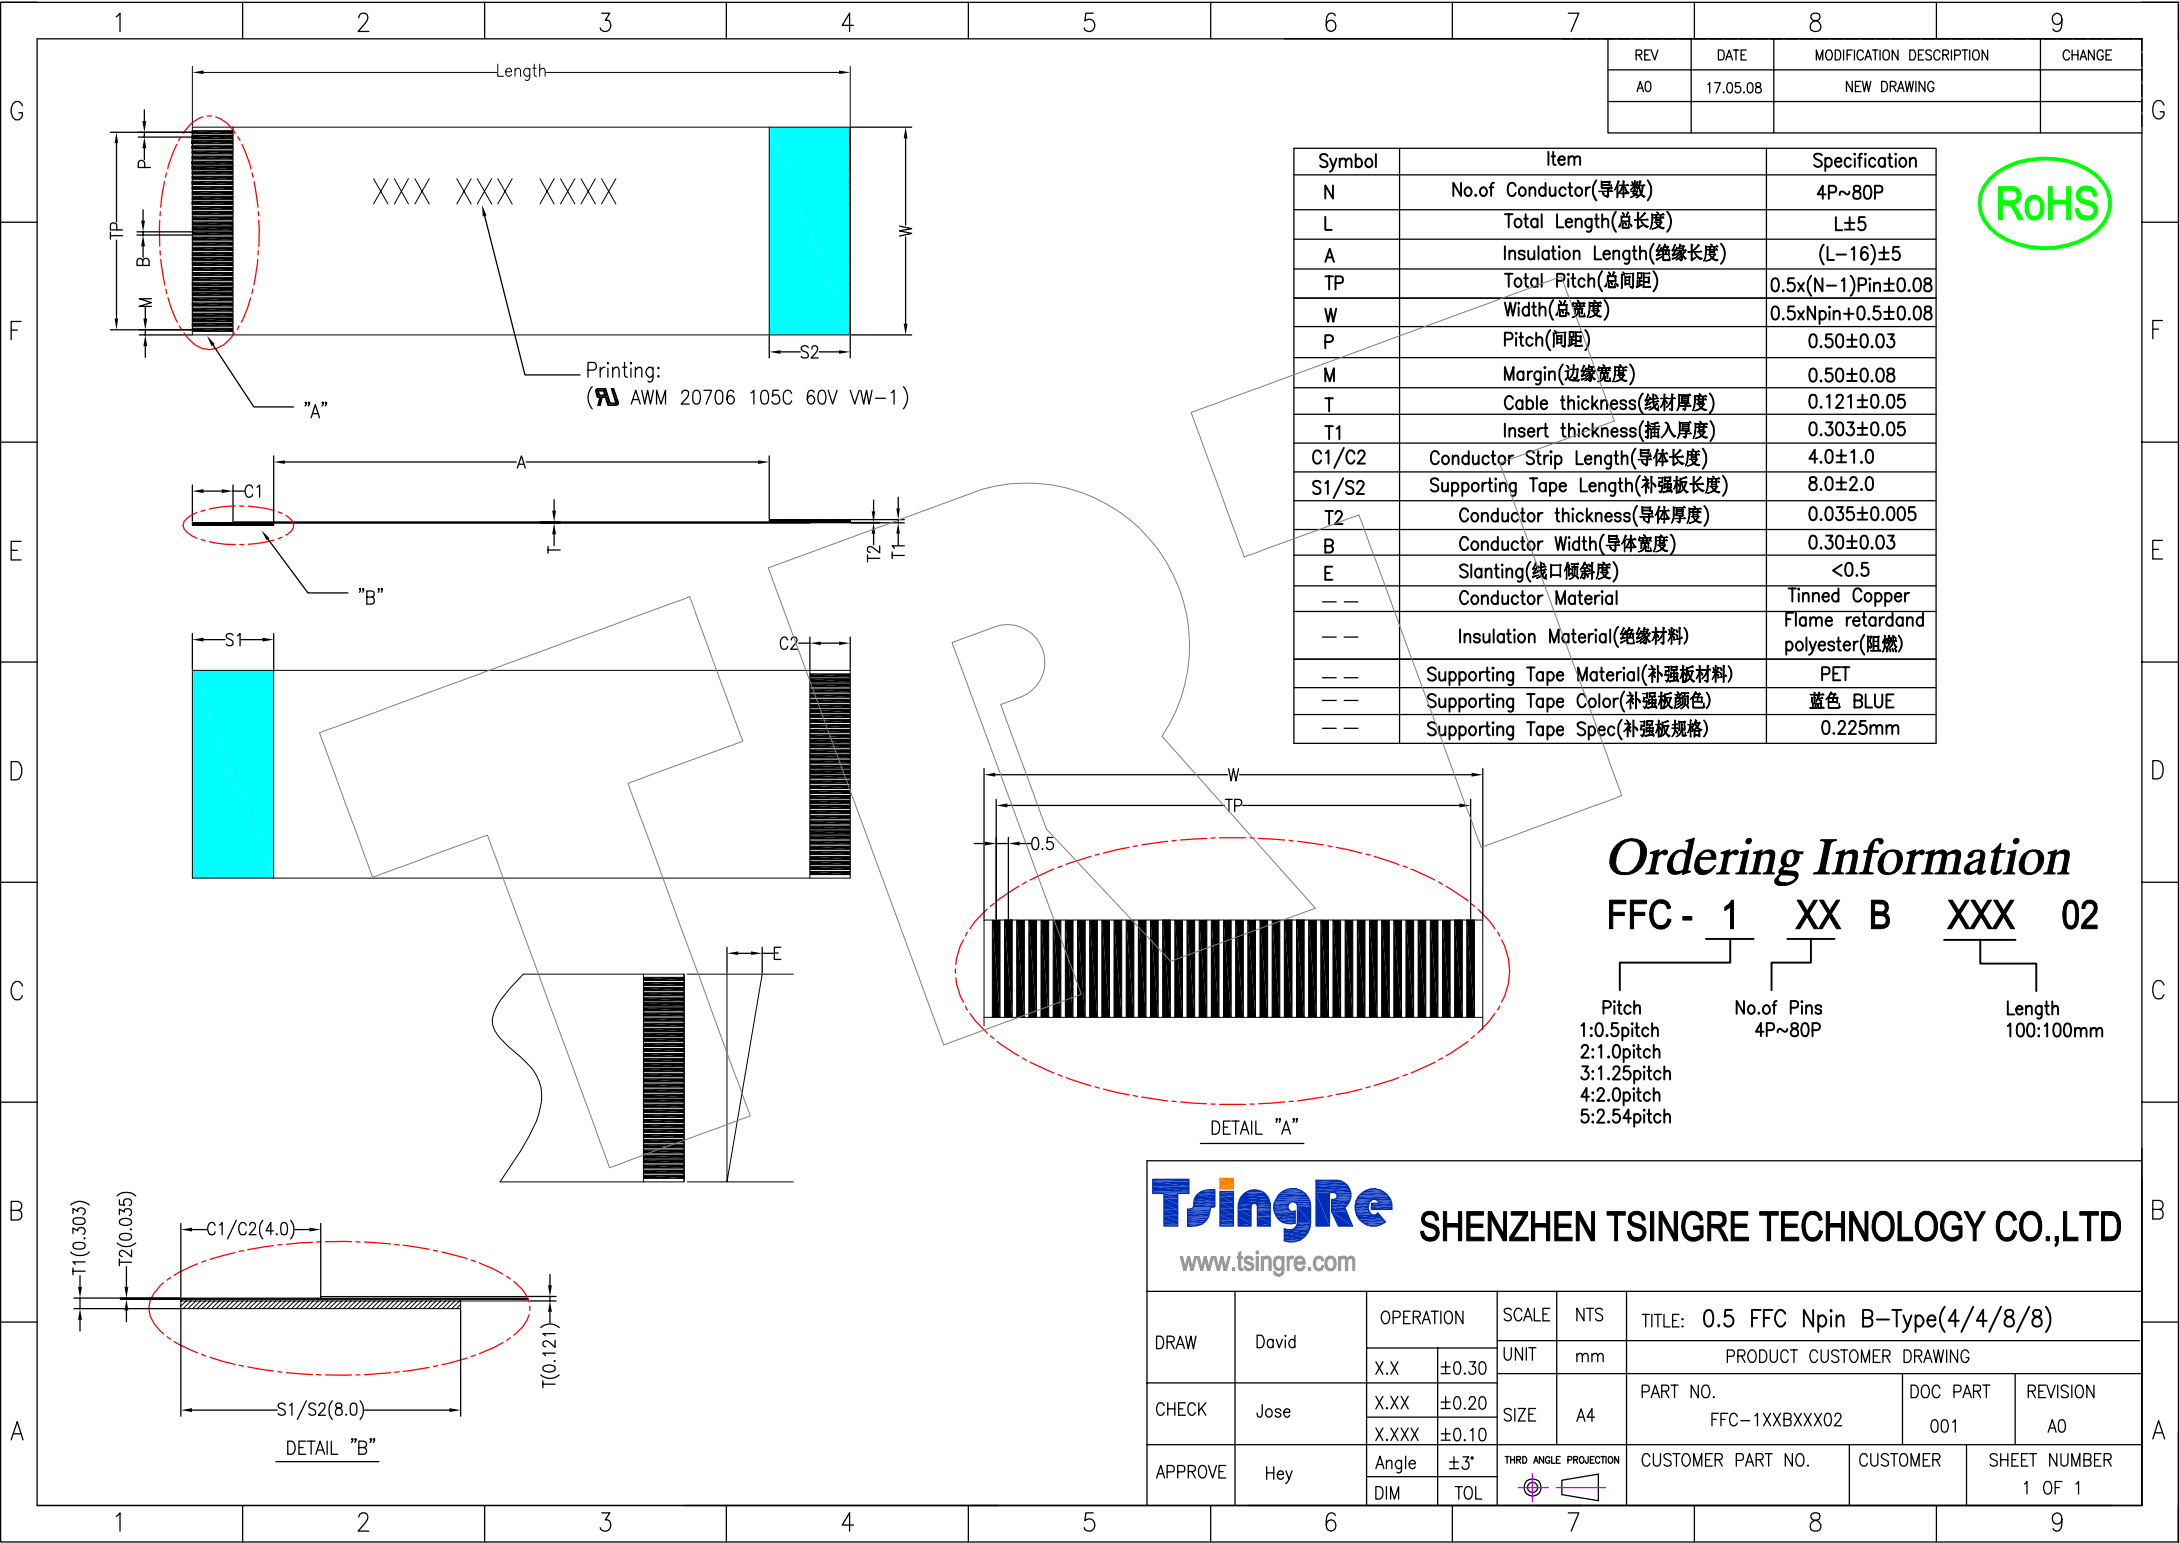

Ordering Information

FFC - 1 XX B XXX 02

Pitch
1:0.5pitch
2:1.0pitch
3:1.25pitch
4:2.0pitch
5:2.54pitch

No.of Pins
4P~80P

Length
100:100mm



SHENZHEN TSINGRE TECHNOLOGY CO.,LTD

DRAW	David	OPERATION		SCALE	NTS	TITLE: 0.5 FFC Npin B-Type(4/4/8/8)		
		X.X	±0.30	UNIT	mm	PRODUCT CUSTOMER DRAWING		
CHECK	Jose	X.XX	±0.20	SIZE	A4	PART NO.	DOC PART	REVISION
		X.XXX	±0.10			FFC-1XXBXXX02	001	A0
APPROVE	Hey	Angle	±3°	THRD ANGLE PROJECTION		CUSTOMER PART NO.	CUSTOMER	SHEET NUMBER
		DIM	TOL					