

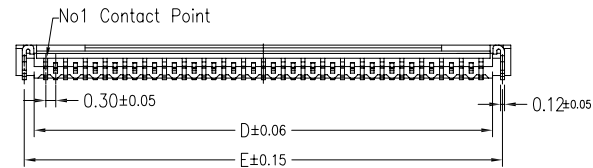
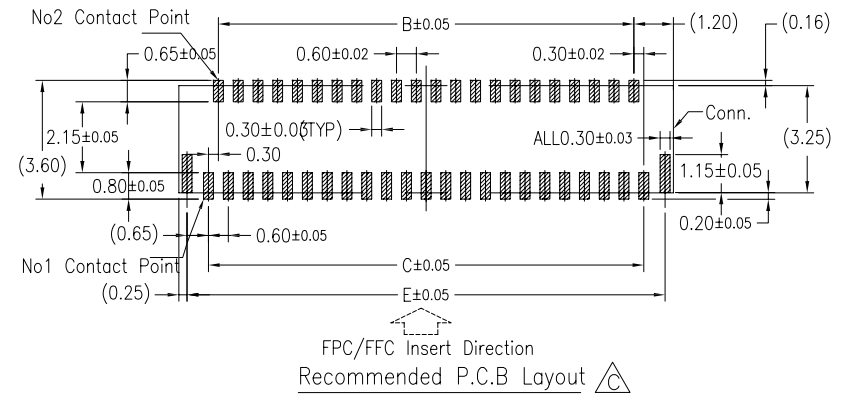




5		6		7		8	
REV.	DATE	ECN NO.	MODIFICATION			APPROVER	
A	2014/03/11	/	NEW			Vicky	
B	2015/11/27	RD00315112701	结构优化			Vicky	

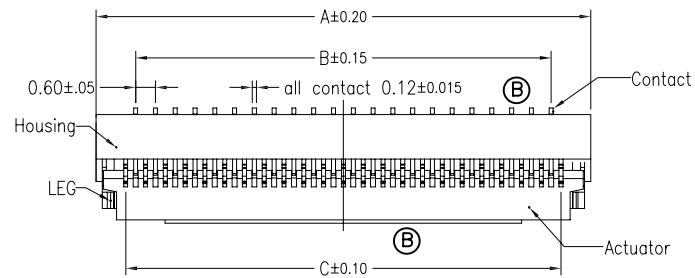


PIN NO.	A	B	C	D	E
13	5.40	3.00	3.60	4.25	4.90
15	6.00	3.60	4.20	4.85	5.50
17	6.60	4.20	4.80	5.45	6.10
19	7.20	4.80	5.40	6.05	6.70
21	7.80	5.40	6.00	6.65	7.30
23	8.40	6.00	6.60	7.25	7.90
25	9.00	6.60	7.20	7.85	8.50
27	9.60	7.20	7.80	8.45	9.10
29	10.20	7.80	8.40	9.05	9.70
31	10.80	8.40	9.00	9.65	10.30
33	11.40	9.00	9.60	10.25	10.90
35	12.00	9.60	10.20	10.85	11.50
37	12.60	10.20	10.80	11.45	12.10
39	13.20	10.80	11.40	12.05	12.70
41	13.80	11.40	12.00	12.65	13.30
45	15.00	12.60	13.20	13.85	14.50
49	16.20	13.80	14.40	15.05	15.70
51	16.80	14.40	15.00	15.65	16.30
57	18.60	16.20	16.80	17.45	18.10
61	19.80	17.40	18.00	18.65	19.30
67	21.60	19.20	19.80	20.45	21.10
71	22.80	20.40	21.00	21.65	22.30
73	23.40	21.00	21.60	22.25	22.90

Note:

- 1.Material
 - 1.1: Housing: LCP UL94-V0 Color:Natural.Or Black
 - 1.2: Actuator: LCP UL94-V0 Color:Black Or Natural
 - 1.3: Contact: Phosphor Bronze.
 - 1.4: LEG: Phosphor Bronze.
- 2.Plating
 - 2.1: Contact: **Gold Plating**
 - 2.2: LEG: Matte Tin Plating Over Nickel.
- 3.Rating:
 - 3.1: Operating Voltage: 30V AC/DC.
 - 3.2: Current Rating: 0.2A AC/DC.
 - 3.3: Operating Temperature: -55°C~+85°C.

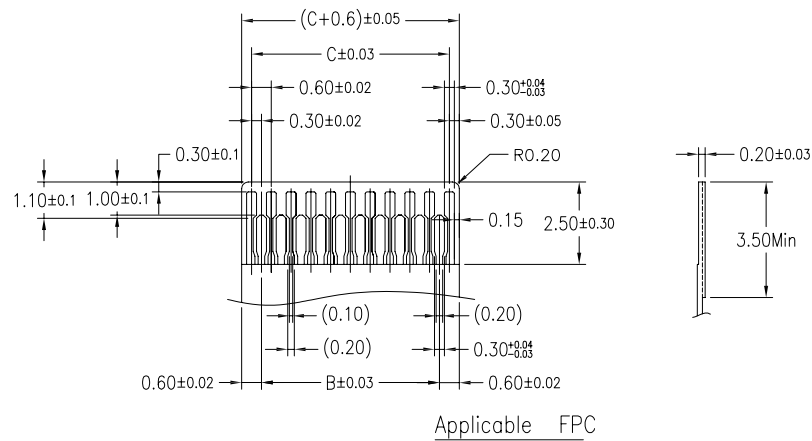

GENERAL TOLERANCE				UNITS mm		NAME: FPC		ATOM® 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO.,LTD.			
SELECT	✓			MAT'L		PART NO: FPC030**-14***		TITLE: FPC0.3mm XP SMT H=1.0mm 掀盖式 黑胶			
TOL. ON:	1	2	3								
X.XXX	±0.10	±0.05	±0.15	FINISH		APPD: Vicky		DWG NO. ATOM-A02220			
X.XX	±0.20	±0.13	±0.25			CHKD: Doris					
X.X	±0.30	±0.25	±0.50			Q'TY					
X.		±0.38	±1.00	DR: Cmy						SCALE	SHEET
ANGLE	±5°					1:1	1/1			B	