


RoHS COMPLIANT

REV.	ECN NO.	DESCRIPTION	DATE
A		RELEASE	JAN. 05. 06
B		MODIFY P/N	MAR. 22' 07
C		MODIFY PIN LENGTH	JUL. 07' 09
D		MODIFY P/N	DEC. 28' 10






With Latch x 2 pcs

Electrical Characteristics

- *Current Rating:
5 AMP
- *Dielectric Voltage:
1000V At 1 Minute
- *Insulator Resistance:
1000MΩ Min. At 500V DC
- *Operating Temperature:
-55°C ~ +105°C

Material & Finish

- *Shell:
Steel, Nickel Plated.
- *Contact:
Copper Alloy, Selective Gold Over Nickel On Contact Area, Tin/Lead Over Nickel Plated On Tail Area.
- *Insulator:
PBT & Glass Fiber Reinforced UL94V-0

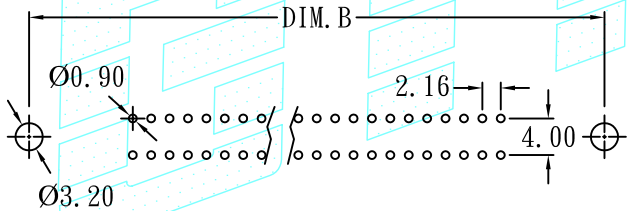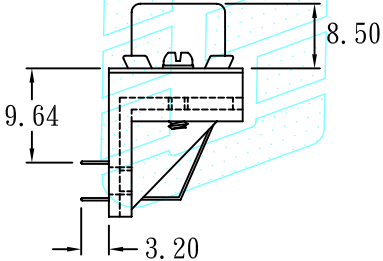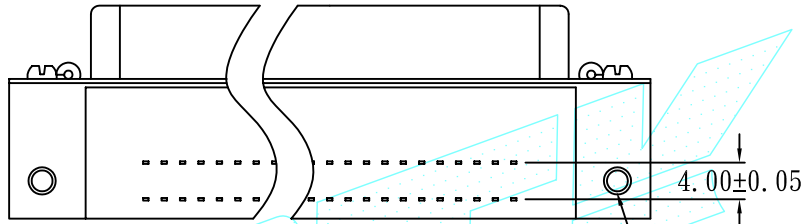

Recommended P. C. B. Layout(Top View)
Tolerances:±0.10mm

Part No.	Pos.	DIM. A	DIM. B	DIM. C	DIM. D
G57LE14FL-32-440	14	43.90	36.00	25.20	6
G57LE24FL-32-440	24	54.70	46.80	36.00	11
G57LE36FL-32-440	36	67.70	59.70	48.90	17
G57LE50FL-32-440	50	82.80	74.90	64.10	24

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION
LINEAR	ANGLE	UNITS
X. ± 0.50	X° ±	MM
.X ± 0.30	.X° ±	
.XX ± 0.20	.XX° ±	SCALE
.XXX±	.XXX° ±	SIZE
APPD		A4
CHKD		
DRAW	Z.	DEC. 28' 2010

GOLD-TEK ELECTRIC CO., LTD.

TITLE: CENTRONIC CONNECTOR FEMALE DIP 90° TYPE WITH LATCH (簡易鎖雙牙L片)

PART NO. G57LE**FL-32-440

CAD NO. I556

F:\Drw\CEN\CEN-0059

SHEET 1 OF 1

圖面編號:GTKSD1728-D(1)