


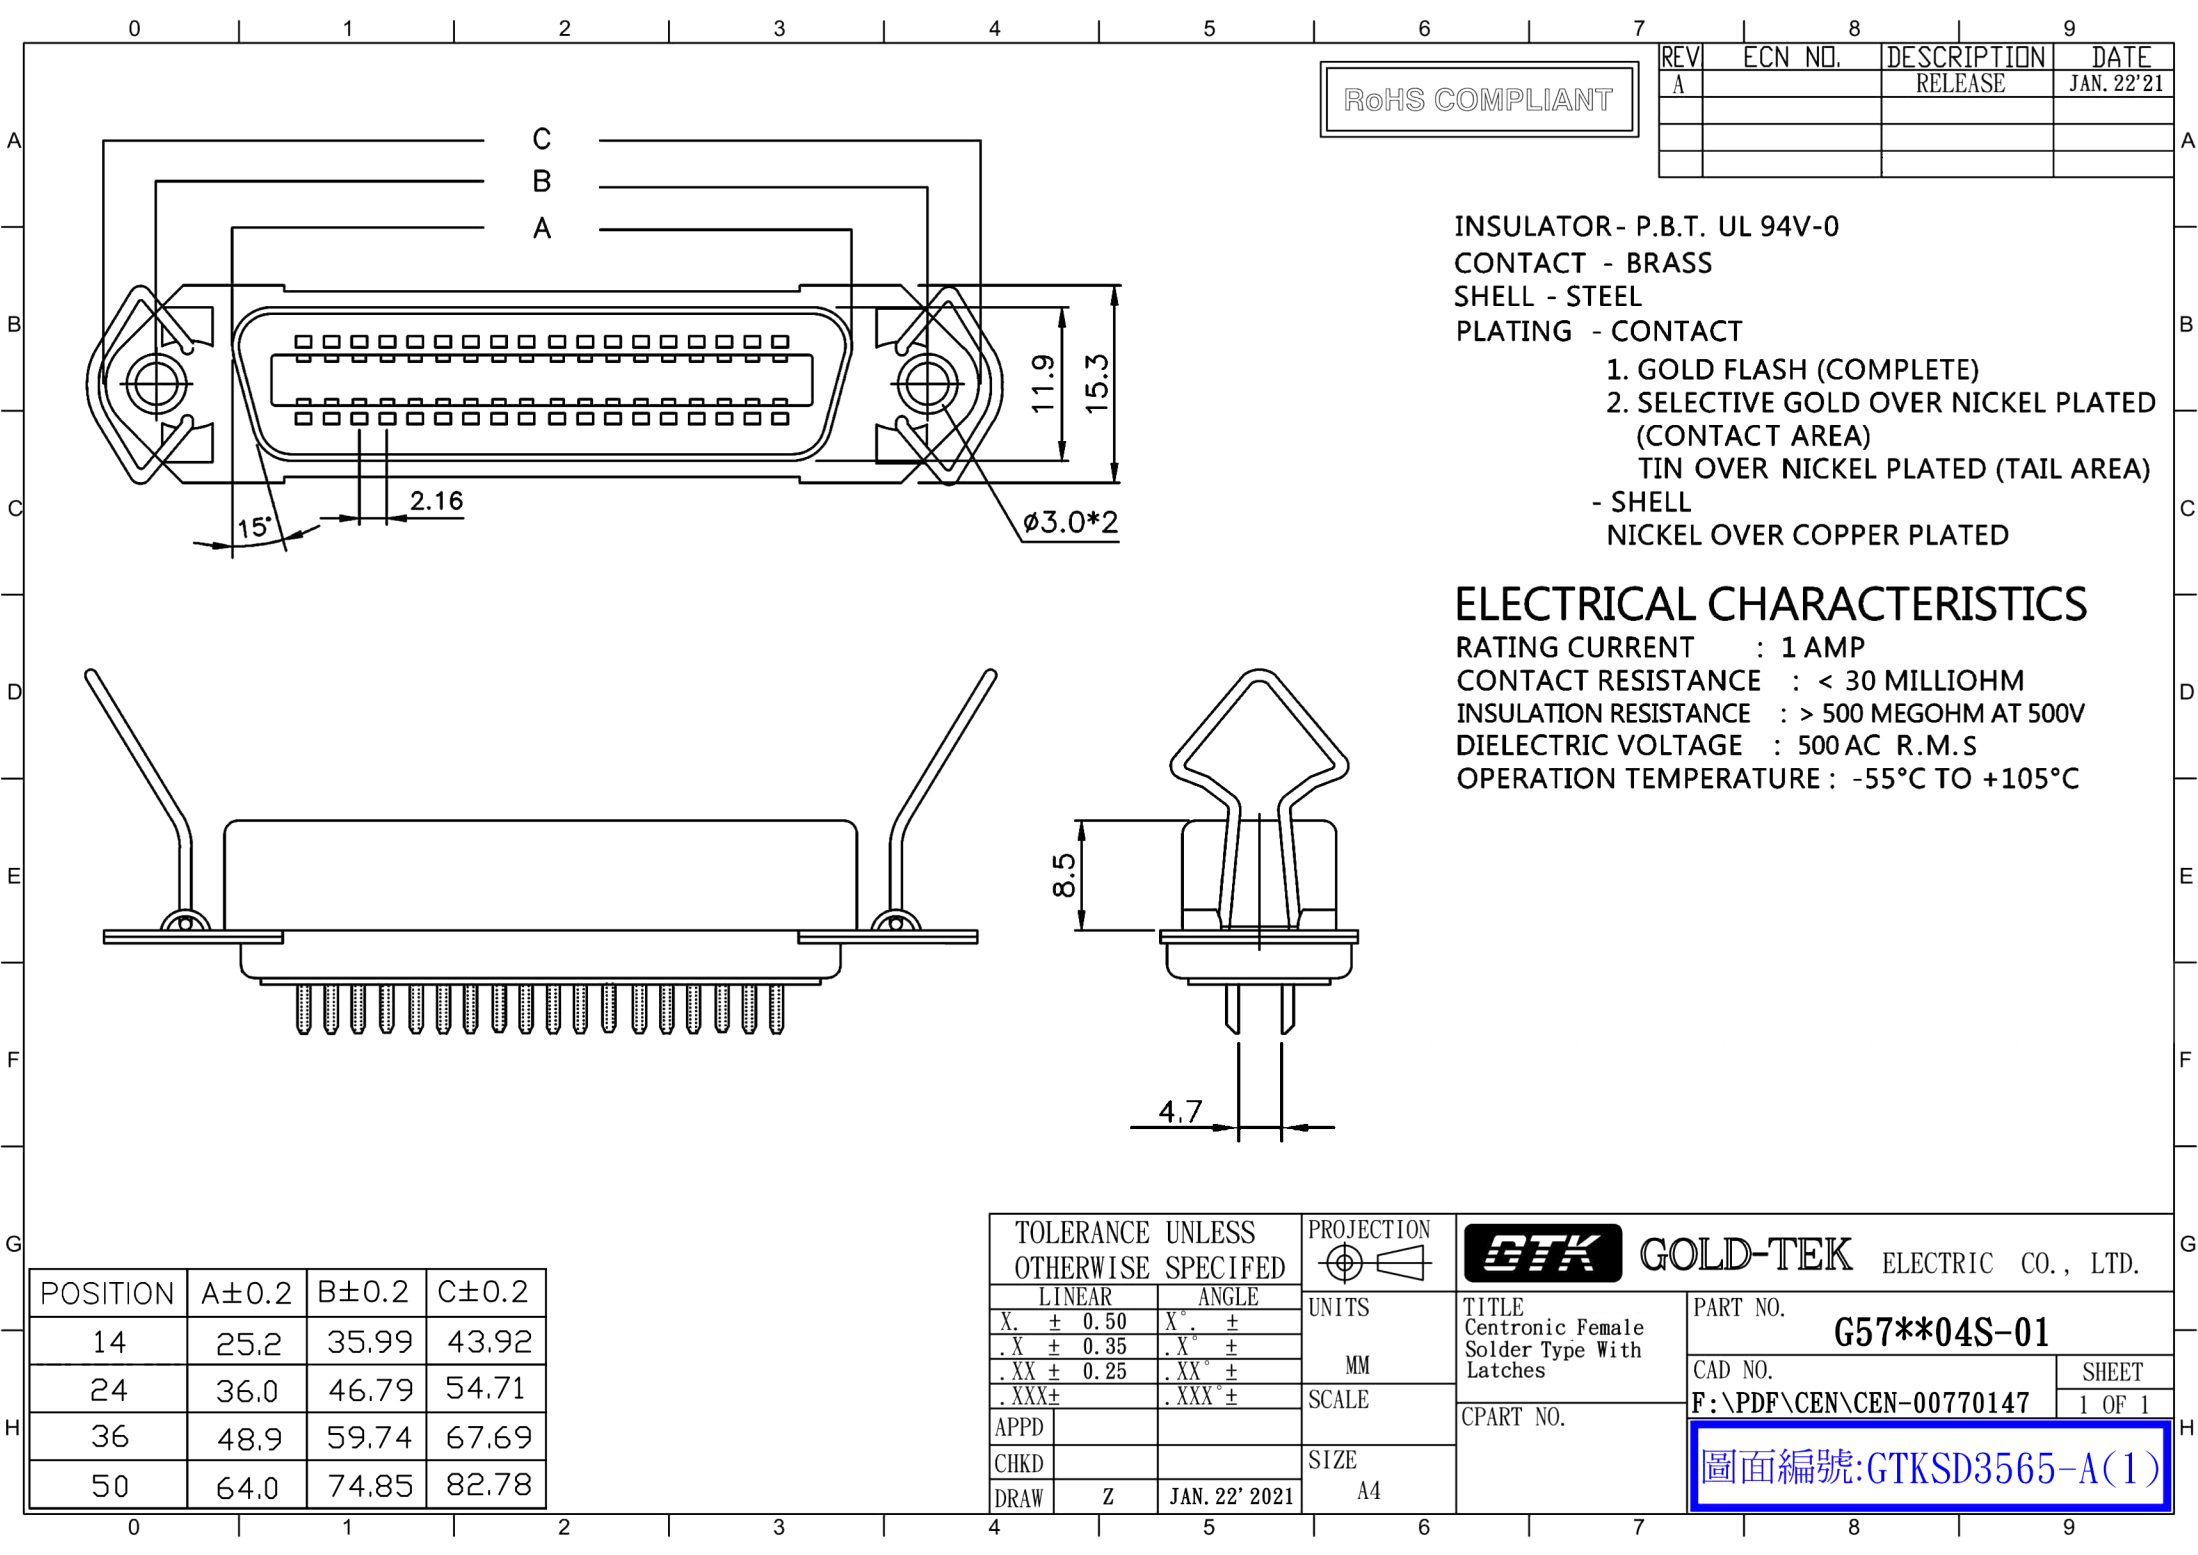

RoHS COMPLIANT


REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	JAN. 22'21

INSULATOR - P.B.T. UL 94V-0
CONTACT - BRASS
SHELL - STEEL
PLATING - CONTACT
1. GOLD FLASH (COMPLETE)
2. SELECTIVE GOLD OVER NICKEL PLATED (CONTACT AREA)
TIN OVER NICKEL PLATED (TAIL AREA)
- SHELL
NICKEL OVER COPPER PLATED

ELECTRICAL CHARACTERISTICS

RATING CURRENT : 1 AMP
CONTACT RESISTANCE : < 30 MILLIOHM
INSULATION RESISTANCE : > 500 MEGOHM AT 500V
DIELECTRIC VOLTAGE : 500 AC R.M.S
OPERATION TEMPERATURE : -55°C TO +105°C

POSITION	A±0.2	B±0.2	C±0.2
14	25.2	35.99	43.92
24	36.0	46.79	54.71
36	48.9	59.74	67.69
50	64.0	74.85	82.78

TOLERANCE UNLESS OTHERWISE SPECIFIED			PROJECTION 	 GOLD-TEK ELECTRIC CO., LTD.		
LINEAR		ANGLE	UNITS MM	TITLE Centronic Female Solder Type With Latches	PART NO. G57**04S-01	
X. ± 0.50	X°. ±					
.X ± 0.35	.X°. ±					
.XX ± 0.25	.XX°. ±					
.XXX±	.XXX°. ±	SCALE	CPART NO.	CAD NO.	SHEET	
APPD				F:\PDF\CEN\CEN-00770147	1 OF 1	
CHKD				圖面編號:GTKSD3565-A(1)		
DRAW	Z	JAN. 22' 2021	A4			