
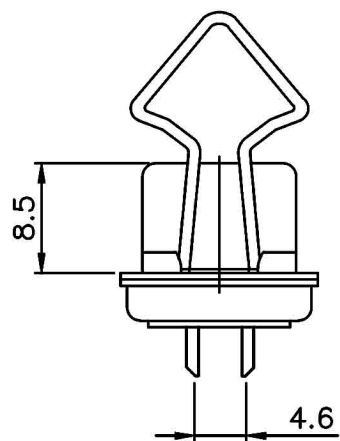


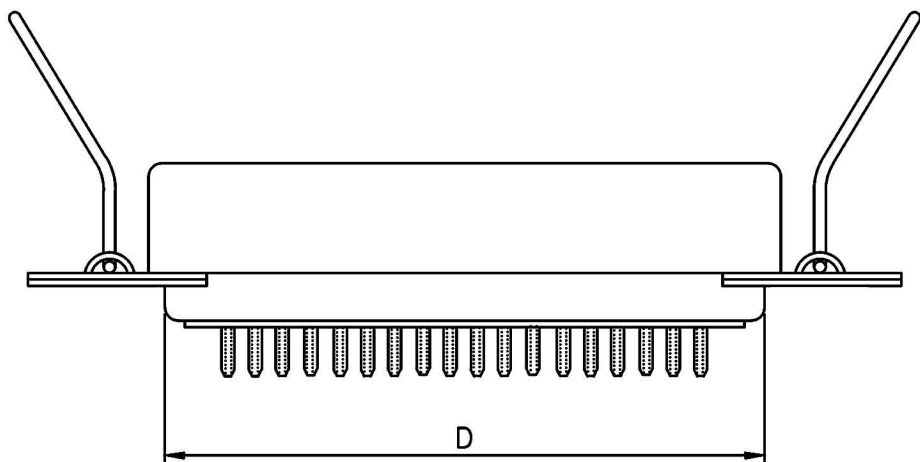

INSULATOR- P.B.T. +30%GLASS FIBER
UL 94V-0
CONTACT - PHOSPHOR BRONZE
SHELL FINISH - STEEL NICKEL PLATED
HOOD - STEEL
PLATING - CONTACT
1. GOLD FLASH (COMPLETE)
2. SELECTIVE GOLD OVER NICKEL PLATED
(CONTACT AREA) TIN OVER
NICKEL PLATED (TAIL AREA)
- SHELL
NICKEL OVER COPPER PLATED
- HOOD
NICKEL OVER COPPER PLATED

ELECTRICAL CHARACTERISTICS

RATING CURRENT : 5 AMP
CONTACT RESISTANCE : < 25 MILLIOHM
INSULATION RESISTANCE : > 1000 MEGOHM AT 500V
DIELECTRIC VOLTAGE : 1000V AT 1 MINUTE
OPERATION TEMPERATURE: -55°C TO +105°C

APPLIED TO WAVE SOLDER CAPABLE TO 240°

Position	A	B	C	D
14F	25.20	36.00	43.90	22.70
24F	36.00	46.80	54.70	33.50
36F	48.90	59.70	67.70	46.60
50F	64.10	74.90	82.80	61.70

TOLERANCE UNLESS OTHERWISE SPECIFIED		
LINEAR	ANGLE	
X. $\pm$ 0.50	X° $\pm$	
. X $\pm$ 0.35	. X° $\pm$	
. XX $\pm$ 0.25	. XX° $\pm$	
. XXX $\pm$	. XXX° $\pm$	
APPD		
CHKD		
DRAW	Z	OCT. 27'2016



UNITS

MM

SCALE

SIZE

A4



GTK GOLD-TEK ELECTRIC CO., LTD.

TITLE	Centronic 14、24、 36、50 Pos. Female Solder Type With Latches
CPART NO.	

PART NO.

G57**04S

CAD NO.

CAD NO.
F:\PDF\CEN\CEN-0012

SHEET

1 OF 1

圖面編號:GTKSD0931-C(1)