
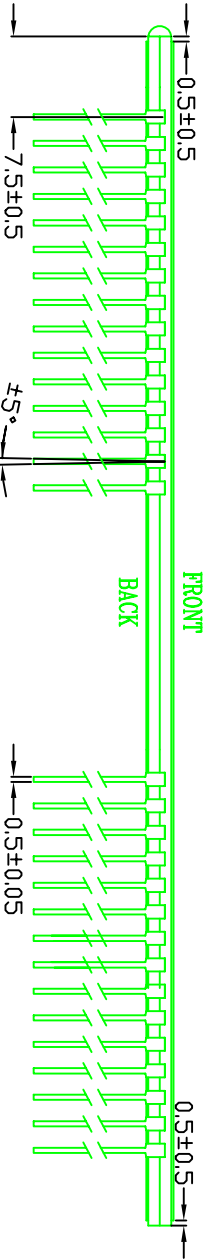


SCALE 1:1

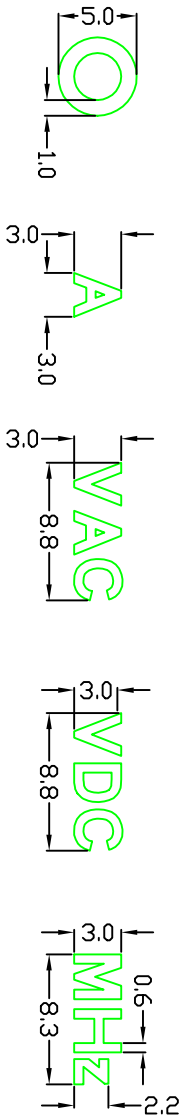


NOTE:

- 1 DISPLAY TYPE : TN
- 2 VIEWING DIRECTION : 6 O'CLOCK
- 3 POLARIZER MODE : TRANSPARENT/POSITIVE
- 4 DRIVE METHOD : 1/3 DUTY 1/2 BIAS
- 5 OPERATING VOLTAGE : 5.0V(FOR REFERENCE VOLTAGE)
- 6 OPERATING TEMP : -10°C--+50°C
- 7 STORAGE TEMP : -20°C--+70°C
- 8 CONNECTION : PIN

REVISION RECORD		NAME	DATE
1			
2			
3			
4			

SGD Solomon Goldentek Display Corp	VERSION	C	UNIT	MM	NO.	1/6	GTE3027SA
	APPROVED		CHECKED				DRAWN

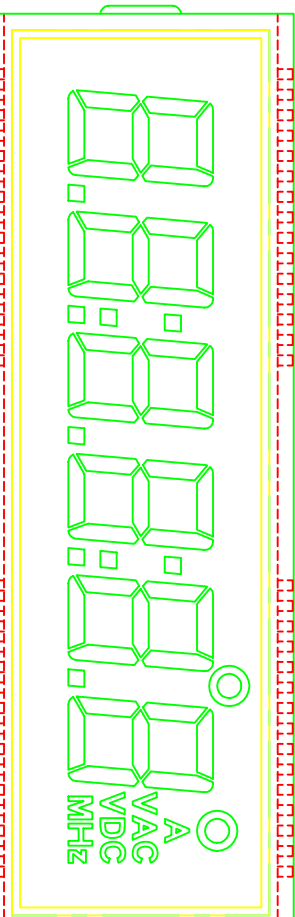

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
COM1	1F	1A		1B	2F	2A		2B		3F	3A		3B	4F	4A		4B		5F	5A
COM2			1G				2G					3G				4G				
COM3									Coil1									Coil2		


PIN	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
COM1		5B		6F	6A		6B			NC										
COM2	5G					6G				NC	1E		1C		2E		2C		3E	
COM3			Deg1					Deg2	A	NC		1D		1H		2D		2H		3D

PIN	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60
COM1																			COM1	NC
COM2	3C		4E		4C		5E		5C		6E		6C					COM2		NC
COM3		3H		4D		4H		5D		5H		6D		VAC	VDC	MHZ	COM3			NC

SGD[®] Solomon Goldentek Display Corp

VERSION C UNIT MM NO. 2/6 GTF3027SA


SEGMENT

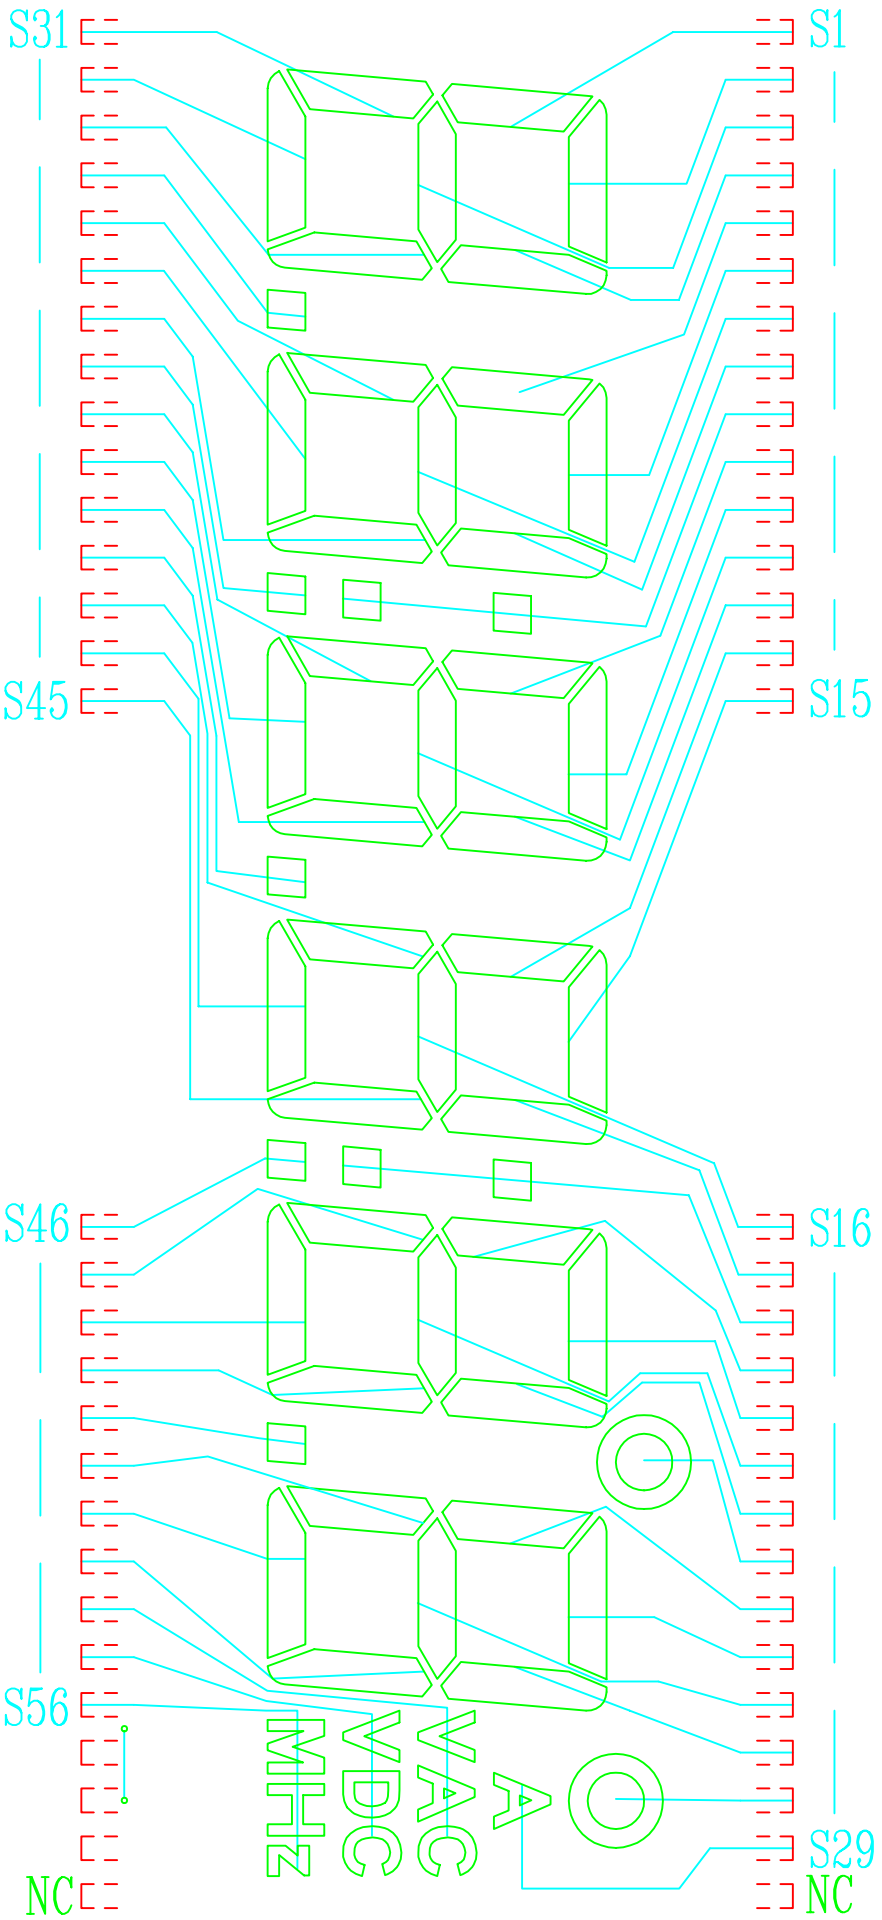

SGD[®] Solomon Goldentek Display Corp

VERSION	C	UNIT	MM	NO.	3/6	GTE3027SA


COMMON

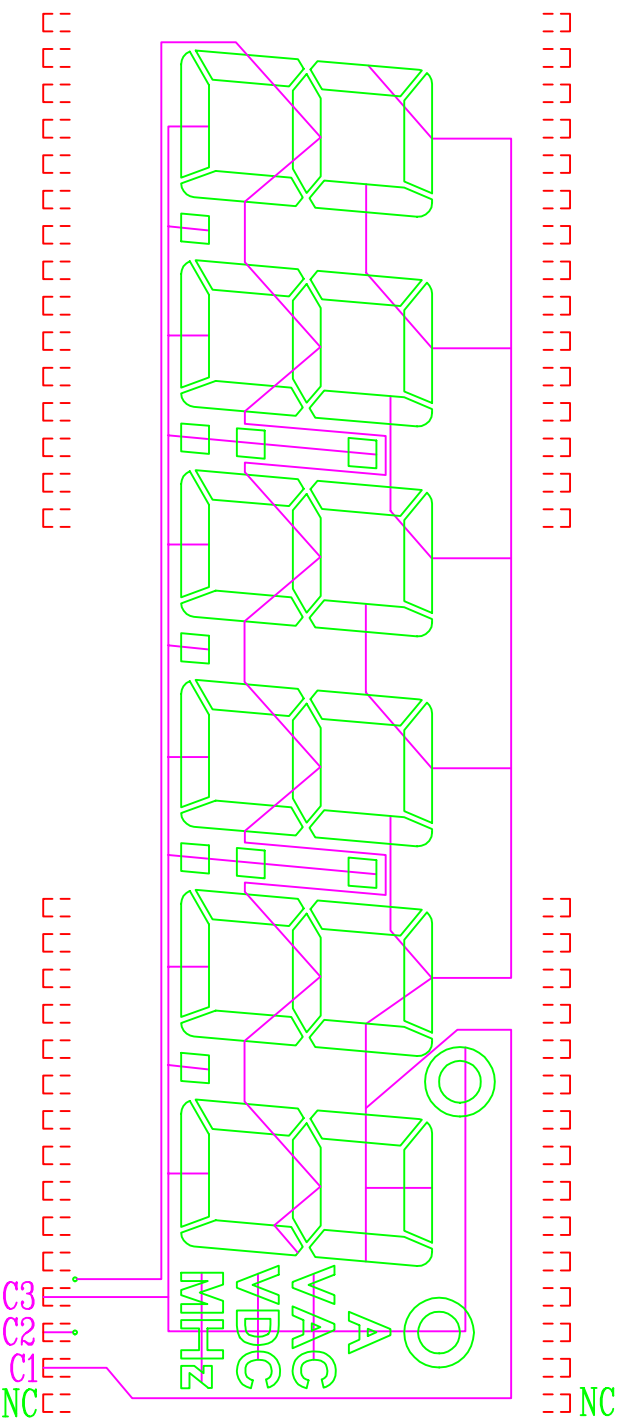

SGD[®] Solomon Goldentek Display Corp


VERSION	C	UNIT	MM	NO. 4/6	GTE3027SA



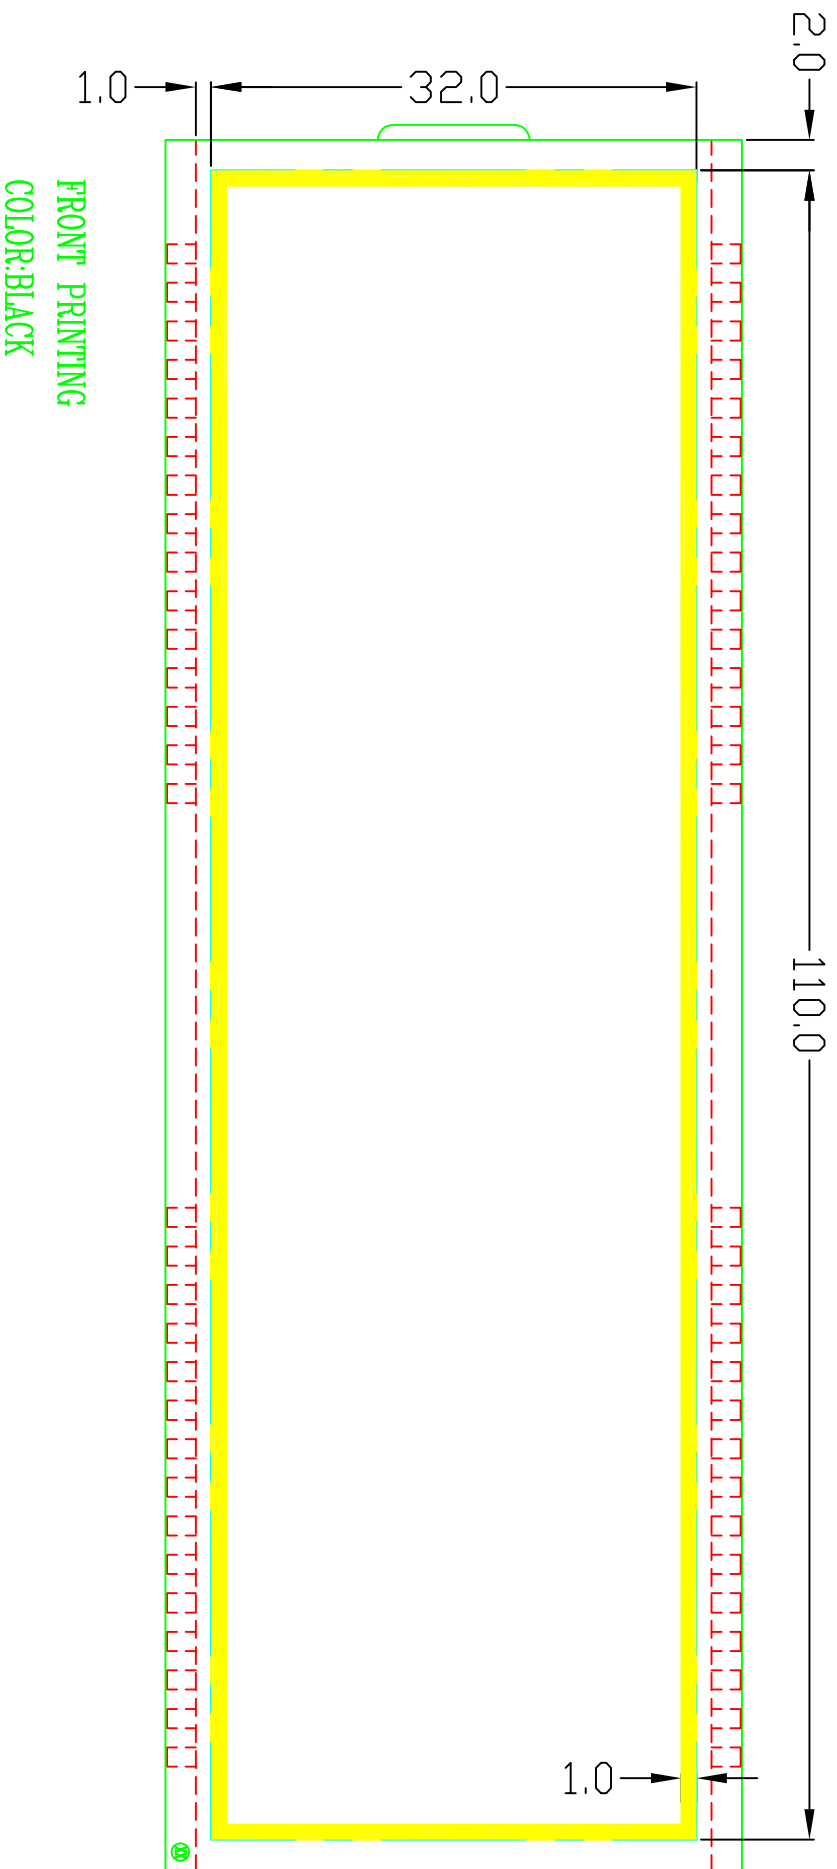

SGD[®] Solomon Goldentek Display Corp

VERSION	C	UNIT	MM	NO. 5/6	GTE3027SA
---------	---	------	----	---------	-----------

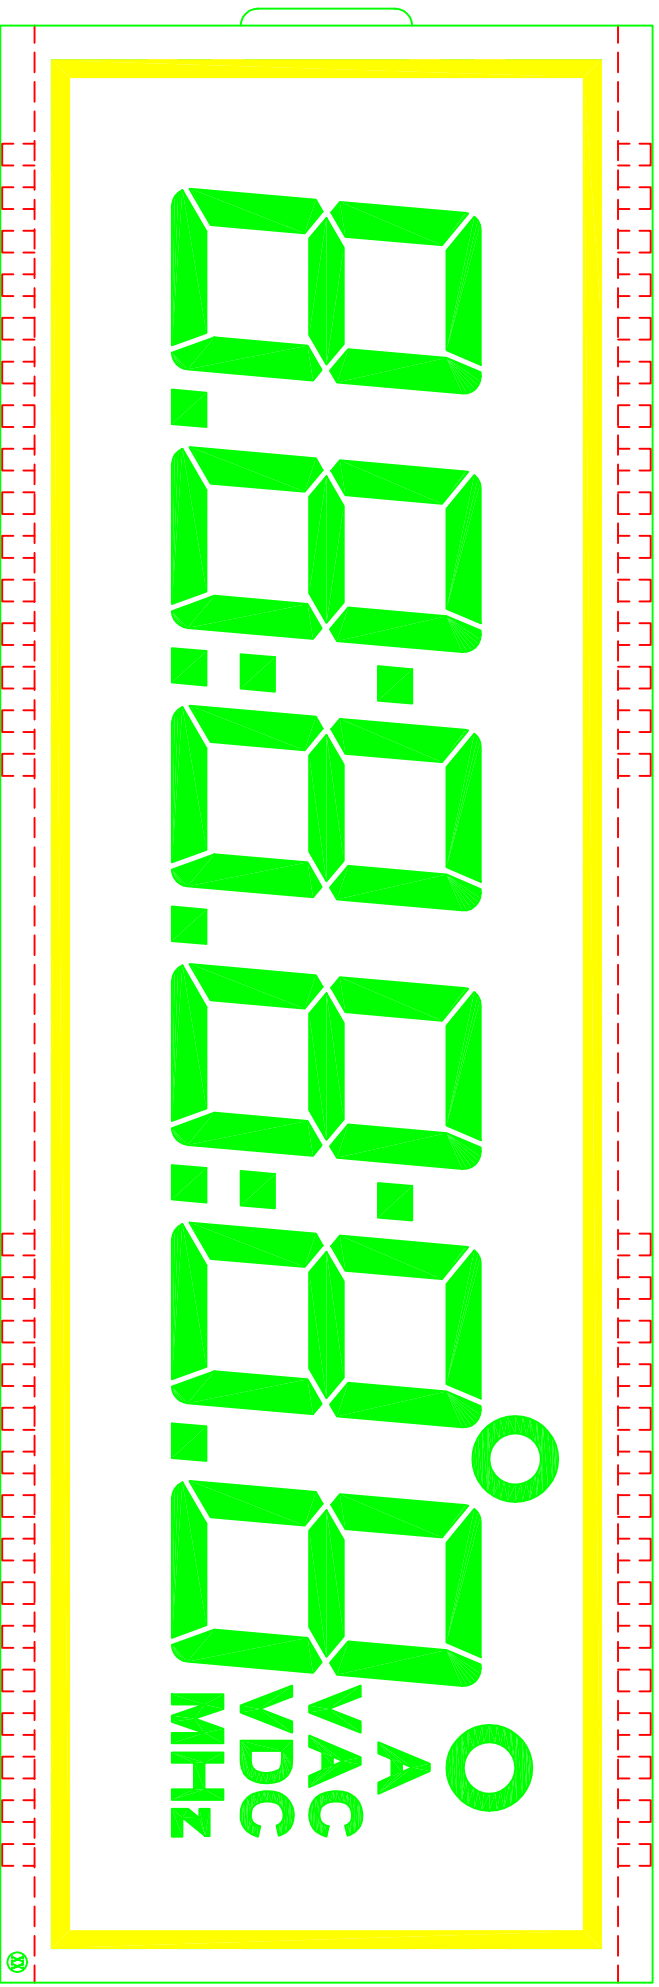

顯示效果圖

SGD[®] Solomon Goldentek Display Corp

VERSION

C

UNIT

MM

NO. 6/6

GTE3027SA