



PV INVERTER

Home Series / H4A_220

Product Features

- Wide input range from 30 to 600 Vdc
- Max. efficiency up to 97.5%
- Ultra light weight for easy installation and space-saving
- Built-in Wi-Fi communication
- Commissioning via App (iOS/Android)
- MyDeltaSolar cloud for remote monitoring
- Low noise emission with only 20 dB
- IP65 protective

www.deltaww.com




Product Overview


Delta produce H4A_220 solar inverter features 4.0 kVA power output. This new single solar inverter is designed for home PV systems which maximum versatility and profitability are important. With its 97.5% (max.) energy efficiency and the capability for connecting to MyDeltaSolar cloud and app, H4A_220 can ensure management efficiency and optimum yield from PV systems.



Form Factor

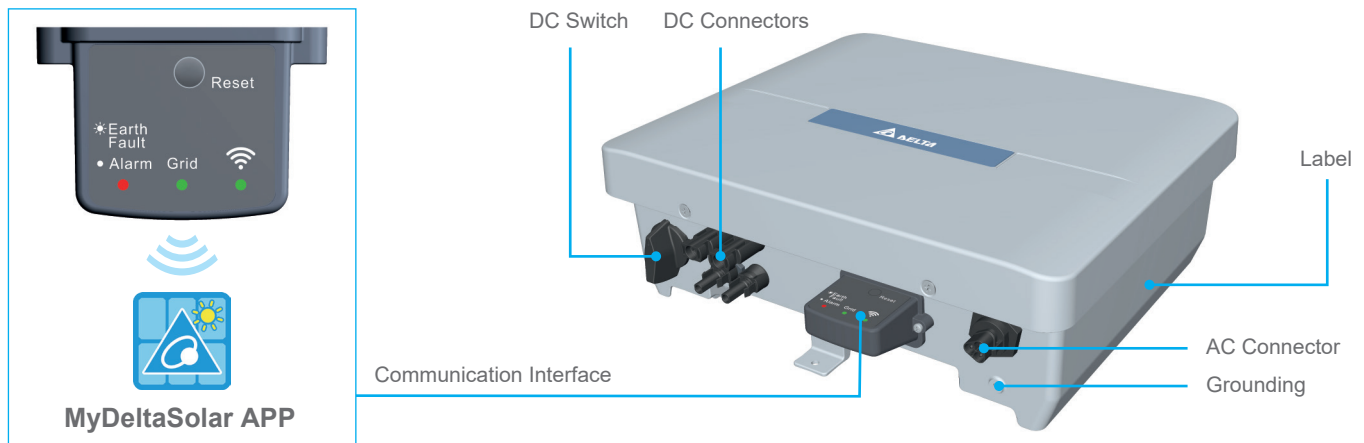

System Architecture

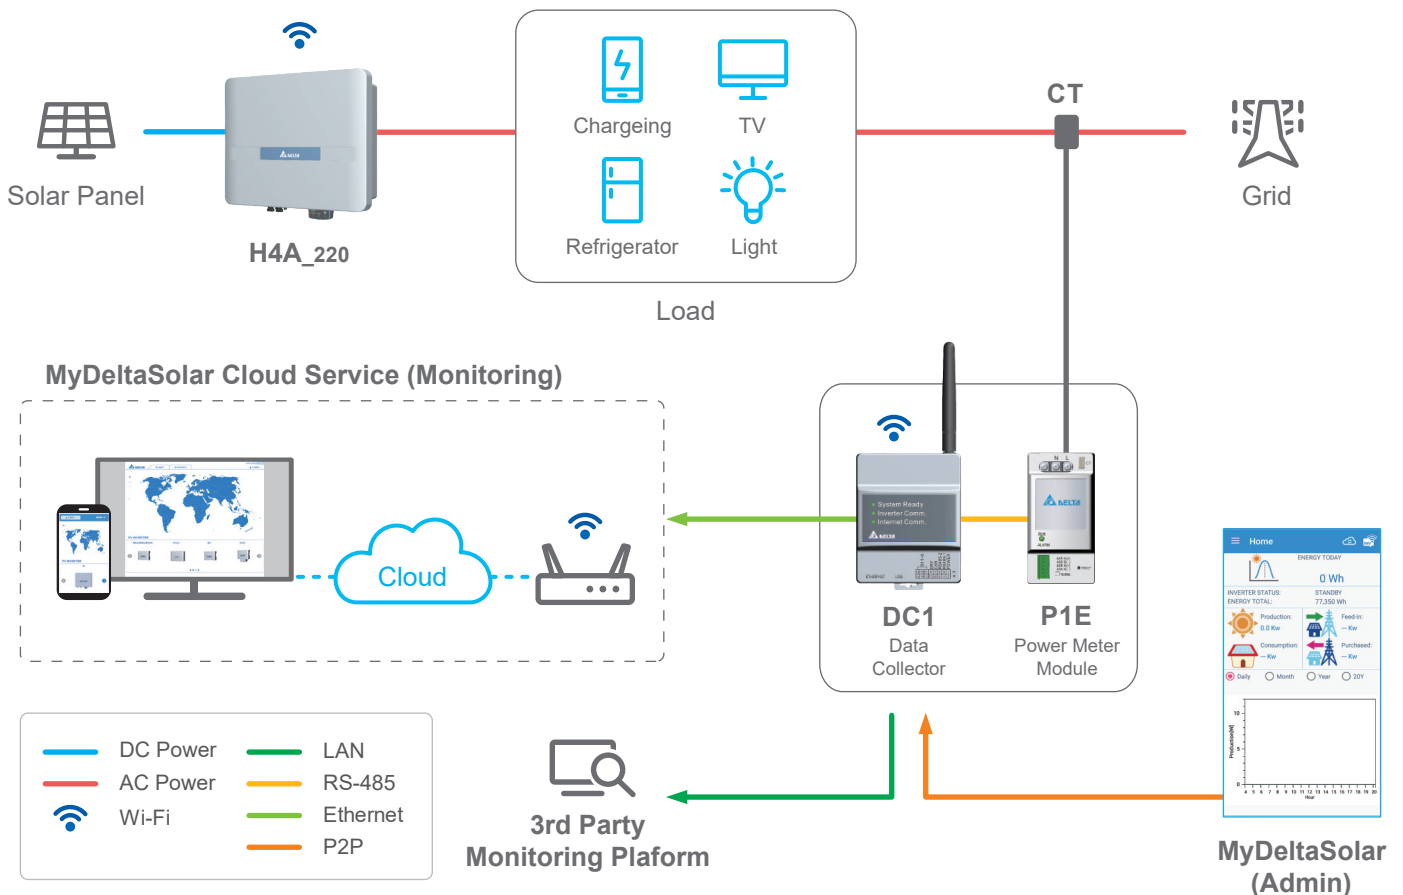


*Only one communication protocol (LAN, Ethernet, Wi-Fi) can be used at the same time


MyDeltaSolar



Install



Home



Setting



Management



Energy



- MyDeltaSolar cloud offers home user an online monitoring service
- Proactive e-mail notification during inverter alarm (i.e. ground fault alarm)

Specifications

Model Number	H4A_220					
DC Input						
Max. Input Voltage	600 V					
Operating Voltage Range	30 - 500 V					
MPP Voltage with Max. Power	240 - 500 V					
Start Up Voltage	> 35 V					
Rated Voltage	360 V					
Max. Input Current	11Adc for each / 18Adc for total					
Mpp Tracker	2					
Connection Type	MC4 2 pairs					
DC Switch	Yes					
AC Output						
Max. Output Power	4000 W / 4000 VA					
Max. Output Current	18.6 A					
Rated Voltage	220 / 230 V					
AC Voltage Range	180 - 280 V					
Frequency Range	50 / 60 Hz (± 5 Hz)					
THD	< 3%					
Reactive Power	0.8 Ind ~ 0.8 Cap					
Night Time Power Consumption	< 2W					
Efficiency						
Peak Efficiency	97.5 %					
Euro Efficiency	96.8 %					
Information						
Communication	Wi-Fi					
Indicator	LED					
Display	MyDeltaSolar APP (iOS / Android)					
Cloud	MyDeltaSolar Cloud					
Alarm	Mail Notification					
Certification						
	VDE-AR-N 4105 VDE 0126-1-1/A1	AS4777.2:2015 EN 50438	EN 61000-6-2 EN 61000-6-3	EN 50438 EN 61000-6-2	EN 61000-6-3 IEC 62116	G83/2
General Data						
Operating Temp. Range	-25 to +60°C					
Protection Level	IP65					
Noise Emission, Typical	20 dB (A)					
Operating Elevation	< 2000 m					
Cooling	Natural cooling					
Dimensions (W × H × D)	380 x 318 x 130 mm					
Weight	11 kg					

*All specifications are subject to change without prior notice



Delta Electronics, Inc.

39 Section 2 Huandong Road, Shanhua Township,
Tainan County 74144, Taiwan, R.O.C.

TEL : +886 6 505-6565

FAX : +886 6 505-1919

info@deltaww.com