

LED Highbay Light

HBL-02-G4



Better solutions for a Led Highbay Light


IP65 water-proof

AC100-240V 50/60Hz

Easy Installation

140Lm/w
Operating Temp.: -40°C~+50°C
Storage Temp.: -40°C~+80°C

Options


Power

MEAN WELL DRIVER
HBG series B: Dimmable 1-10V
HBG series AB
ELG series A: Standard
ELG series B: Dimmable 0-10V
ELG series DA: Dimmable DALI

Color

3000K
4000K
5700K

Beam Angle

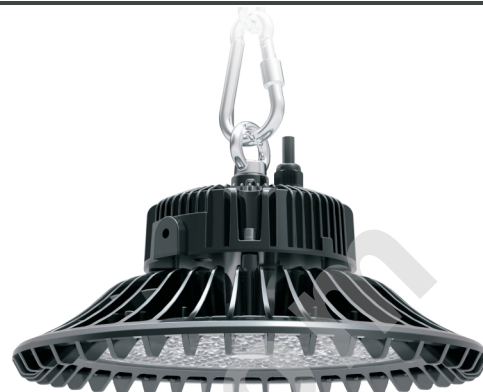60°
90°
120°


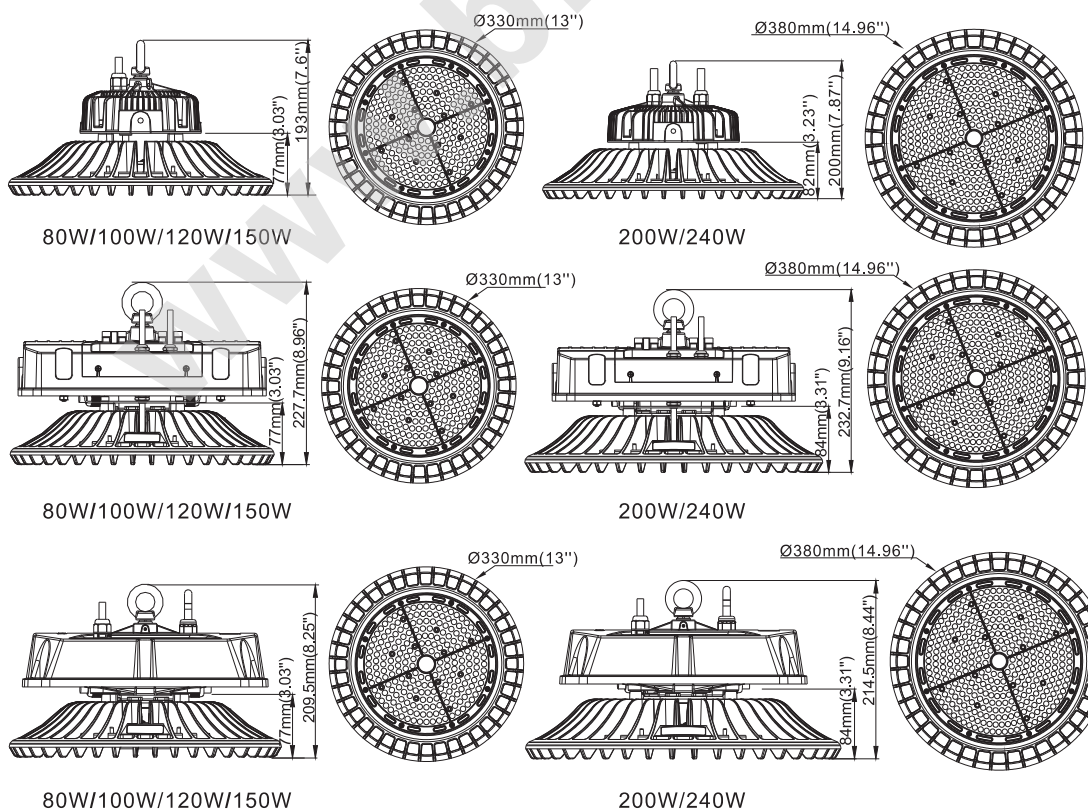
Application

Factories, Steel Mills, Steel Smelting Plants, Manufacturing Plants & Warehouses
Farms and Industrial Installations, sport Facilities & Workshops, Storage Facilities & Warehouses
Supermarkets & Department Stores, Showrooms, Design Centers & Galleries.


Specifications

Item	Power	Lumen	Leds	CRI	Weight	Beam Angle
BR-HBL80W-02-G4	80W	11200Lm	LUMILEDS 3030	> 80	3.50kg	60°/90°/120°
BR-HBL100W-02-G4	100W	14000Lm	LUMILEDS 3030	> 80	3.50kg	60°/90°/120°
BR-HBL120W-02-G4	120W	16800Lm	LUMILEDS 3030	> 80	3.50kg	60°/90°/120°
BR-HBL150W-02-G4	150W	21000Lm	LUMILEDS 3030	> 80	3.50kg	60°/90°/120°
BR-HBL200W-02-G4	200W	28000Lm	LUMILEDS 3030	> 80	5.50kg	60°/90°/120°
BR-HBL240W-02-G4	240W	33600Lm	LUMILEDS 3030	> 80	5.50kg	60°/90°/120°

Dimensions(mm)



Photometry

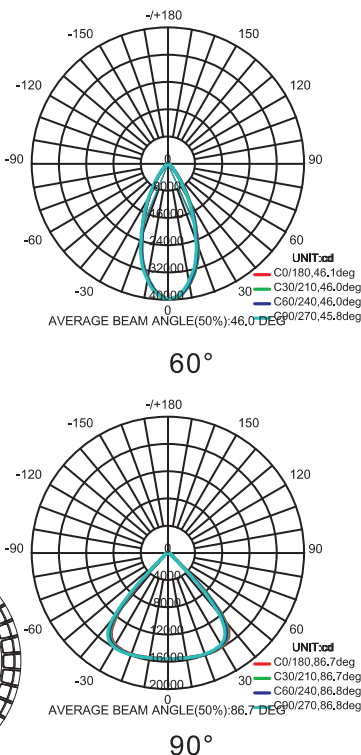

HBL-02-G4



Model Options

P1



P3



P5



P2



P4




P6




Installation and use

P1 Mounting Ring (Standard)

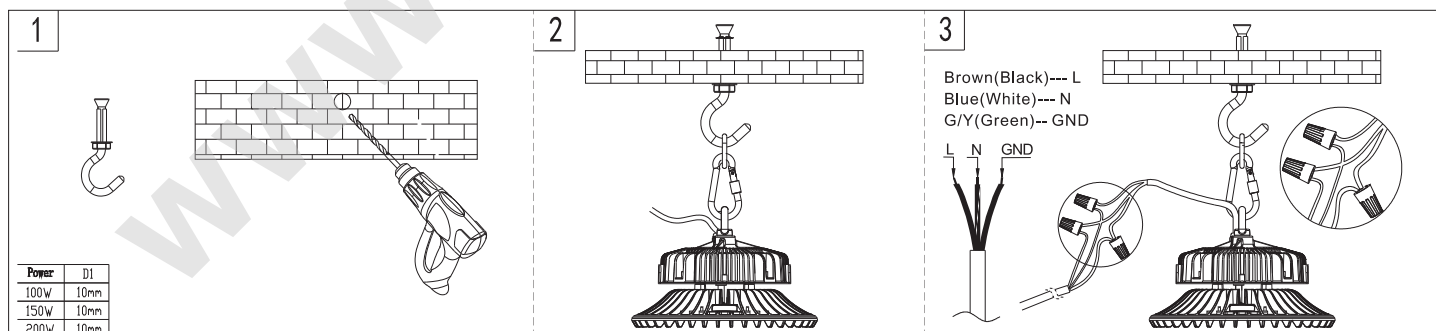


P2 Mounting Bracket A

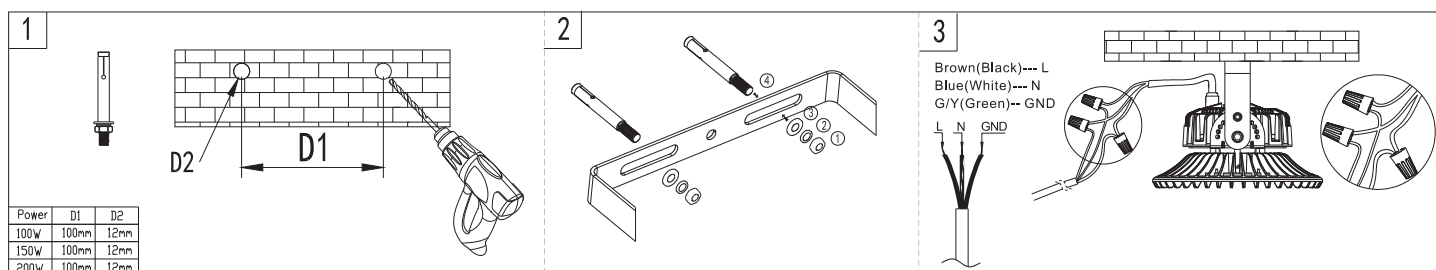


HBL-02-G4 LED Highbay Lights


P3 Mounting Ring

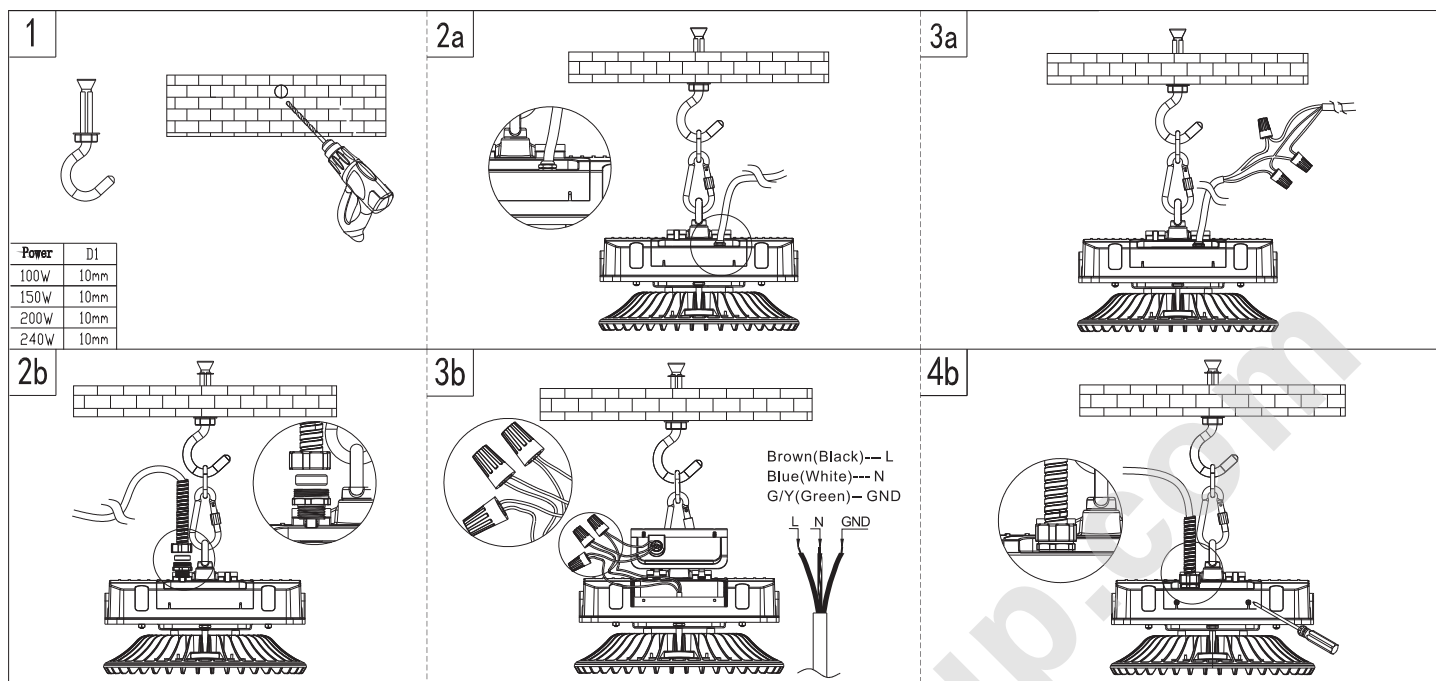


P4 Mounting Bracket B

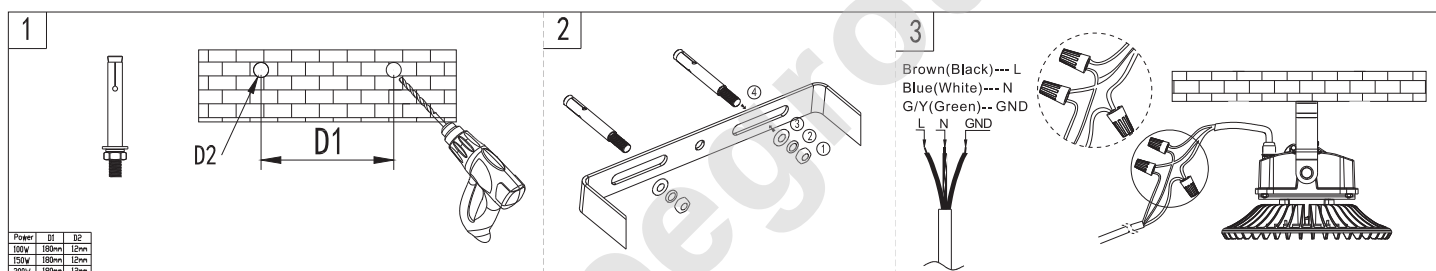

P5 Mounting Ring

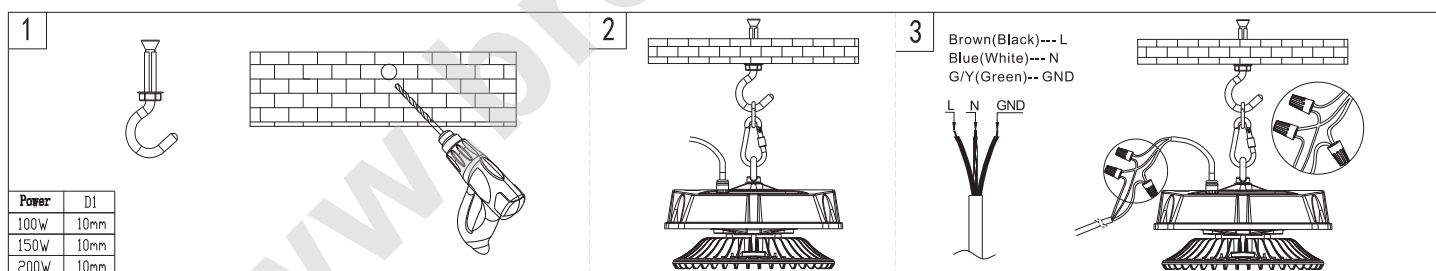

P6 Mounting Bracket C

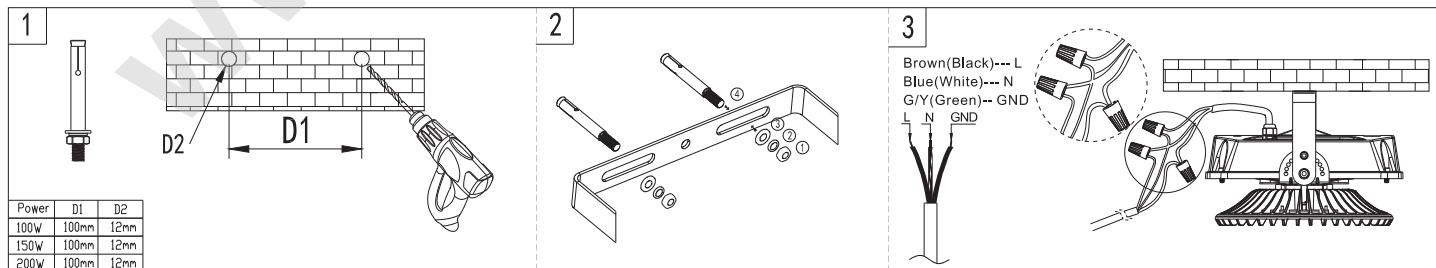

Packing Spec

Item	Box			Carton		
	Measurement(mm)	Gross weight	Pcs/box	Measurement(mm)	Gross weight	Pcs/box
BR-HBL80W/100W-02-G4	L415*W415*H290	5.12kg	1	/	/	/
BR-HBL120W/150W-02-G4	L415*W415*H290	5.12kg	1	/	/	/
BR-HBL200W/240W-02-G4	L465*W465*H310	7.68kg	1	/	/	/