


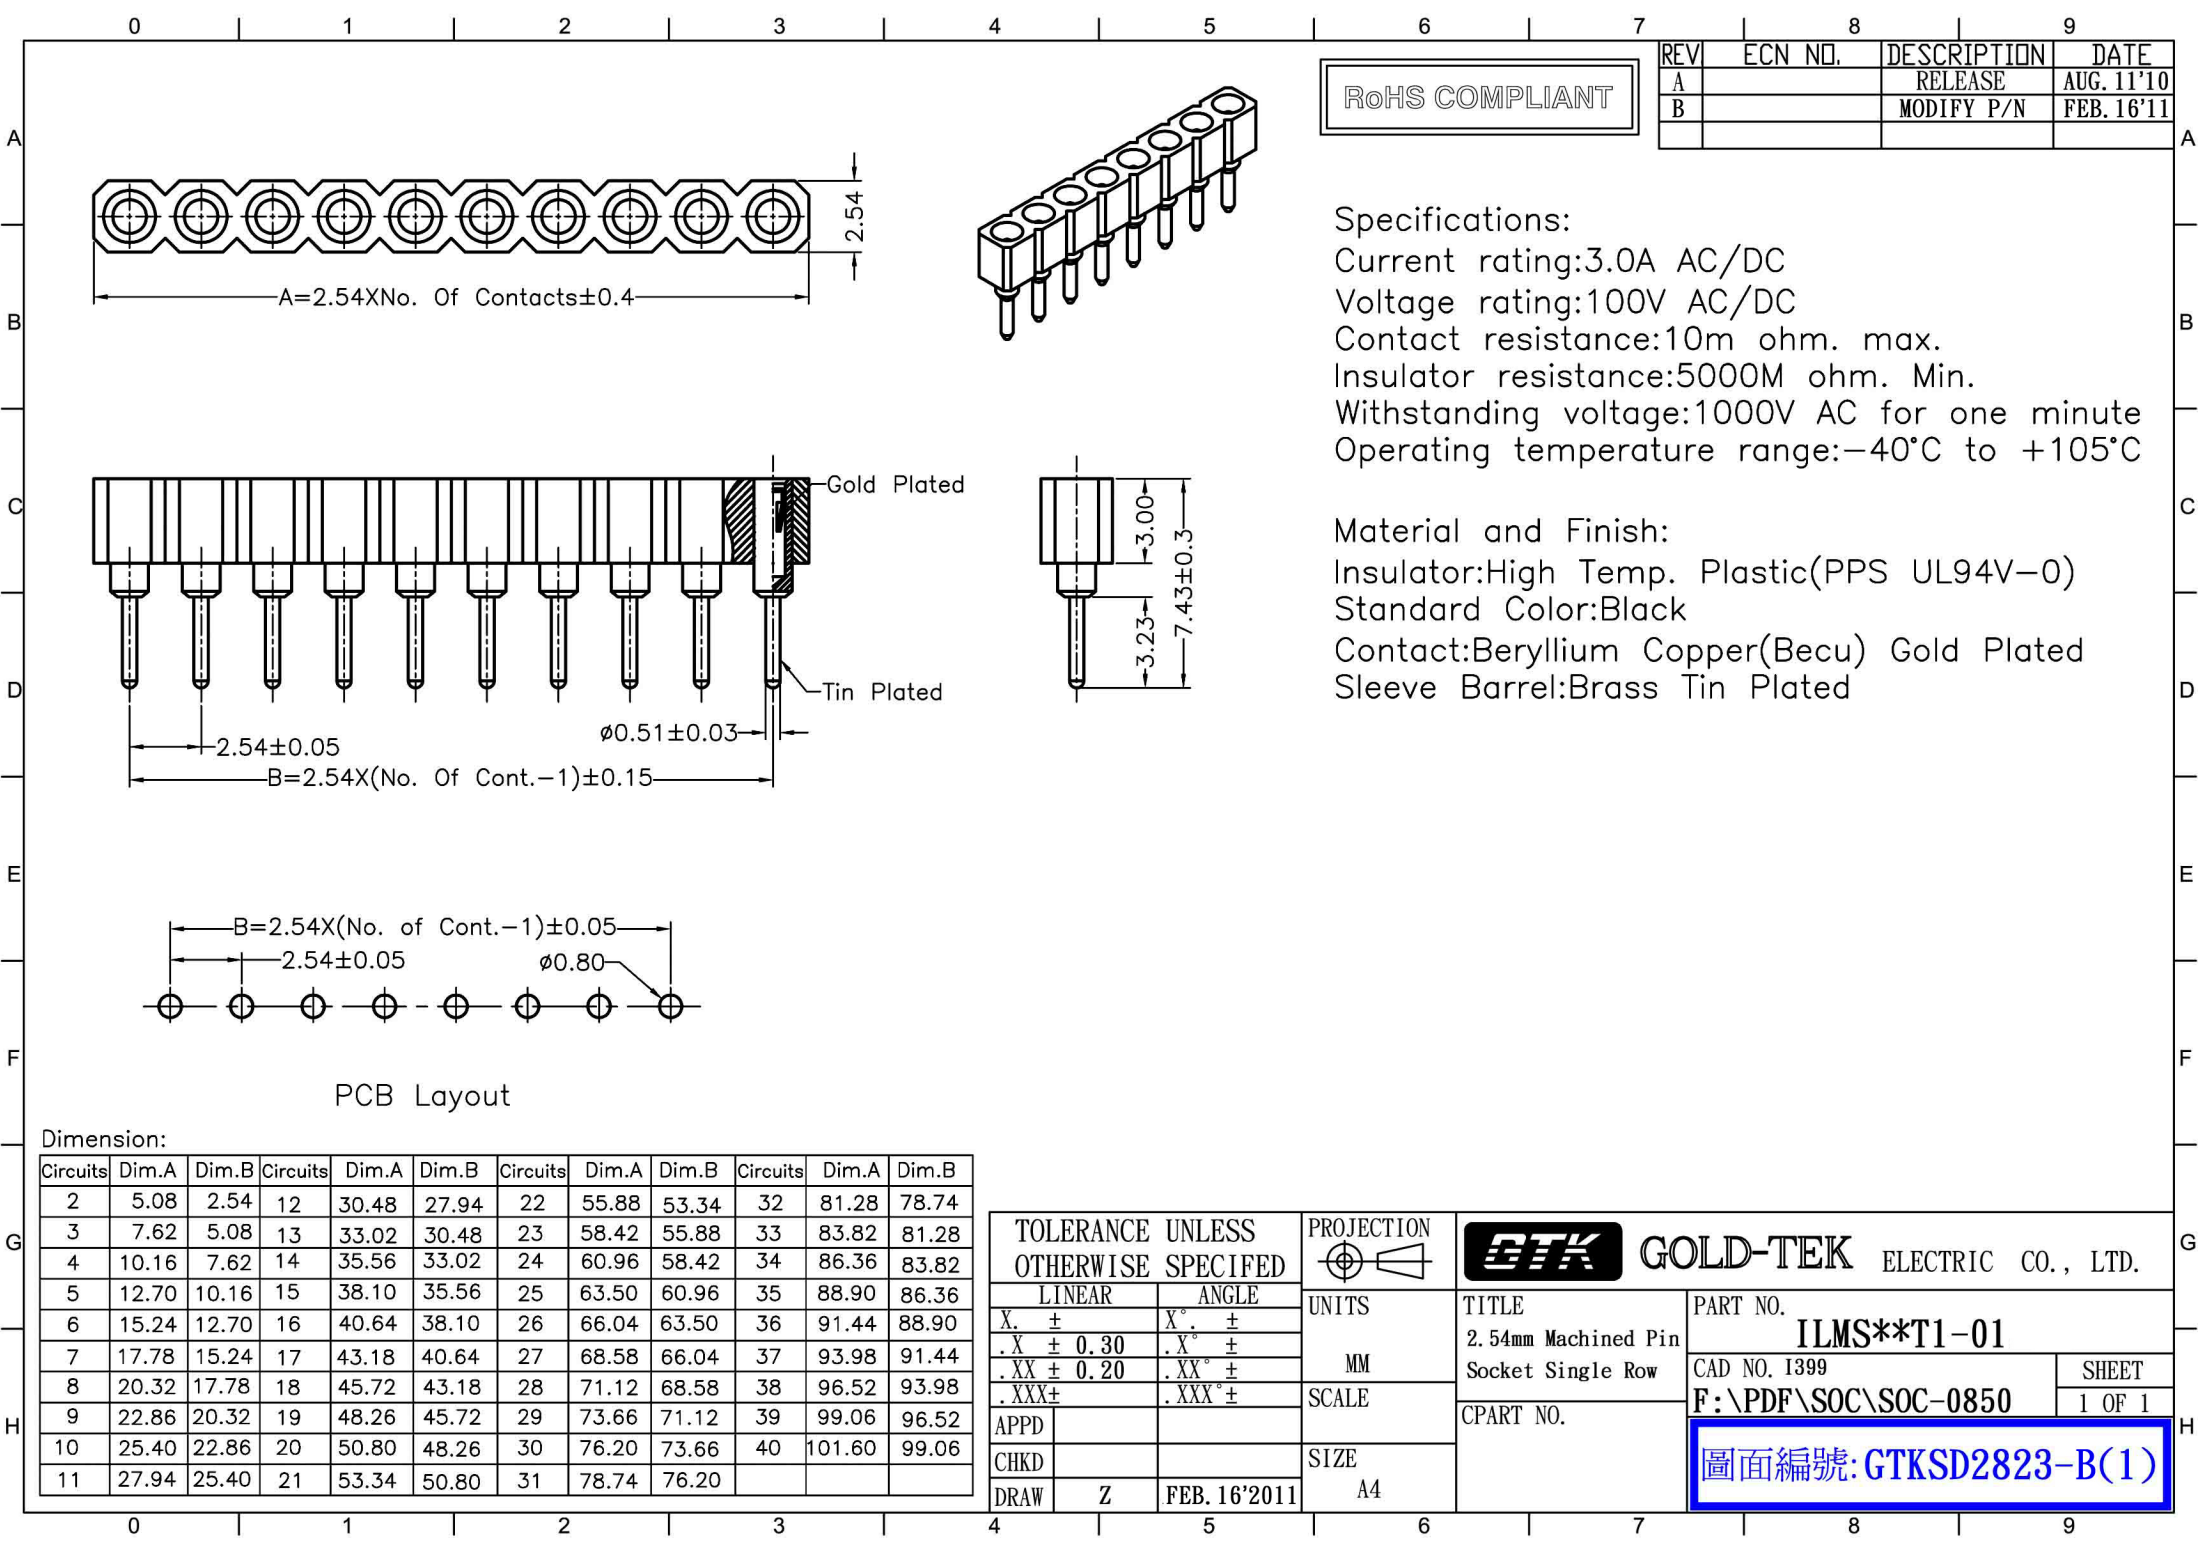

RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	AUG. 11'10
B		MODIFY P/N	FEB. 16'11

Specifications:
Current rating:3.0A AC/DC
Voltage rating:100V AC/DC
Contact resistance:10m ohm. max.
Insulator resistance:5000M ohm. Min.
Withstanding voltage:1000V AC for one minute
Operating temperature range:-40°C to +105°C

Material and Finish:
Insulator:High Temp. Plastic(PPS UL94V-0)
Standard Color:Black
Contact:Beryllium Copper(Becu) Gold Plated
Sleeve Barrel:Brass Tin Plated

PCB Layout

Dimension:

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
2	5.08	2.54	12	30.48	27.94	22	55.88	53.34	32	81.28	78.74
3	7.62	5.08	13	33.02	30.48	23	58.42	55.88	33	83.82	81.28
4	10.16	7.62	14	35.56	33.02	24	60.96	58.42	34	86.36	83.82
5	12.70	10.16	15	38.10	35.56	25	63.50	60.96	35	88.90	86.36
6	15.24	12.70	16	40.64	38.10	26	66.04	63.50	36	91.44	88.90
7	17.78	15.24	17	43.18	40.64	27	68.58	66.04	37	93.98	91.44
8	20.32	17.78	18	45.72	43.18	28	71.12	68.58	38	96.52	93.98
9	22.86	20.32	19	48.26	45.72	29	73.66	71.12	39	99.06	96.52
10	25.40	22.86	20	50.80	48.26	30	76.20	73.66	40	101.60	99.06
11	27.94	25.40	21	53.34	50.80	31	78.74	76.20			

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION	GOLD-TEK ELECTRIC CO., LTD.	
LINEAR	ANGLE	UNITS MM SCALE SIZE A4	TITLE	PART NO.
$X \pm 0.30$	$X^\circ \pm$		2.54mm Machined Pin	ILMS**T1-01
$.XX \pm 0.20$	$.XX^\circ \pm$		Socket Single Row	CAD NO. 1399
$.XXX \pm$	$.XXX^\circ \pm$		CPART NO.	SHEET 1 OF 1
APPD			F:\PDF\SOC\SOC-0850	
CHKD			圖面編號:GTKSD2823-B(1)	
DRAW	Z	FEB. 16'2011		