



REV	ECN NO.	DESCRIPTION	DATE
A	GTKSD0192	RELEASE	DEC.19.01

ILMS**A3

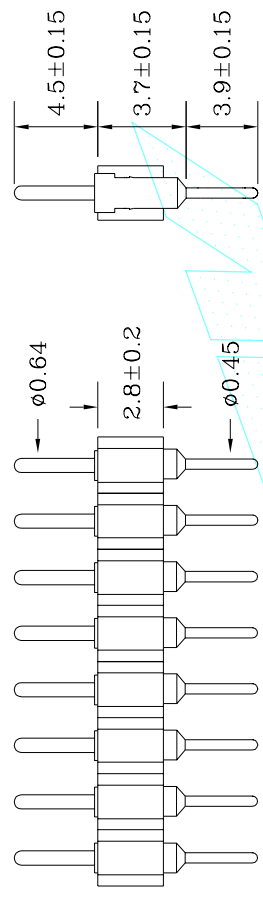


Specifications:
 Contact Resistance: 30mΩ max. at DC 100mA
 Insulator Resistance: 1000MΩ min. at DC 500V
 Current Rating: 1 AMP
 Dielectric Withstanding Voltage: AC 500V For 1 minute
 Operating Temperature: -55° C ~ +105° C
 Contact: Beryllium Copper
 Housing: PPS & 30% Glass Fiber (UL 94V-0)


DIMENSIONS	
A	2.54*POSITION NO.
B	2.54*(POSITION NO.-1)

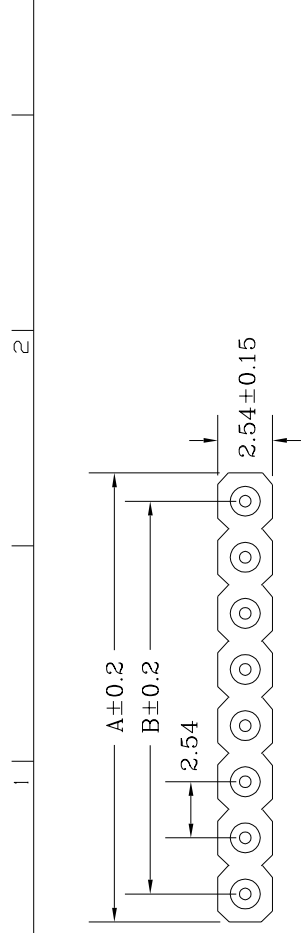


ILMS**T1

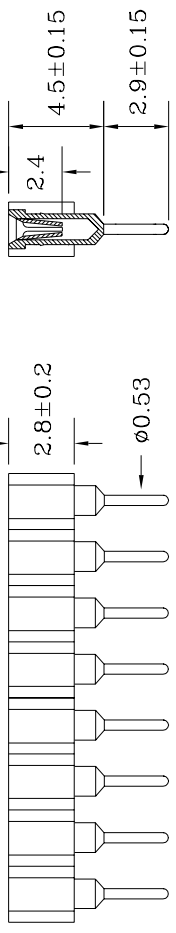

ILMS**T2

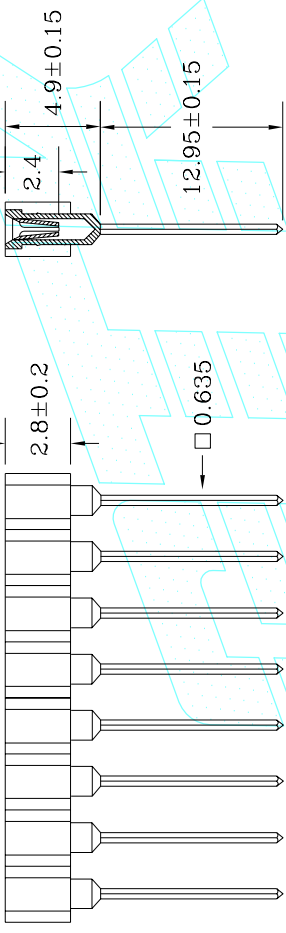

ILMS**T6

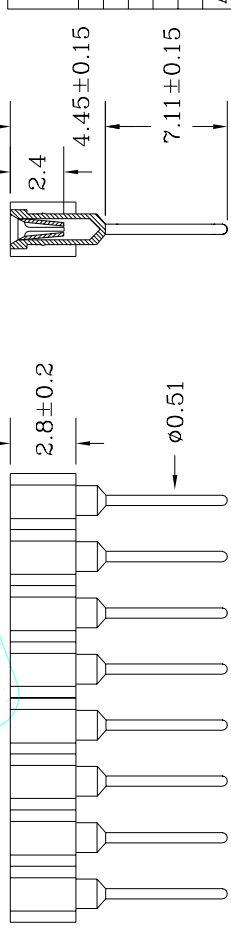

TOLERANCE UNLESS OTHERWISE SPECIFIED	PROJECTION	GOLD-TEK ELECTRIC CO., LTD.
LINEAR	UNITS	PART NO. ILMS*****
ANGLE	SIP SOCKET MACHINED PIN	CAD NO. F:\Drw\PH\PH-0108
X. ±	SCALE	SHEET 1 OF 1
X° ±	SIZE	
.X ±	A4	
.XX ±		
.XXX ±		
APPD		
CHKD		
DRAW Tao.Tao.	DEC.20'2001	

圖面編號:GTKSD0192-A(1)