


RoHS COMPLIANT



REV	ECN NO.	DESCRIPTION	DATE
A	GTKSD0497	RELEASE	DEC. 24. 01
B		MODIFY POSITION	NOV. 13. 02
C		REDRAWN	JAN. 16. 03
D		ADD. POSITION	NOV. 30' 05
E		ADD. CODE	FEB. 23' 10
F		MODIFY P/N	MAR. 02' 11

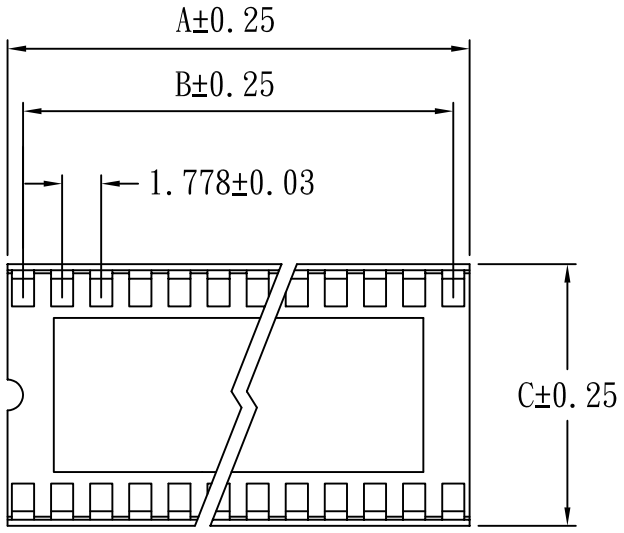

ELECTRICAL
 Contact Resistance: 20mΩ initial 30mΩ after test.
 Insulator Resistance: 5000MΩ min.
 Current Rating: 1 AMP.
 Dielectric Withstandng Voltage: 1000V RMS/minute.
 Operating Temperature: -25°C ~ +85°C.

MATERIAL
 Contact: Phosphor Bronze, Thickness:0.17mm.
 Plating:Sn-Cu Plated. (Lead free)
 Insulator: PBT-4830 UL94V-0.

Position	Dimension				CODE (/0*)
	A±0.25	B±0.10	C±0.10	D±0.20	
16	14.22	12.45	10.10	7.62	03
20	17.78	16.00	10.10	7.62	
22	19.56	17.78	10.10	7.62	
24	21.34	19.56	10.10	7.62	04
24	21.34	19.56	12.65	10.16	
28	24.89	23.11	12.65	10.16	
30	26.67	24.89	12.65	10.16	
32	28.45	26.67	12.65	10.16	06
40	35.56	33.78	17.70	15.24	
42	37.34	35.56	17.70	15.24	
48	42.67	40.89	17.70	15.24	
52	46.23	44.45	17.70	15.24	
54	48.01	46.23	17.70	15.24	
56	49.78	48.01	17.70	15.24	
58	51.56	49.78	17.70	15.24	
60	53.34	51.56	17.70	15.24	
62	55.12	53.34	17.70	15.24	
64	56.90	55.12	17.70	15.24	
64	56.90	55.12	21.55	19.05	07

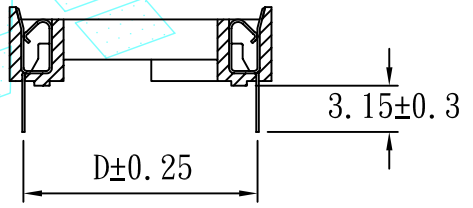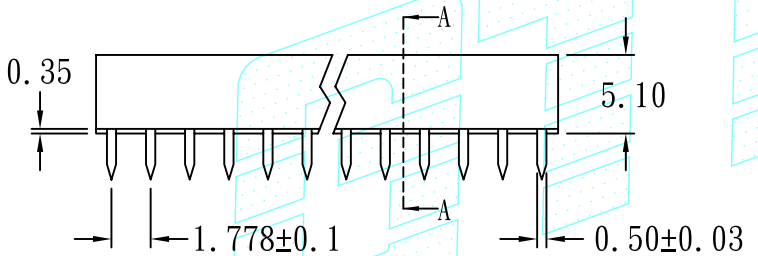

Section A-A

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION	GOLD-TEK ELECTRIC CO., LTD.
LINEAR	ANGLE		
X. ±	X°. ±	UNITS	TITLE
.X ± 0.30	.X° ±	MM	1.778mm IC SOCKET HIGH DENSITY TYPE
.XX ± 0.20	.XX° ±	SCALE	PART NO. ISHS**T1-0*
.XXX±	.XXX° ±	SIZE	CAD NO. F:\Drw\PH\PH-0114
APPD		A4	SHEET 1 OF 1
CHKD			
DRAW	Z. MAR. 02' 2011		

圖面編號:GTKSD0497-F(1)