


未注公差/General tolerances (mm)												0.1/10		
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400		>400 ~ 500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'

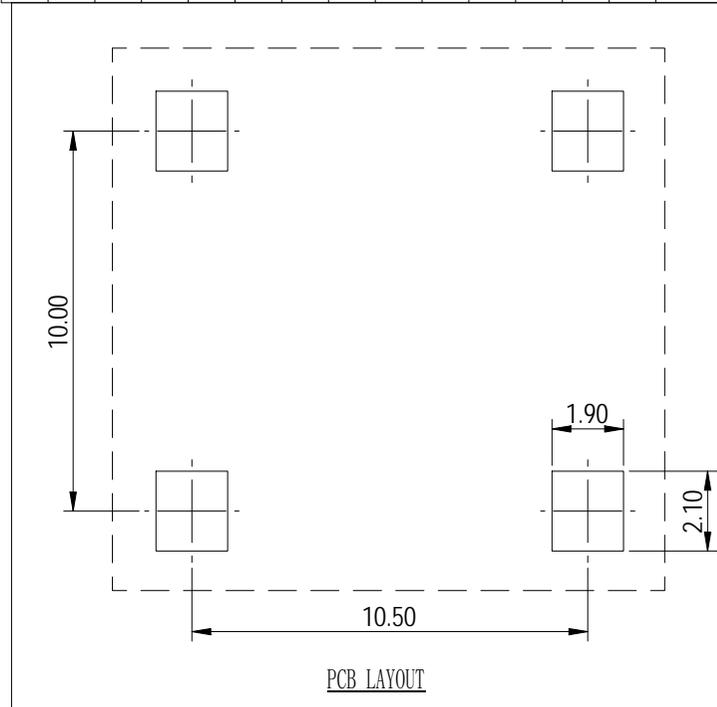

3	Screw	Steel	Ni Plated
2	Nut	Steel	Sn Plated
1	Pin header	Copper alloy	Sn Plated
ITEM	NAME OF PART	MATERIAL	NOTES
额定电流/Current(A)			80A
螺丝扭矩/Torque Tightening(N·m/Lb.in)			M5, 2.4/21.05
符合RoHS环保要求/Conform to RoHS			Yes

		MATERIAL:	SURFACE/COLOR:		
		MAT NO./REV: 1090000090-1 / 01	MAT STATUS: 批量		
APPD: 兰春华	2024.10.17	NAME			
CHKD: 曹利彬	2024.10.16	K68-01Z(H)			
DRFT: 申玉堂	2024.10.16				
DRAWING NO. 200314547		TYPE	DRAWING STATUS	SCALE	SHEET
		CUSTOMER DRAWING	已发布	2:1	1/1

REV	ECN	DESCRIPTION	DRFT	DATE
00			申玉堂	2024.10.16

Transfer or duplication of this document as well as the utilization or communication of its content are prohibited unless authorized in writing. All rights reserved for patent, utility model or design registrations. 除专利等明确标注外，其他内容均受法律保护。未经许可，不得复制或传播。 兰昌公司保留对涉及发明、实用新型及外观设计的所有权利。