
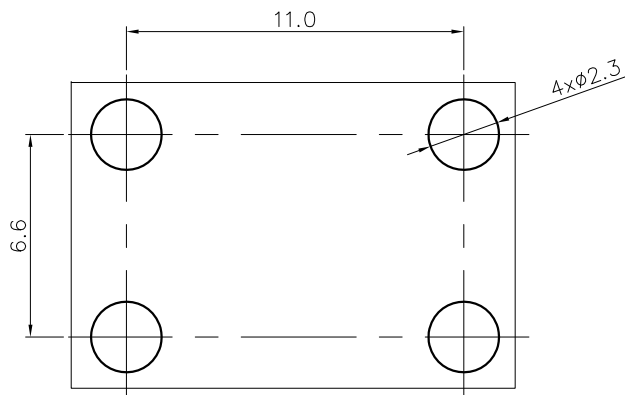


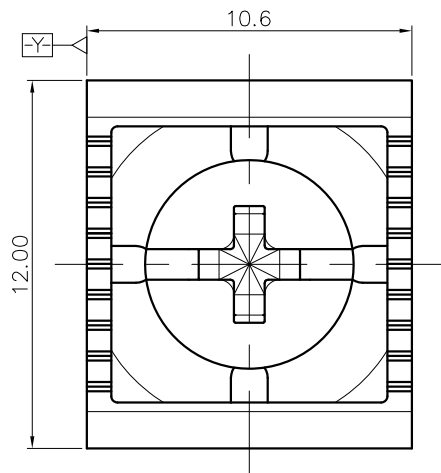



PCB LAYOUT

NOTES:

- 1.Current : 40A
- 2.Torque value : M4 , 1.2N·m
(10.53Lb.in,12.24kgf·cm)
- 3.Dimension shall be interpreted per
ASME Y14.5-2009
- 4.Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm				-	∩	□
TO	Over	Over	TO	Over	Over	Over	0.1/10		
6	10	10	30	30	60	100	0.1/10		
6	10	24	30	60	100	150			
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°	

5.RoHS Compliance

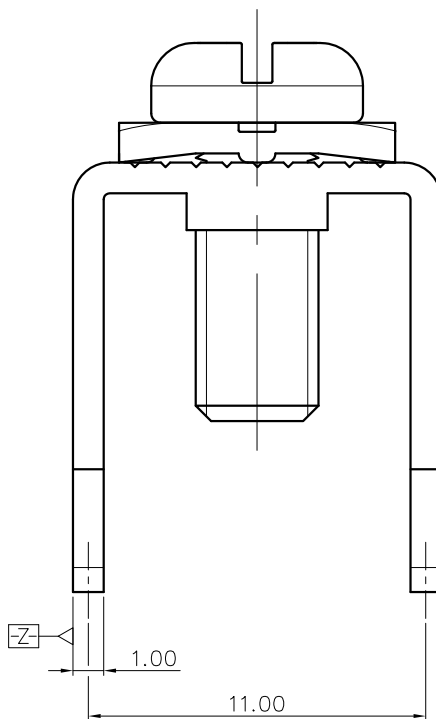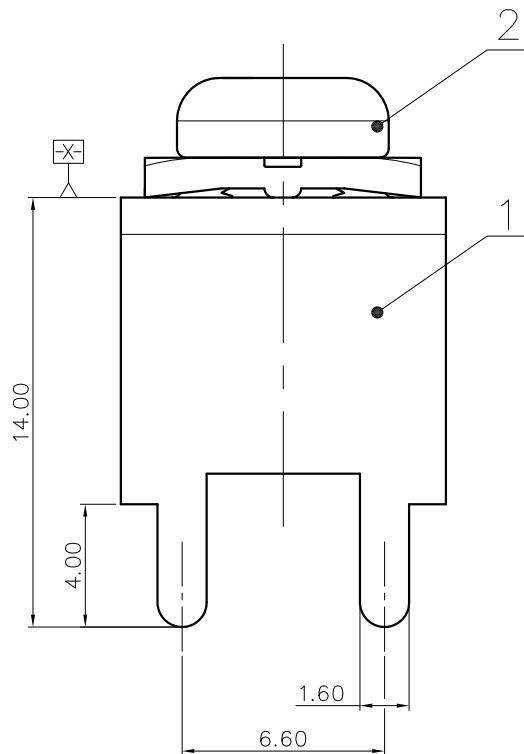

Notes: The A&Z(H) in the name means:A(H) and Z(H)

2	Screw	Steel	M4/Ni Plated
1	Pin header	Copper alloy	M4/Sn Plated
ITEM	NAME OF PART	MATERIAL	NOTES

			MATERIAL: /		SURFACE/COLOR: /				
			MAT NO./REV: /		MAT STATUS: 批量				
APPD:	蓝贵凡	2023.05.04	NAME K99-00A&Z (H)						
CHKD:	曹利彬	2023.05.04							
DRFT:	孙科豪	2023.05.04	DRAWING NO.		TYPE		DRAWING STATUS	SCALE	SHEET
 A4 			/		CUSTOMER DRAWING		已发布	1:1	1/1

00	/	/	孙科豪	2023.05.04
REV	ECN	DESCRIPTION	DRFT	DATE