


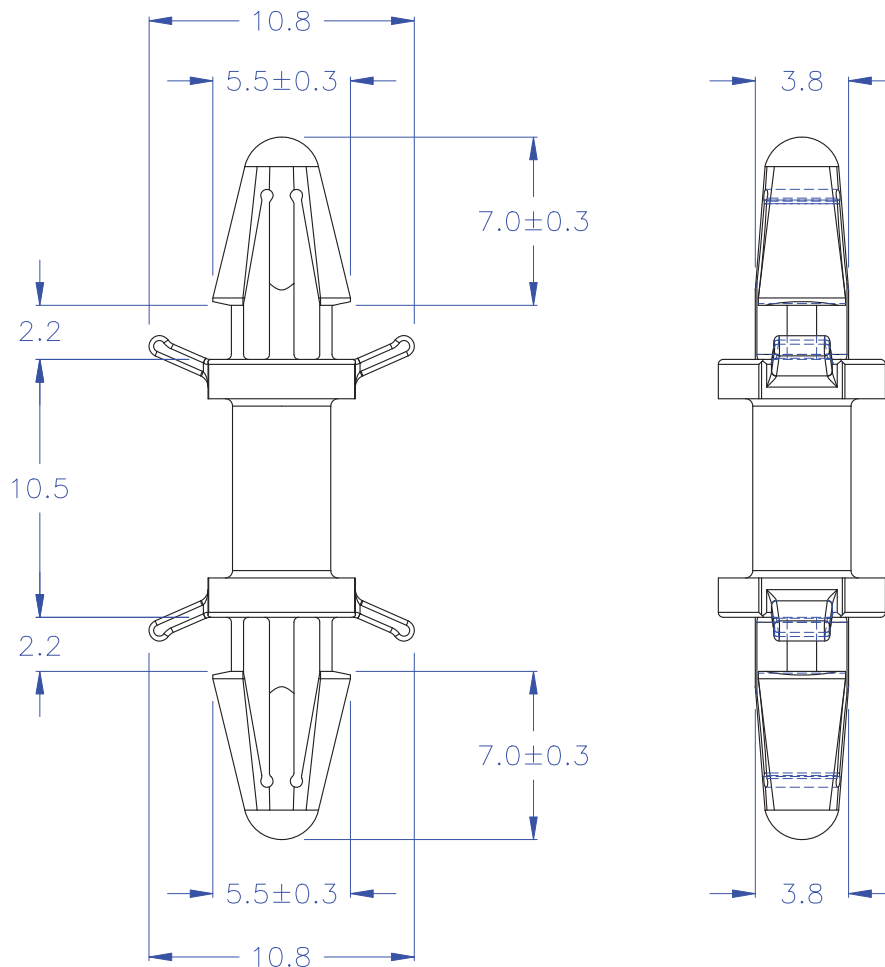

◎ HOLE IN P.C.B.: $\phi 4.0^{+0.05}_{-0}$ mm
 ◎ P.C.B. THICKNESS: 0.8~1.8 mm

Component - Plastics

Guide Information

E I DUPONT DE NEMOURS & CO INC

Mobility & Materials, 200 Powder Mill Road #304, Wilmington DE 19803

101(r9)(f1), 101F(r9)(f1), 101L(r9)(f1), E101(r9)(f1), E101L(r9)(f1)

Polyamide 66 (PA66) "Zytel", furnished as pellets

Color	Mn. Thk (mm)	Flame Class	HW	HA	RTI Elec	RTI Imp	RTI Str
ALL	0.71	V-2	4	0	130	75	85
	1.5	V-2	3	0	130	75	85
	3.0	V-2	2	0	130	75	85
	6.0	V-2	2	0	130	75	85

Comparative Tracking Index (CTI): 0

Dielectric Strength (kV/mm): 13

High-Voltage Arc Tracking Rate (HVTR): 0

Dimensional Change (%): -

Inclined Plane Tracking (IPT) Kv: -

Volume Resistivity (10^9 ohm-cm): 14

Surface Resistivity (10^9 ohms/square): -

High Volt, Low Current Arc Resis (D495): 6

(f1) - Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C.

(r9) - Virgin and grind up to 50% by weight inclusive, have the same basic material characteristics for ALL colors down to 0.71mm. For thickness 0.40mm to 0.70mm the same basic material characteristics exist with the exception of generic RTIs for all properties and Regrid exceeding 25% is limited to V-2 Flammability for WT, RD, BK.

NOTE - (1) Material designations that are color pigmented may be followed by suffix letters and numbers. (2) Material designations may be prefixed by "ZYT" for Zytel or "MIN" for Minlon or "DEL" for Delrin or "CRA" for Crastin or "RYN" for Rynite or "ETPV" for ETPV or "SOR" for Sorona grades.

ANSI/UL 94 small-scale test data does not pertain to building materials, furnishings and related contents. ANSI/UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL.

Report Date: 1996-07-29


Last Revised: 2019-03-21

© 2021 UL LLC

cULus



◎ Halogen Free 低鹵
 ◎ ROHS 2.0
 ◎ ROHS 六項 compliant

PLASTIC TOLERANCE:			APPROVED BY		Steven	2021.12.06	 品固企業股份有限公司 品基電子(東莞)有限公司 蘇州品基電子科技有限公司 東莞市品隆商貿有限公司 鑽隆有限公司 PINGOOD ENTERPRISE CO.,LTD.	
L ≤ 10 ±0.2			REVIEWED BY		Jaob	2021.12.06		
10 < L ≤ 30 ±0.3			DRAWN BY		slony	2021.12.06		
30 < L ≤ 50 ±0.5								
50 < L ≤ 100 ±0.7			MATERIAL: N66 V2 or EQUIVALENT					
100 < L ≤ 250 ±1.2			COLOR: NATURAL					
ABOVE 250 ±1.5								
	UNIT	SCALE	PART NAME:					VERSION
	mm		P. C. 板間隔柱 SPACER SUPPORT					3E
			PART NO:				LCAS-10	SHEET 1 OF 1

表單號碼 QF135