

10W, AC-DC converter



## FEATURES

- Ultra-wide 85 - 305VAC and 100 - 430VDC input voltage range
- Operating ambient temperature range: -40°C to +85°C
- Up to 85% efficiency
- No-load power consumption < 0.1W
- 5000m altitude application
- EMI performance meets CISPR32/EN55032 CLASS B, EN55014
- IEC/EN/UL62368/EN60335/EN61558 safety approval
- Design to meet IEC/EN60601-1/ANSI/AAMI ES60601-1 standards (2xMOPP)

LD10-23BxxR2-M series AC-DC converters is one of Mornsun's new generation compact size power converter. It features ultra-wide AC input and at the same time accepts DC input voltage, low power consumption, low ripple & noise, high efficiency, high reliability, reinforced isolation. It offers good EMC performance compliant to IEC/EN61000-4 and CISPR32/EN55032 and meets IEC/EN/UL62368/EN60335/EN61558/IEC/EN60601-1/ANSI/AAMI ES60601-1 standards. The converters are widely used in industrial, power, medical treatment, home appliances, instrumentation, communication and civil applications. For extremely harsh EMC environment, we recommend using the application circuit show in Design Reference of this datasheet.

## Selection Guide

Certification	Part No.	Output Power	Peak Power	Nominal Output Voltage and Current (Vo/Io)	Peak Current	Efficiency at 230VAC (%) Typ.	Capacitive Load (μF) Max.
UL/CE/CB	LD10-23B03R2-M	10W	13.2W	3.3V/3000mA	4000mA	82	6600
	LD10-23B05R2-M			5V/2000mA	3000mA	85	5000
	LD10-23B09R2-M			9V/1100mA	1670mA	84	3000
	LD10-23B12R2-M			12V/830mA	1250mA	85	2000
	LD10-23B15R2-M			15V/660mA	1000mA	85	1500
	LD10-23B24R2-M			24V/410mA	625mA	86	680

## Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC input	85	--	305	VAC
	DC input	100	--	430	VDC
Input Frequency		47	--	63	Hz
Input Current	115VAC	--	--	0.45	A
	230VAC	--	--	0.3	
Inrush Current	230VAC	--	60	--	
Leakage Current	277VAC/50Hz	0.1mA RMS Max.			
Built In Fuse		2A/300V, slow-blow			
Hot Plug		Unavailable			

## Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Output Voltage Accuracy		--	±2	--	%	
Line Regulation	Full load	--	±0.5	--		
Load Regulation	0%-100% load	--	±1	--		
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	--	70	120	mV	
Stand-by Power Consumption	230VAC	3.3/5/9/12/15V	--	--	0.10	W
		24V	--	--	0.12	
Temperature Coefficient		--	±0.02	--	%/°C	
Short Circuit Protection		Hiccup, continuous, self-recovery				
Over-current Protection		≥110%Io, self-recovery				

Over-voltage Protection	3.3/5V	≤7.5VDC (Output voltage clamp or hiccup )			
	9 V	≤15VDC (Output voltage clamp or hiccup )			
	12/15V	≤20VDC (Output voltage clamp or hiccup )			
	24V	≤30VDC (Output voltage clamp or hiccup )			
Minimum Load		0	--	--	%
Hold-up Time	115VAC	--	10	--	ms
	230VAC	--	55	--	

Note: \*The "Tip and barrel method" is used for ripple and noise test, output parallel 10uF electrolytic capacitor and 1uF ceramic capacitor, please refer to AC-DC Converter Application Notes for specific information.

### General Specifications

Item		Operating Conditions	Min.	Typ.	Max.	Unit		
Isolation	Input-Output	Electric Strength Test for 1min., leakage current <5mA	4000	--	--	VAC		
Insulation Resistance	Input - output	At 500VDC	100	--	--	MΩ		
Operating Temperature			-40	--	+85	°C		
Storage Temperature			-40	--	+85			
Storage Humidity			--	--	95	%RH		
Soldering Temperature		Wave-soldering	260 ± 5°C; time: 5 - 10s					
		Manual-welding	360 ± 10°C; time: 3 - 5s					
Switching Frequency			--	65	--	kHz		
Power Derating		+50°C to +70°C	3.3/5V	3.00	--	--	% / °C	
		+55°C to +70°C	9/12/15/24V	2.67	--	--		
		+70°C to +85°C		0.66	--	--		
		85VAC - 100VAC			1.33	--	--	% / VAC
		277VAC - 305VAC			0.71	--	--	
		2000 - 5000m			0.67	--	--	% / Km
Safety Standard			IEC/EN/UL62368/EN60335/EN61558/ IEC/EN60601-1/ANSI/AAMI ES60601-1					
Safety Certification			IEC/EN/UL62368/EN60335/EN61558					
Safety Class			CLASS II					
MTBF			MIL-HDBK-217F@25°C > 3200,000 h					
Designed Life		230VAC	Ta: 25°C 100% load	> 130x10 <sup>3</sup> h				
			Ta: 55°C 100% load	> 27x10 <sup>3</sup> h				




### Mechanical Specifications

Case Material	Black plastic, flame-retardant and heat-resistant (UL94V-0)
Dimension	47.60 x 26.80 x 23.50 mm
Weight	48g (Typ.)
Cooling method	Free air convection



Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032 CLASS B	
		CISPR11/EN55011 CLASS B	
		EN55014-1	
Emissions	RE	CISPR32/EN55032 CLASS B	
		CISPR11/EN55011 CLASS B	
		EN55014-1	
Immunity	ESD	IEC/EN 61000-4-2 Contact $\pm 8KV$	Perf. Criteria B
		IEC/EN55014-2	Perf. Criteria B
	RS	IEC/EN61000-4-3 10V/m	perf. Criteria A
		IEC/EN55014-2	perf. Criteria A
	EFT	IEC/EN61000-4-4 $\pm 2KV$	perf. Criteria B
		IEC/EN61000-4-4 $\pm 4KV$ (See Fig.2 for recommended circuit)	perf. Criteria B
		IEC/EN55014-2	perf. Criteria B
	Surge	IEC/EN61000-4-5 line to line $\pm 1KV$	perf. Criteria B
		IEC/EN61000-4-5 line to line $\pm 2KV$ (See Fig.2 for recommended circuit)	perf. Criteria B
		IEC/EN55014-2	perf. Criteria B
CS	IEC/EN61000-4-6 10Vr.m.s	perf. Criteria A	
	IEC/EN55014-2	perf. Criteria A	
Voltage dip, short interruption and voltage variation	IEC/EN61000-4-11 0%, 70%	perf. Criteria B	
	IEC/EN55014-2	perf. Criteria B	

Product Characteristic Curve

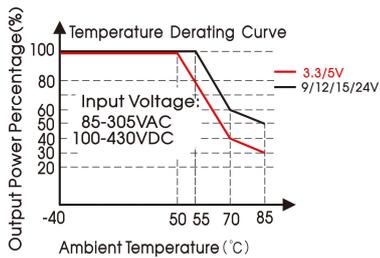

- Note: ① The product takes peak power (15W) as the starting point for derating.  
 ② With an AC input between 85-100V/277-305VAC and a DC input between 100-120V/390-430VDC, the output power must be derated as per temperature derating curves;  
 ③ This product is suitable for applications using natural air cooling; for applications in closed environment please consult factory or one of our FAE.

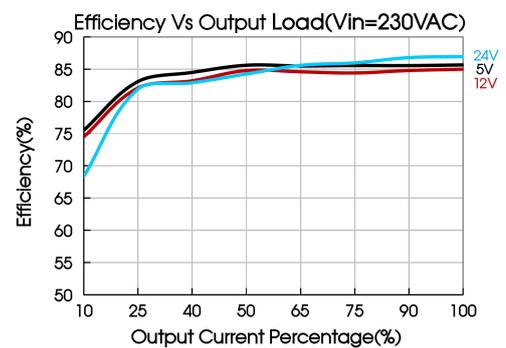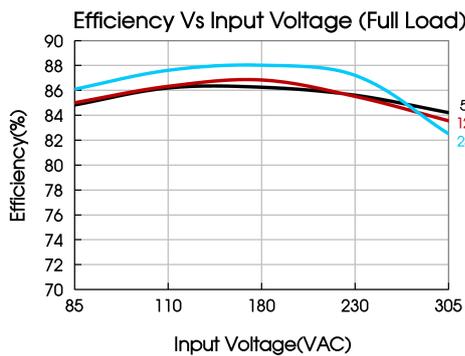

Design Reference

1. Typical application

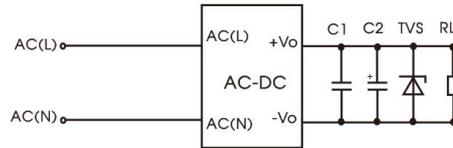


Fig. 1: Typical circuit diagram

Part No.	C1	C2	TVS
LD10-23B03R2-M	1μF/50V	220μF/16V	SMBJ7.0A
LD10-23B05R2-M		220μF/16V	SMBJ7.0A
LD10-23B09R2-M		100μF/25V	SMBJ12A
LD10-23B12R2-M		100μF/25V	SMBJ20A
LD10-23B15R2-M		100μF/25V	SMBJ20A
LD10-23B24R2-M		100μF/35V	SMBJ30A

Output Filter Components:

We recommend using an electrolytic capacitor with high frequency, and low ESR rating for C2 (refer to manufacture’s datasheet). Choose a capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C1 is a ceramic capacitor used for filtering high-frequency noise and TVS is a recommended suppressor diode to protect the application in case of a converter failure.

2. EMC compliance recommended circuit

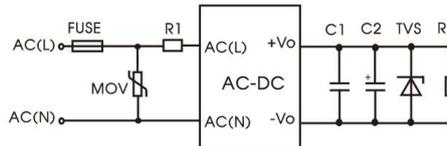



Fig 2: EMC application circuit with higher requirements

Component	Recommended value
FUSE	3.15A/300V, slow-blow, required
MOV	S14K350
R1	6.8 Ω /3W

3. For additional information please refer to application notes on [www.mornsun-power.com](http://www.mornsun-power.com).

Dimensions and Recommended Layout

THIRD ANGLE PROJECTION

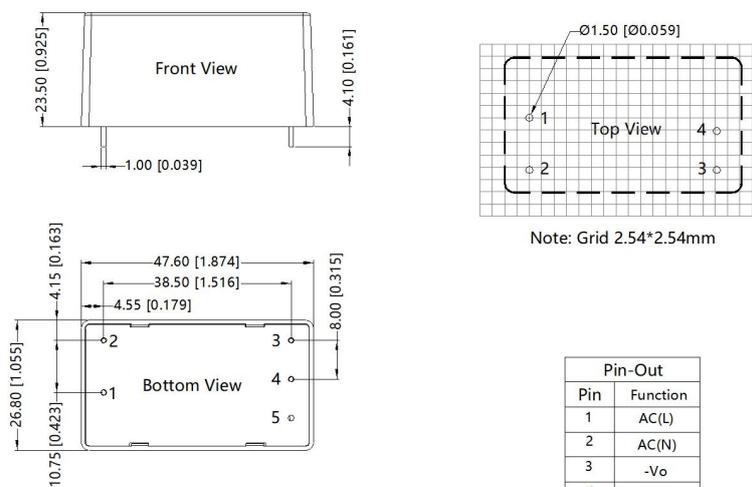

Note:  
Unit: mm[inch]  
Pin diameter tolerances: ±0.10[±0.004]  
General tolerances: ±0.50[±0.020]

Pin	Function
1	AC(L)
2	AC(N)
3	-Vo
4	+Vo
5	No Pin

Note:

1. For additional information on Product Packaging please refer to [www.mornsun-power.com](http://www.mornsun-power.com). Packaging bag number: 58220011;
2. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
3. Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a=25^{\circ}\text{C}$ , humidity<75% with nominal input voltage and rated output load;
4. All index testing methods in this datasheet are based on our company corporate standards;
5. We can provide product customization service, please contact our technicians directly for specific information;
6. Products are related to laws and regulations: see "Features" and "EMC";
7. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

## Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China  
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com