



## FEATURES

- Universal 90 - 264VAC or 120 - 370VDC Input voltage
- Operating ambient temperature range: -30℃ to +70℃
- High efficiency, high reliability and long life
- LED indicator for power on
- Output short circuit, over-current, over-voltage protection
- High I/O isolation test voltage up to 3000VAC
- EN62368 safety approved, safety according to IEC/UL62368, EN60335, GB4943
- Emissions compliant to CISPR32/EN55032 CLASS B
- Withstand 5G vibration test
- Operating altitude up to 5000m

LM100-10Dxx series of power converter design features two isolated output versions, which can independently supply two different loads in the system that need to be isolated from each other. The products can be used in harsh working environments with an ambient temperature range from -30℃ to +70℃, without the need of a fan for further heat dissipation. In addition, the converters EMC immunity performance meets the requirements of IEC61000 standard and meet emission standard CISPR32/EN55032, class B without any external components, thus providing excellent EMC protection. The products also meet IEC/EN/UL62368, EN60335, GB4943 safety standards. The converters integrate a variety of protection features and offer a high-performance to low-cost ratio providing the best power solution for a variety of industries such as industrial control equipment, instrumentation and smart home and building equipment application.

## Selection Guide

Certification	Part No.*	Output Power	Rated Output Voltage and Current (Vo/Io)		Working Current Range*		Efficiency at 230VAC (%) Typ.	Max. Capacitive Load (μF)	
			Vo1/Io1	Vo2/Io2	Io1	Io2		Vo1	Vo2
CE	LM100-10D0524-30	97W	+5V/5.0A	+24V/3.0A	0.5-7.0A	0.3-3.5A	85	5000	3000
	LM100-10D1224-20	96W	+12V/4.0A	+24V/2.0A	0.4-6.0A	0.2-3.0A	87	4000	2000

Note: 1.\*Working current range: If any one of the 2 outputs arrive at the maximum current, the other output with 50% rated load, the total output power cannot exceed the rated power and working time < 3s, the output voltage accuracy of vo2 is ±8.0%;  
2.\*Use suffix "Q" for conformal coating.

## Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Voltage Range	AC Input		90	--	264	VAC
	DC Input		120	--	370	VDC
Input Frequency			47	--	63	Hz
Input Current	115VAC		--	--	2.5	A
	230VAC		--	--	1.5	
Inrush Current	115VAC	Cold start	--	30	--	
	230VAC		--	50	--	
Leakage Current	240VAC		<2.0mA			
Hot Plug			Unavailable			

## Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Full load range	Vo1	--	±2	--	%
		Vo2	LM100-10D0524-30	±5.0	--	
				±5.0	--	
Line Regulation	Full load	Vo1	--	±0.5	--	
		Vo2	LM100-10D0524-30	±2.0	--	
				±1.0	--	
Load Regulation	10% - 100% load (Balanced load)	Vo1	--	±2.0	--	%
		Vo2	LM100-10D0524-30	±5.0	--	
				±5.0	--	





# AC/DC 100W Enclosed Switching Power Supply

## LM100-10Dxx, LM100-10Dxx-Q Series

**MORNSUN®**

Ripple & Noise*	20MHz bandwidth (peak-peak value)	Vo1		--	80	--	mV
		Vo2	LM100-10D0524-30	--	200	--	
			LM100-10D1224-20	--	150	--	
Temperature Coefficient	Vo1			--	±0.03	--	%/℃
Voltage Adjustable Range (Vo1)*	Rated input voltage		LM100-10D0524-30	4.75	--	5.50	VDC
			LM100-10D1224-20	11.4	--	13.2	
Switching Delay Time	Rated input voltage			--	--	2.0	s
Hold-up Time	115VAC			5	--	--	ms
	230VAC			30	--	--	
Min. Load				Refer to the working current range			
Short Circuit Protection	Recovery time <5s after the short circuit disappear			Hiccup, continuous, self-recovery			
Over-current Protection	Dual output with balanced load			≥110%Io, self-recovery			
Over-voltage Protection (Vo1)	LM100-10D0524-30			5.75VDC≤Vo1≤6.75VDC (Output shut down)			
	LM100-10D1224-20			13.8VDC≤Vo1≤15.8VDC (Output shut down)			
Note: 1.*The “Tip and barrel method” is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information; 2.*When Vo1 working in the adjustable range, the output power please refer to power derating curve and should not be exceed the rated output power.							

## General Specifications

Item		Operating Conditions		Min.	Typ.	Max.	Unit
Isolation Voltage	Input - output	Electric Strength Test for 1min., leakage current <10mA		3000	--	--	VAC
	Input - 			2000	--	--	
	Output - 			500	--	--	
	Vo1 - Vo2			500	--	--	VDC
Insulation Resistance	Input - output	At 500VDC		100	--	--	M Ω
	Input - 			100	--	--	
	Output - 			100	--	--	
Operating Temperature		Refer to derating curve		-30	--	+70	℃
Storage Temperature				-40	--	+85	
Storage Humidity		Non-condensing		--	--	95	%RH
Power Derating	Input voltage derating		90VAC -115VAC	0.8	--	--	% /VAC
			115VAC - 264VAC	0	--	--	
			120VDC -160VDC	0.5	--	--	% /VDC
			160VDC - 370VDC	0	--	--	
	Operating temperature derating		-30℃ to +40℃	0	--	--	% /℃
			+40℃ to +70℃	2.0	--	--	
Safety Standard		Meet IEC/EN/UL62368/EN60335/GB4943					
Safety Certification		EN62368					
Safety Class		CLASS I					
MTBF		MIL-HDBK-217F@25℃		>300,000 h			

## Physical Specifications

Case Material	Metal (AL1100, SGCC)
Dimension	159.00 x 97.00 x 30.00 mm
Weight	415g (Typ.)
Cooling Method	Free air convection

**MORNSUN®**

MORNSUN Guangzhou Science & Technology Co., Ltd.

2021.04.26-A/5



Page 2 of 4

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

### EMC Specifications

Emissions	CE	CISPR32/EN55032	CLASS B	
	RE	CISPR32/EN55032	CLASS B	
	Harmonic current	IEC/EN61000-3-2	CLASS A	
Immunity	ESD	IEC/EN61000-4-2	Contact $\pm 6\text{KV}$ /Air $\pm 8\text{KV}$	perf. Criteria A
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	$\pm 2\text{KV}$	perf. Criteria A
	Surge	IEC/EN 61000-4-5	line to line $\pm 2\text{KV}$ /line to ground $\pm 4\text{KV}$	perf. Criteria A
	CS	IEC/EN61000-4-6	10 Vr.m.s	perf. Criteria A
	Voltage dips, short interruptions and voltage variations	IEC/EN61000-4-11	0%, 70%	perf. Criteria B


### Product Characteristic Curve

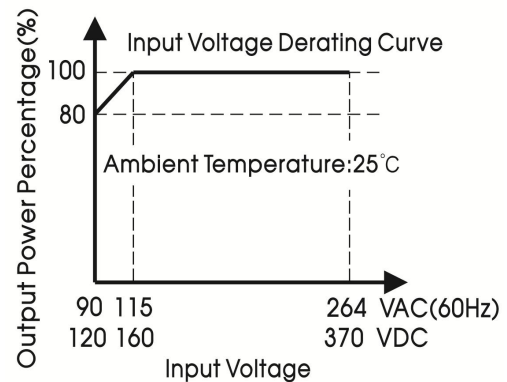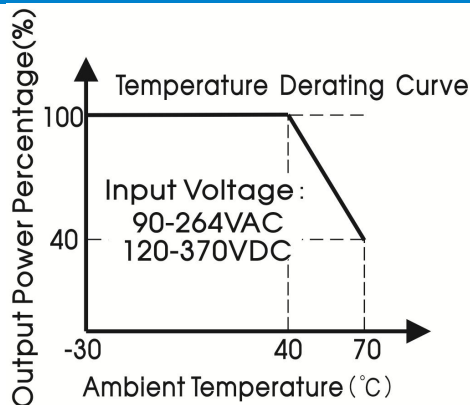


Note: 1. With an AC input voltage between 90-115VAC and a DC input between 120-160VDC the output power must be derated as per the temperature derating curves;

2. This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.



Efficiency Vs Output Load ( $V_{in}=230\text{VAC}$ )

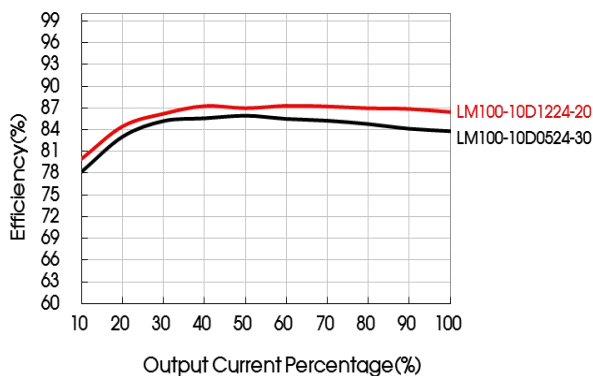

Efficiency Vs Input Voltage (Full Load)

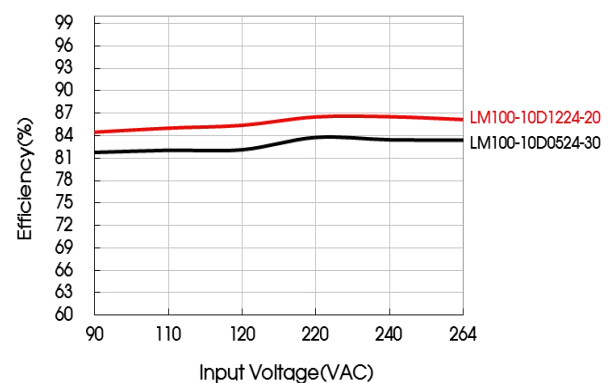

### Dimensions and Recommended Layout

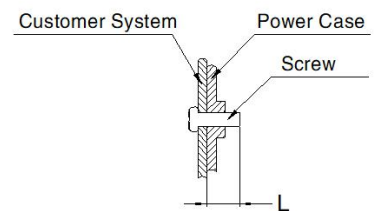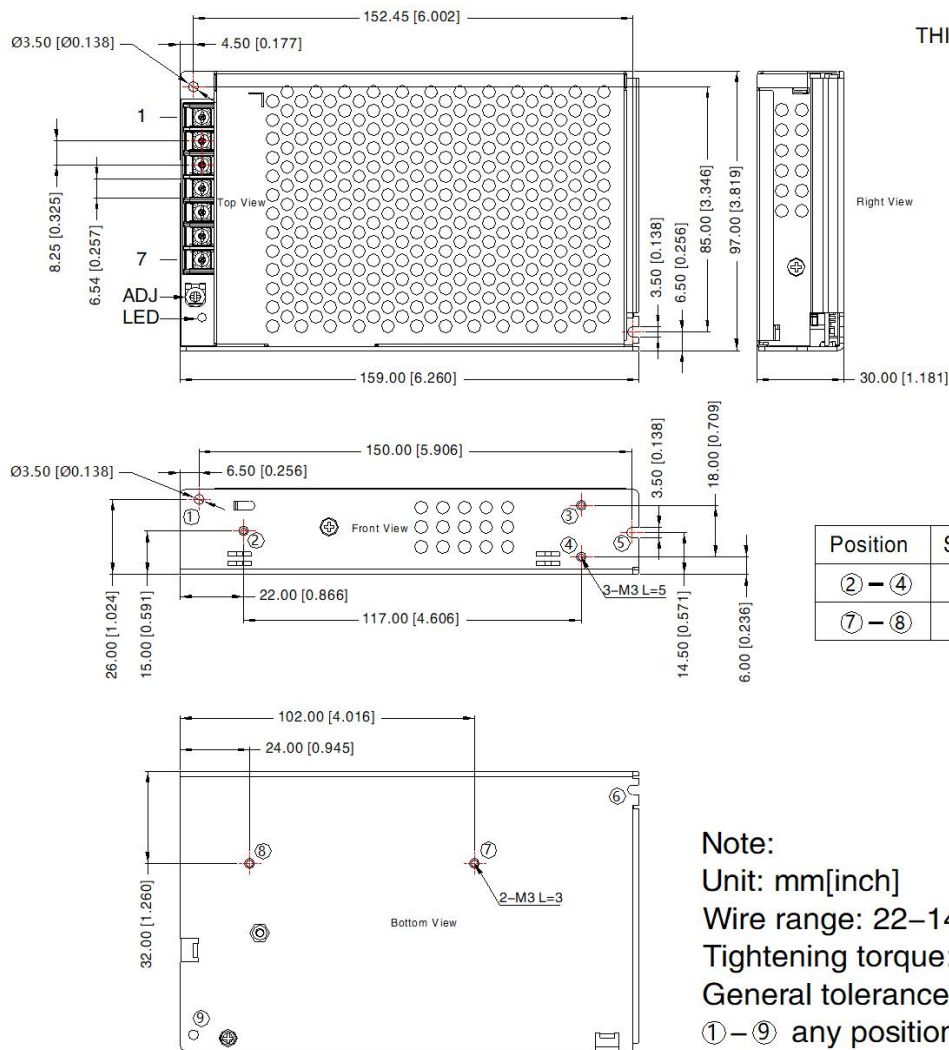

#### Note:

- For additional information on Product Packaging please refer to [www.mornsun-power.com](http://www.mornsun-power.com). Packaging bag number: 58220064;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a=25^{\circ}\text{C}$ , humidity<75%RH with nominal input voltage and rated output load;
- The ambient temperature derating of  $5^{\circ}\text{C}/1000\text{m}$  is needed for operating altitude greater than 2000m;
- All index testing methods in this datasheet are based on our company corporate standards;
- In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- The out case needs to be connected to PE ( $\text{---}$ ) of system when the terminal equipment in operating;
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;
- The power supply is considered a component which will be installed into a final equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.

### MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China  
Ttel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn [www.mornsun-power](http://www.mornsun-power)