

H

G

F

E

D

C

B

A

H

G

F

E


D

C

B


A

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

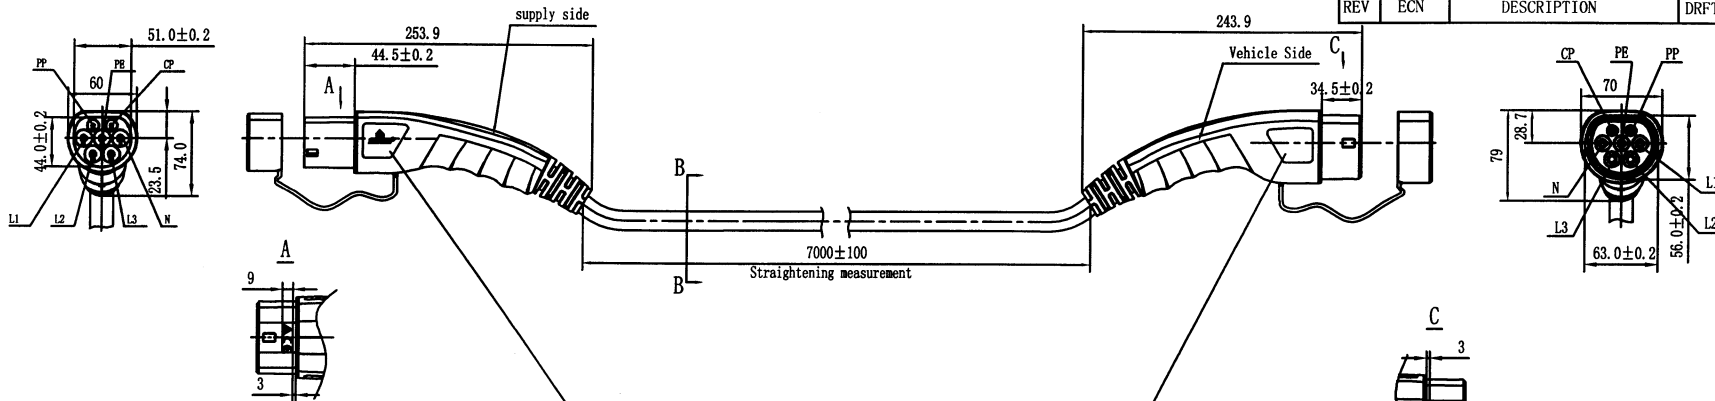

Wiring diagram

POWER SUPPLY ELECTRIC VEHICLE

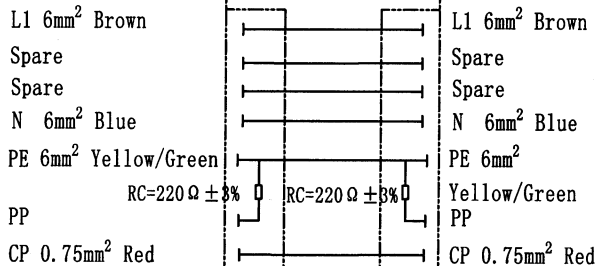

Laser Printing Front Note:

DEGSON®

Laser Printing Back Note(Arial):


MEAC-S-032A-P1-03-7.0M-30AH
32A 250V AC
IEC 62196-2:2016
IP54
20xxxxxx-xxxx

Laser Printing Front Note(Arial):

MEAC-S-032A-V1-03-7.0M-30AH
32A 250V AC
IEC 62196-2:2016
IP54
20xxxxxx-xxxx

Laser Printing Back Note:

DEGSON®

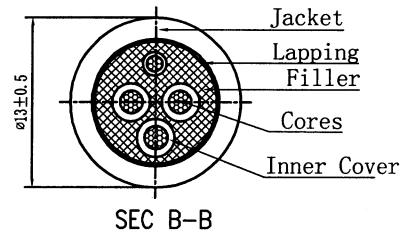

NOTES:

1. Cable: EN50620-2017 3*6mm²+1*0.75mm² Black
2. RoHS Compliance

Technical parameters

Rated voltage	250V AC
Rated current	32A
Temperature range	-30℃~+50℃
Insulate resistance	>5MΩ, 500V DC 1Min
Withstanding voltage	L、N AND PE , 2500V AC 1Min
	L AND N, 2500V AC 1Min
Ingress protection	IP54
The insertion/pullout times	10000 TIMES
Insertion/pullout force	<100N
Reference standard	IEC 62196-2:2016

Customer Drawing

Size Measure Range	.XX	.X
≤6	±0.05	±0.10
6~30	±0.10	±0.20
30~120	±0.15	±0.30
120~400	±0.20	±0.50
400~1000	±0.30	±0.80
1000~2000	±0.50	±1.20
Angle Measure Range	.XX	.X
	±0.5°	±1.0°

PART NO.:	NINGBO DEGSON ELECTRICAL CO., LTD		
APPD:	NAME: EV ELECTRIC VEHICLE AND EV POWER SUPPLY (32A single-phase) MEAC-S-032A-V1P1-03-7.0M-30A(H)		
CHKD:	TITLE: Customer Drawing		
DRFT: LLL 2020-08-18	REV	DO-1	
THIRD ANGLE PROJECTION	DRAWING NO.:	SHEET 1/1	
	MM (INCH)	DO NOT SCALE DRAWING	
	SCALE	1:6	