


Wiring diagram




POWER SUPPLY ELECTRIC VEHICLE

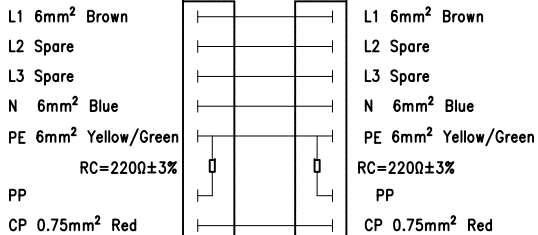

X1 Laser Printing Front Note:  
 Laser Printing Back Note(Arial):  
 MEAC-S-032A-P1-03-5.0M-30AH  
 32A 250V AC  
 IEC 62196-2:2016  
 IP54  
 20xxxxxx-xxxx

X2 Laser Printing Front Note(Arial):  
 MEAC-S-032A-V1-03-5.0M-30AH  
 32A 250V AC  
 IEC 62196-2:2016  
 IP54  
 20xxxxxx-xxxx  
 Laser Printing Back Note:

未注公差/General tolerances(mm)											D 0.1/10 ±2'		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250		>315	>400
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

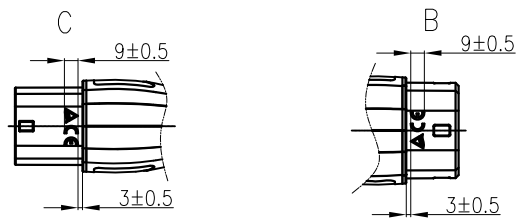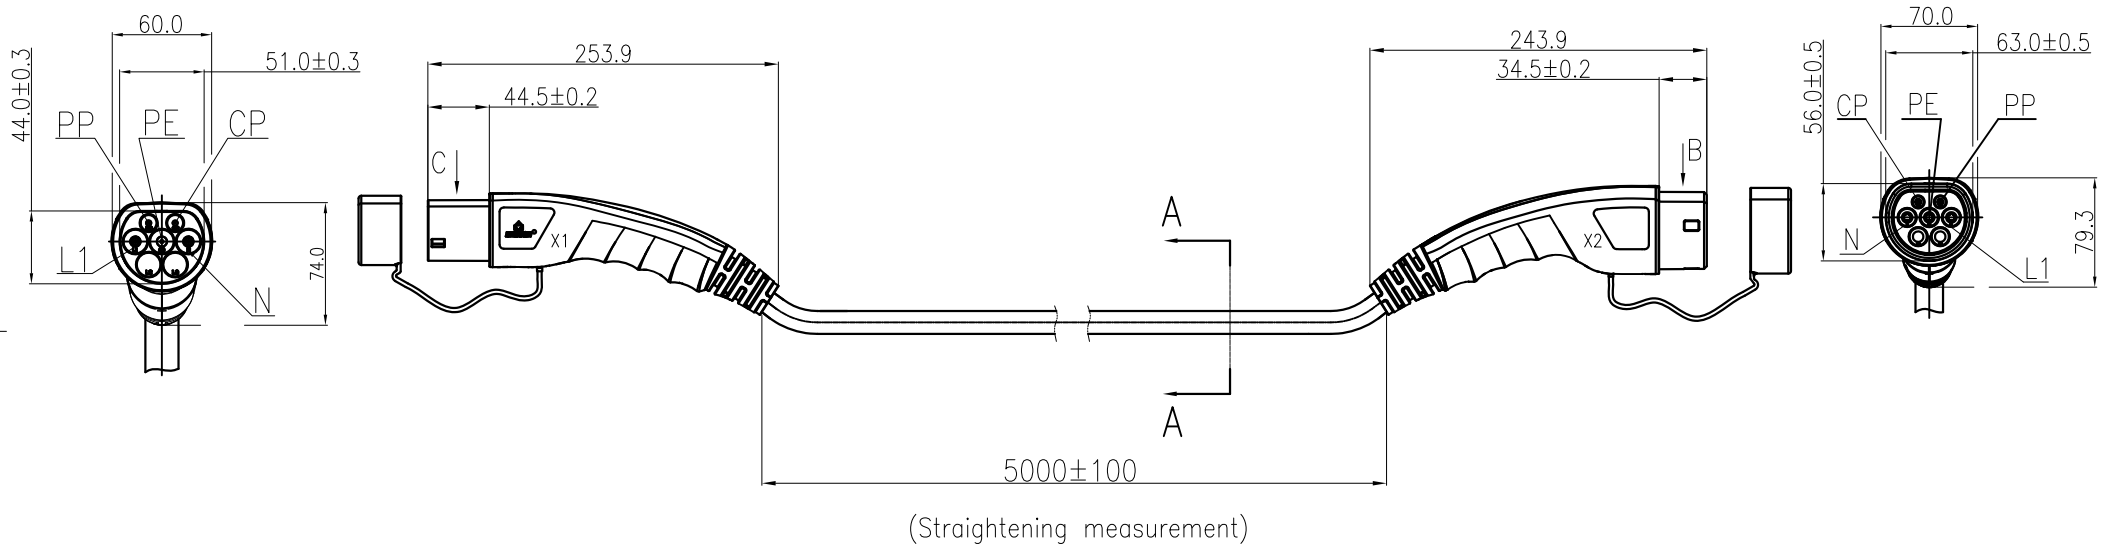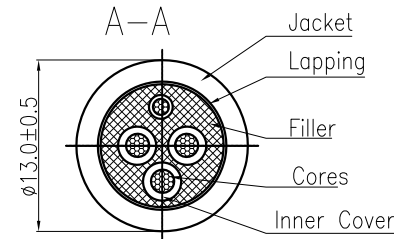

额定电压电流/Rated Voltage/Current	250V AC/32A
绝缘电阻/Insulate Resistance	>100MΩ,500V DC 1min
耐压/Withstanding Voltage	L, N and PE ,2500V AC 1min L and N ,2500V AC 1min
防护等级/Ingress Protection	IP54
插拔寿命/Insertion/Pullout Times	10,000 Times
插拔力/Insertion/Pullout Force	<100N
使用温度范围/Operating temperature(°C)	-30~+50
线材规格/Cable specification	3*6mm²+1*0.75mm² Black
标准/Reference standard	IEC 62196-2:2016
符合RoHS环保要求/Conform to RoHS	Yes

		MATERIAL:				SURFACE/COLOR:			
		MAT NO/REV:	DO-1			MAT STATUS:			
APPD:	ZX	2020.1.16	NAME MEAC-S-032A-V1P1-03-5.0M-30A(H)						
CHKD:	DT	2020.1.16							
DRFT:	Luo XF	2020.1.16							
REV	ECN	DESCRIPTION	DRFT	DATE	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
						CUSTOMER DRAWING		1:3	1/1

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless express authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design's registrations. 未经授权复制或传播本文件内容，一经发现，立即制止，侵权必究。 未经授权复制或传播本文件内容，一经发现，立即制止，侵权必究。