

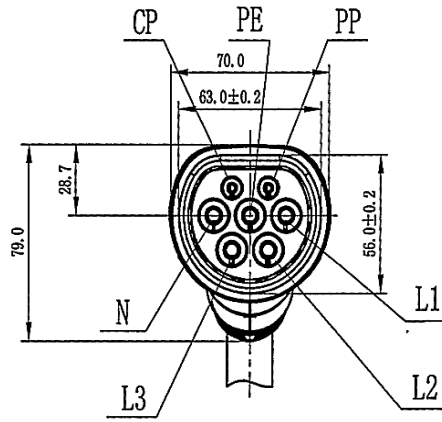
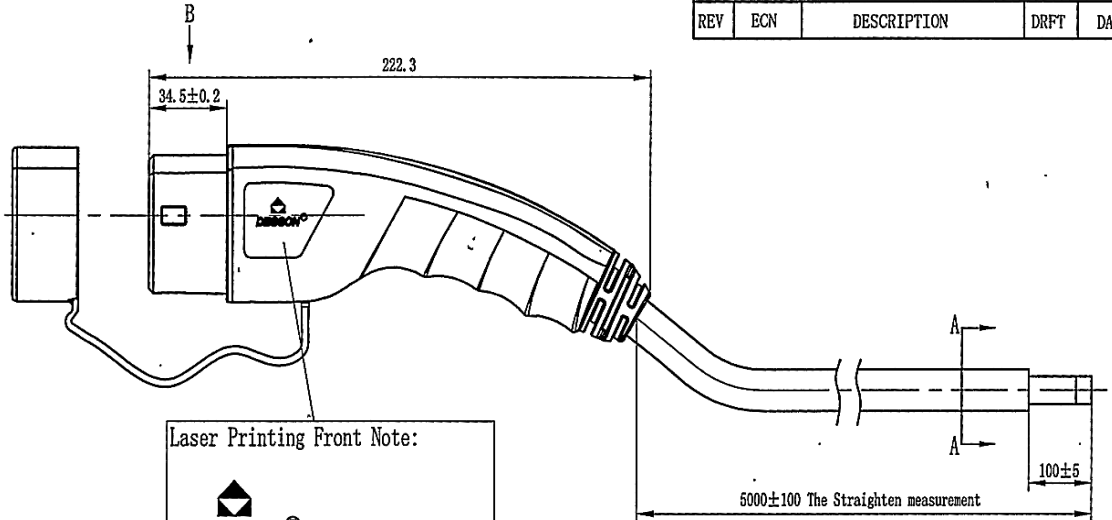


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE




Wiring diagram

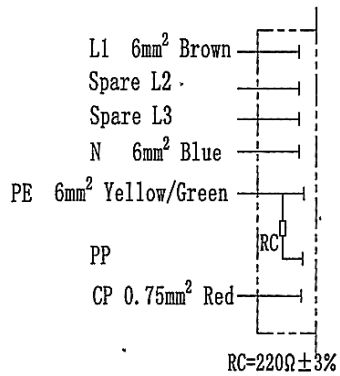

Laser Printing Front Note:

 Laser Printing Back Note(Arial) :
 MEAC-S-032A-V-03-5.0M-10AH
 32A 250V AC
 IEC 62196-2:2016
 IP54
 201xxxxx-xxxx

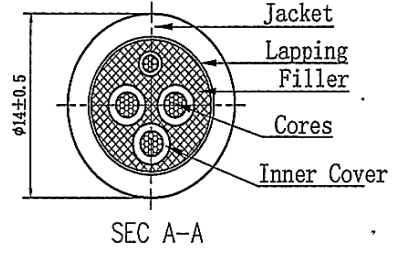

Technical parameters	
Rated voltage	250V AC
Rated current	32A
Temperature range	-30°C~+50°C
Insulate resistance	>5MΩ, 500V DC
Withstanding voltage	L, N AND PE >2500V AC
	L AND N >2500V AC
Ingress protection	IP54
The insertion/pullout times	10000 TIMES
Insertion/pullout force	<100N
Reference standard	IEC 62196-2:2016

Customer Drawing

NOTES:
 1. Cable: EN50620-2017 EV 3*6mm²+1*0.75mm² Black
 2. RoHS Compliance

Size Measure Range ≤6 6~30 30~120 120~400 400~1000 1000~2000 Angle Measure Range .XX ±0.5°	.XX	.X	PART NO. :/ APPD: ZX 20190529 CKD: Lp02/10/07 DRFT: XF LUO 2019-05-29 THIRD ANGLE PROJECTION 	宁波高松电子有限公司 DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD NAME: Vehicle Connector (32A AC single phase) MEAC-S-032A-V-03-5.0M-10AH TITLE: Customer Drawing DRAWING NO.: MEAC-S-032A-C01 DO NOT SCALE DRAWING	REV	T0-1
	±0.05	±0.10			SHEET	1/1
	±0.10	±0.20			SCALE	1:3
	±0.15	±0.30				
	±0.20	±0.50				