



REVISION RECORD

| REV | ECN | DESCRIPTION | DRFT | DATE |
|-----|-----|-------------|------|------|
| | | | | |

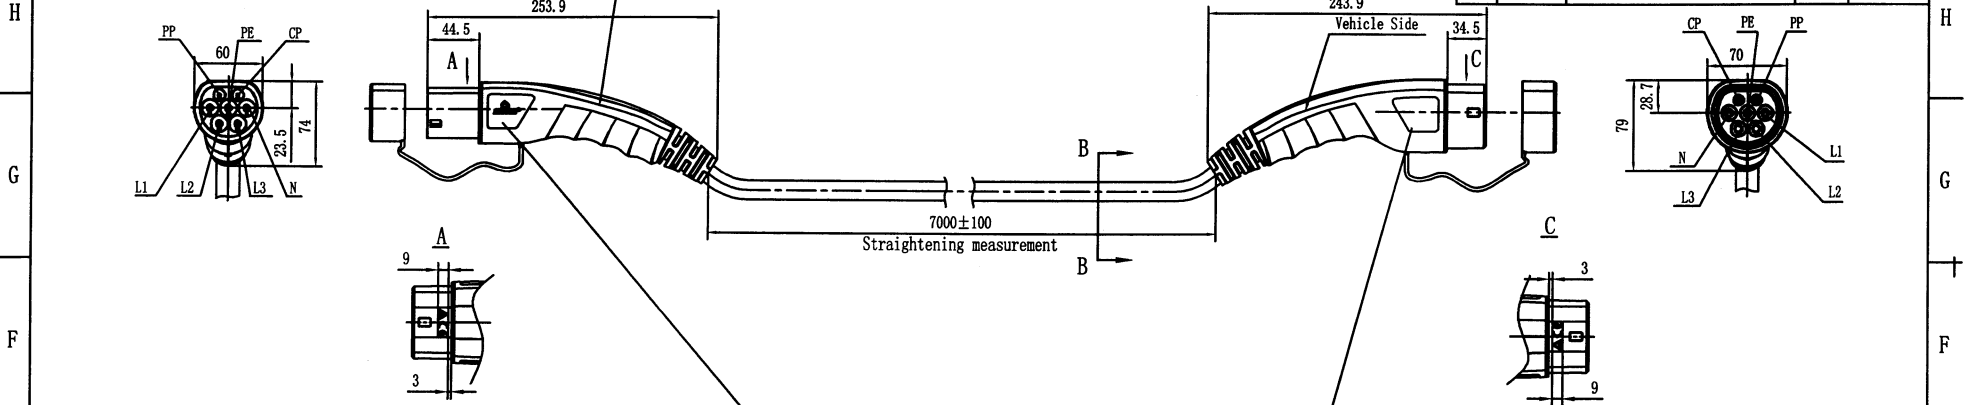

Wiring diagram

POWER SUPPLY ELECTRIC VEHICLE

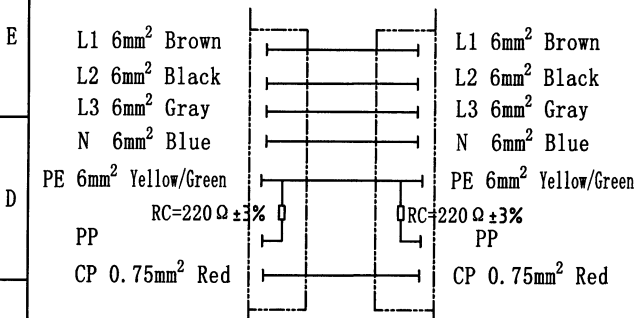

Laser Printing Front Note:

DEGSON®

Laser Printing Back Note(Arial):


MEAC-T-032A-P1-03-7.0M-30AH
 32A 440V AC
 IEC 62196-2:2016
 IP54
 20xxxxxx-xxxx

Laser Printing Front Note(Arial):

MEAC-T-032A-V1-03-7.0M-30AH
 32A 440V AC
 IEC 62196-2:2016
 IP54
 20xxxxxx-xxxx

Laser Printing Back Note:

DEGSON®

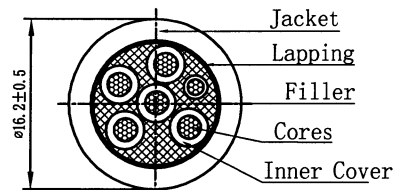

| Technical parameters | |
|-----------------------------|----------------------------|
| Rated voltage | 440V AC |
| Rated current | 32A |
| Temperature range | -30℃~+50℃ |
| Insulate resistance | >5MΩ, 500V DC 1Min |
| Withstand voltage | L, N AND PE, 2500V AC 1Min |
| | L AND N, 2500V AC 1Min |
| Ingress protection | IP54 |
| The insertion/pullout times | 10000 TIMES |
| Insertion/pullout force | <100N |
| Standard | IEC 62196-2:2016 |

Customer Drawing

- NOTES:
- Cable: EN50620-2017 EV 5*6mm²+1*0.75mm² Black
 - RoHS Compliance

| Size Measure Range | .XX | X |
|---------------------|-------|-------|
| ≤6 | ±0.05 | ±0.10 |
| 6~30 | ±0.10 | ±0.20 |
| 30~120 | ±0.15 | ±0.30 |
| 120~400 | ±0.20 | ±0.50 |
| 400~1000 | ±0.30 | ±0.80 |
| 1000~2000 | ±0.50 | ±1.20 |
| Angle Measure Range | .XX | .X |
| | ±0.5° | ±1.0° |

| | | |
|--------------------|--|-------------------------|
| PART NO.: / | DEGSON® 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD | |
| | NAME: EV ELECTRIC VEHICLE AND EV POWER SUPPLY (32A three-phase) MEAC-T-032A-V1P1-03-7.0M-30A(H) | |
| APPD: ZX 20200818 | DRFT: LLL 2020-08-18 | TITLE: Customer Drawing |
| CHKD: DT 2020.8.18 | | REV DO-1 |
| | | SHEET 1/1 |
| | THIRD ANGLE PROJECTION | SCALE 1:6 |
| | | DO NOT SCALE DRAWING |