




Dimensions in mm

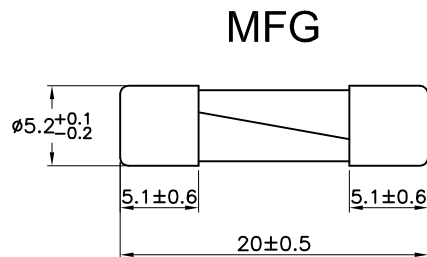


MFG-PA

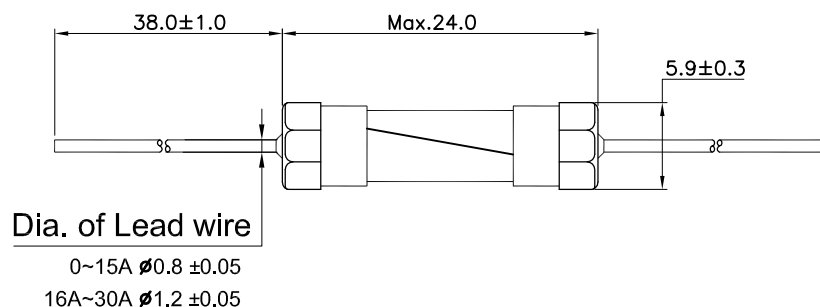

MFG-P

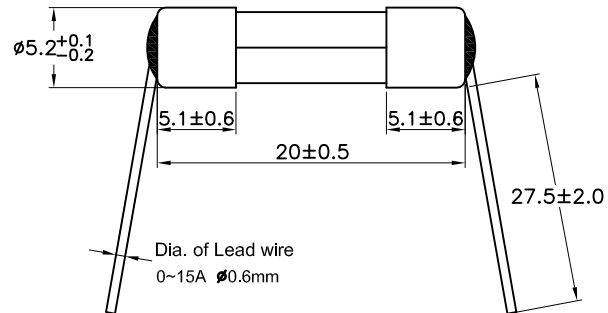

MFG-PR

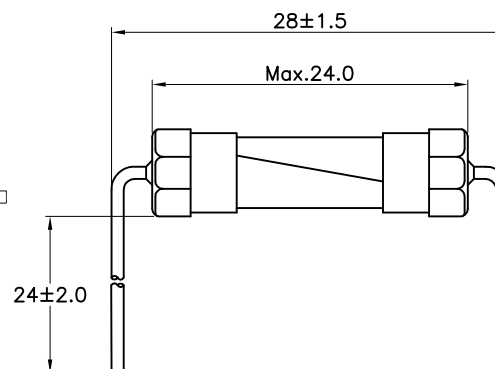

Rated Current	Breaking capacity	Rated Voltage	MFG52/-P-PA-PR		
			UL	SP	JET
100mA	@125V/AC 10KA @250V/AC 35A	125V/250V	○	○	
125mA		125V/250V	○	○	
160mA		125V/250V	○	○	
200mA		125V/250V	○	○	
250mA		125V/250V	○	○	
300mA		125V/250V	○	○	
315mA		125V/250V	○	○	
400mA		125V/250V	○	○	
500mA		125V/250V	○	○	
600mA		125V/250V	○	○	
630mA		125V/250V	○	○	
700mA		125V/250V	○	○	
800mA		125V/250V	○	○	
1A		125V/250V	○	○	○
1.25A	@125V/AC 10KA @250V/AC 100A	125V/250V	○	○	○
1.5A		125V/250V	○	○	○
1.6A		125V/250V	○	○	○
2A		125V/250V	○	○	○
2.5A		125V/250V	○	○	○
3A		125V/250V	○	○	○
3.15A		125V/250V	○	○	○
3.5A		125V/250V	○	○	○
4A	@125V/AC 10KA @250V/AC 200A	125V/250V	○	○	○
5A		125V/250V	○	○	○
6A		125V/250V	○	○	○
6.3A		125V/250V	○	○	○
7A		125V/250V	○	○	○
8A		125V/250V	○	○	○
* 10A		125V/250V	○	○	○
12A	@32V/AC 1000A	32V			
13A		32V			
15A		32V			
16A		32V			
20A		32V			
25A		32V			
30A		32V			

* PS:10A Approvals only 125V


Test Specification according to Standard UL 248-1,14

Electrical Characteristic

Rated Current	1.0 I _n	1.35 I _n	2 I _n
I _n	Min.	Max.	Max.
100mA-30A	4 h	3600 S	120 S



UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN mm
TOLERANCE
DECIMALS ANGULAR
X ± 0.5 ± 2°
XX ± 0.25
DO NOT SCALE DRAWING



P/N	
REV	C

CUSTOMER NO.	
DRAWN BY	Allan
CHECKED BY	
APPROVED BY	鄭文和
DATE	2011.11.29
SCALE	

	JENN FENG ELECTRIC INDUSTRIAL CO., LTD.
TITLE	5.2X20mm Miniature Cartridge Fuse
PART NO.	MFG MFG-P/PA/PR
DRAWING NO.	AA10081701