



REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

H  
G  
F  
E  
D  
C  
B  
A

H  
G  
F  
E  
D  
C  
B  
A

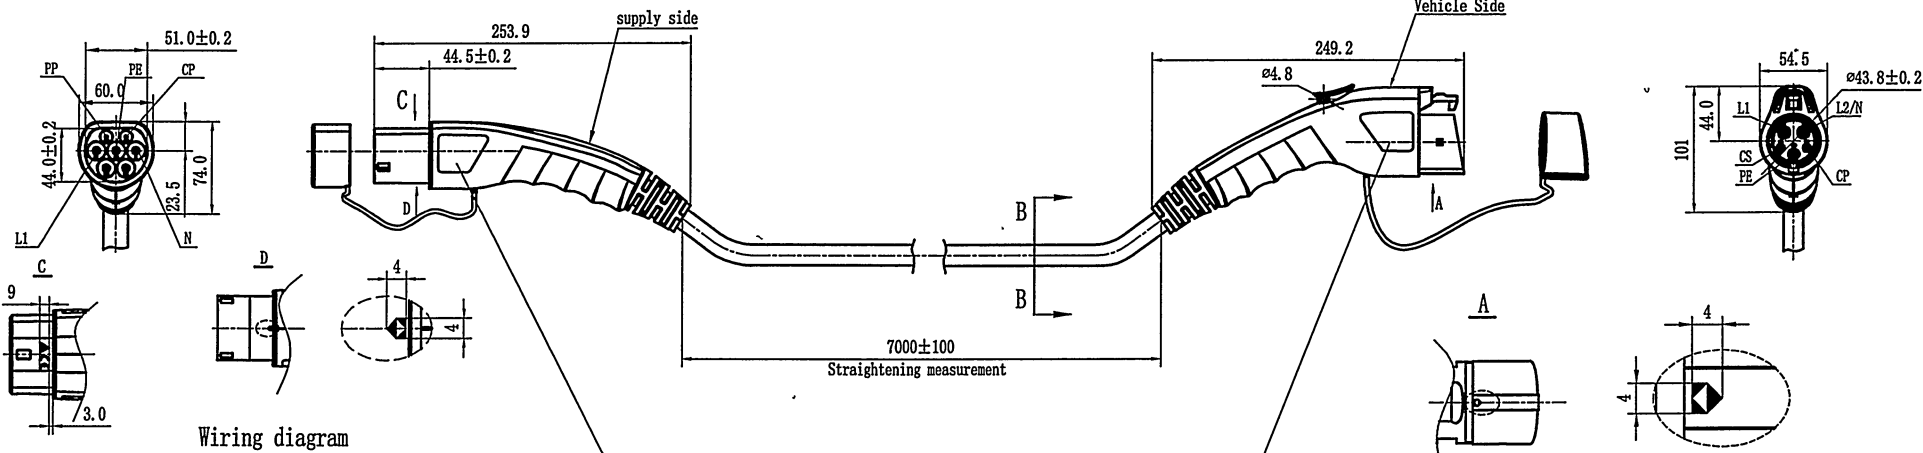

Wiring diagram

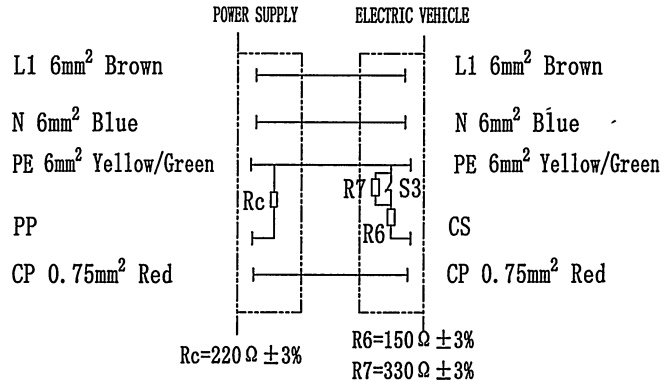

Laser Printing Front Note:

---

Laser Printing Back Note(Arial) :


MEAC-S-032A-P1-03-7.0M-31AH  
32A 250V AC  
IEC 62196-2:2016  
IP54  
201xxxxx-xxxx

Laser Printing Front Note(Arial) :

MAAC-S-032A-V-03-7.0M-31AH  
32A 250V AC  
IEC 62196-2:2016  
IP54  
201xxxxx-xxxx

Laser Printing Back Note:

**CE**

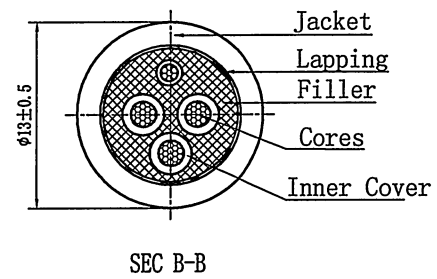

Technical parameters	
Rated voltage	250V AC
Rated current	32A
Temperature range	-30℃~+50℃
Insulate resistance	>5MΩ, 500V DC 1Min
Withstanding voltage	L、N AND PE, 2500V AC 1Min
	L AND N, 2500V AC 1Min
Ingress protection	IP54
The insertion/pullout times	10000 TIMES
Insertion/pullout force	<100N
Reference standard	IEC 62196-2:2016

Customer Drawing

- NOTES:
- Cable: IEC 62893-3 EN50620-2017 EV 3\*6mm<sup>2</sup>+1\*0.75mm<sup>2</sup> Black
  - RoHS Compliance

Size Measure Range	.XX	.X	PART NO. : /	NINGBO DEGSON ELECTRICAL CO., LTD	
≤6	±0.05	±0.10		APPD: ZX 2019/12/25	NAME: EV ELECTRIC VEHICLE AND EV POWER SUPPLY (32A single-phase)
6~30	±0.10	±0.20	CHKD: DT 2019.11.25	MHAC-S-032A-VP1-03-7.0M-31AH	
30~120	±0.15	±0.30	DRFT: XF LXD 2019-11-25	TITLE: Customer Drawing	REV: D0-1
120~400	±0.20	±0.50		DRAWING NO. : /	SHEET: 1/1
400~1000	±0.30	±0.80		DO NOT SCALE DRAWING	
1000~2000	±0.50	±1.20		SCALE: 1:6	
Angle Measure Range	.XX	.X	THIRD ANGLE PROJECTION		
	±0.5°	±1.0°			