



Pin	Symbol
1	GND
2	GND
3	NC
4	VCC
5	VCC
6	VCC
7	VCC
8	NC
9	DE
10	GND
11	GND
12	GND
13	R5
14	R4
15	R3
16	GND
17	R2
18	H1
19	H0
20	GND
21	G5
22	G4
23	G3
24	GND
25	G2
26	G1
27	G0
28	GND
29	R5
30	R4
31	R3
32	GND
33	R2
34	R1
35	R0
36	GND
37	GND
38	CLK
39	GND
40	GND

NOTES FOR TFT:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE.
2. OPERATING VOLTAGE: VDD=3.3V
3. VIEWING DIRECTION: 12 O'CLOCK.
4. DRIVER IC: HX8262+HX8678.
5. OPERATING TEMP: -20°C ~ 70°C.
6. STORAGE TEMP: -30°C ~ 80°C.
7. LED BACKLIGHT: 24-CHIP WHITE LED, If=160mA, Vf=9.6V.
8. GENERAL TOLERANCE: ±0.3mm.
9. RoHS COMPLIANT.

NOTES FOR CTP:

1. 7.0INCH PROJECTIVE CAPACITIVE TOUCH PANEL.
2. OPERATING VOLTAGE: VDD=3.3V.
3. COVER GLASS + SENSOR GLASS + FPCA.
4. RESOLUTION: 800 X 480 DOTS.
5. IC DRIVER: FT5426 (SMT).
6. MULTI FINGER: UP TO 5.
7. HARDNESS OF COVER SURFACE: 7H.

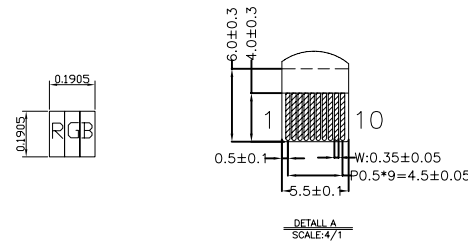

CTP FPC ASSIGNMENT:

1	VSS
2	VDD
3	SCL(SSEL)
4	NC(SCK)
5	SDA(MOSI)
6	NC(MISO)
7	RST
8	WAKE
9	INT
10	VSS

MI MULTI-INNO TECHNOLOGY CO.,LTD.

DRAWN BY:	CAROL 2015.08.25	SCALE : 1/1	MODULE P/N:
CHECKED BY:		UNIT: mm	MI0700AJT-3CP2
APPROVED BY:			DESCRIPTION:
VERSION NO:	01		TFT MODULE

VER.	REVISED DESCRIPTION	DATE
01	First issue	2015.08.25