
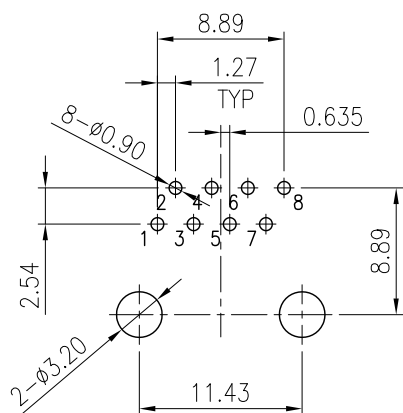







V1.3 NOTE: THIS DEVICE IS ROHS COMPLIANT.

REVISIONS							
SYM	DESCRIPTION	DATE	APPROVED	SYM	DESCRIPTION	DATE	APPROVED
△	NEW RELEASE	06/FEB/12*	AARON	△			
△	ADD DIM. & TOL.	08/JUN/20*	AARON	△			
**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!							121

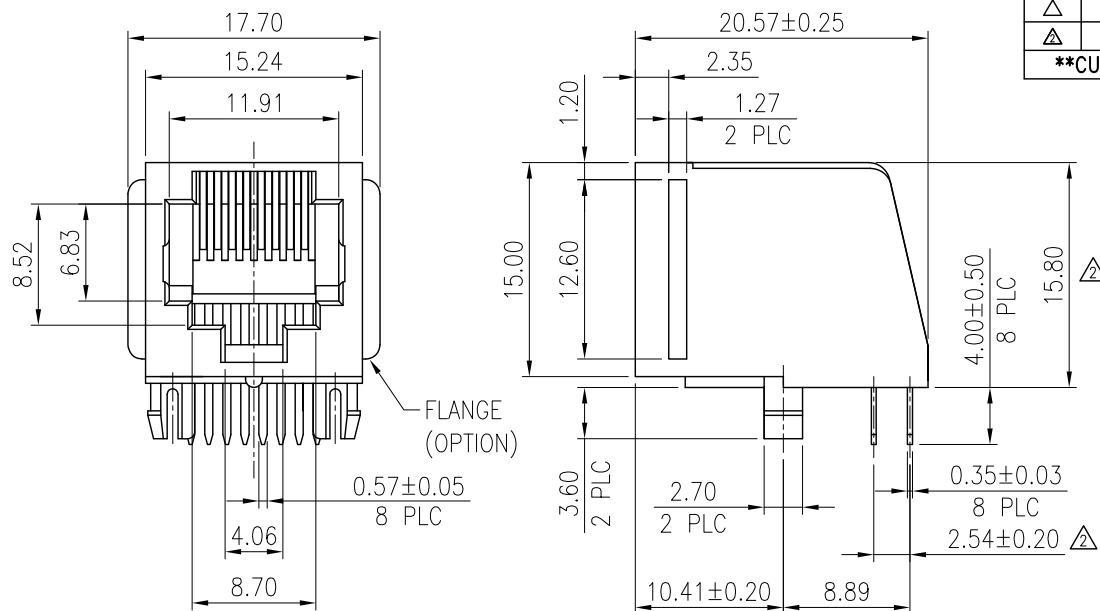

RECOMMENDED PCB LAYOUT
RECOMMENDED PCB THICKNESS: 1.6mm
TOLERANCE: ±0.05(TOP VIEW)

MATERIALS:
HOUSING: PBT WITH GLASS FIBER, UL94V-0, STANDARD COLOR: BLACK
CONTACTS: PHOSPHOR BRONZE, GOLD PLATED ON CONTACT AREA,
0.0254um[1u"] GOLD PLATED ON SOLDER TAIL
WITH ENTIRE CONTACT UNDERPLATED 1.27um[50u"]MIN. NICKEL

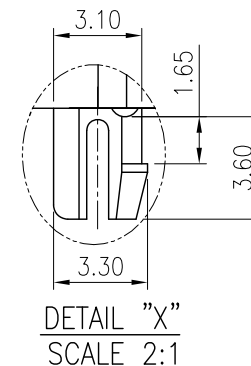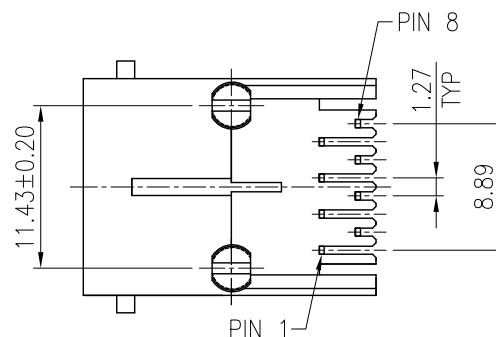

ORDER INFORMATION:
MJK602-Pa881GXF-K
MJK: MODULAR JACK
602: SERIES NO.
Pa: PCB TYPE, RIGHT ANGLE
88: NO. OF CONTACTS, 8P8C
1: COLOR OF PLASTIC, BLACK
GX: CONTACT PLATING OPTION
Gf: CONTACT PLATING, GOLD FLASH
G15: 15u" GOLD ON CONTACT
F: WITH FLANGE (OPTION)
K: WITH KEY (OPTION)

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.25			SIGNATURES		DATE	MODEL	
			DRAWN	KEN	16/JAN/08'	TITLE	
SYMBOL △	UNIT mm	SCALE 2/1	CHECKED	WENDY	16/JAN/08'	NO.	MODULAR JACK
			APPROVALS				MJK602-Pa881G_F-K
MMT CORPORATION							