
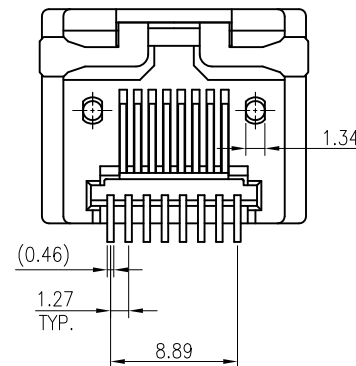
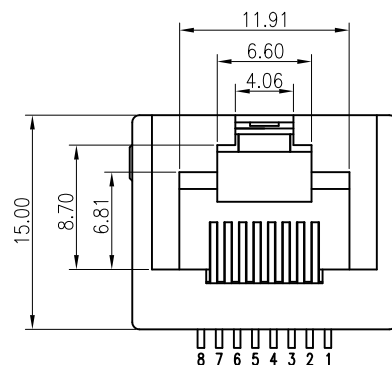



V1.3 NOTE: THIS DEVICE IS ROHS COMPLIANT.

REVISIONS					
SYM	DESCRIPTION	DATE	APPROVED	SYM	DESCRIPTION
△	NOTE ROHS STANDARD	05/JUN/07	AARON	△	REVISE DRAWING
△	MODIFY DRAWING	16/JAN/08	KEN	△	
**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!					121

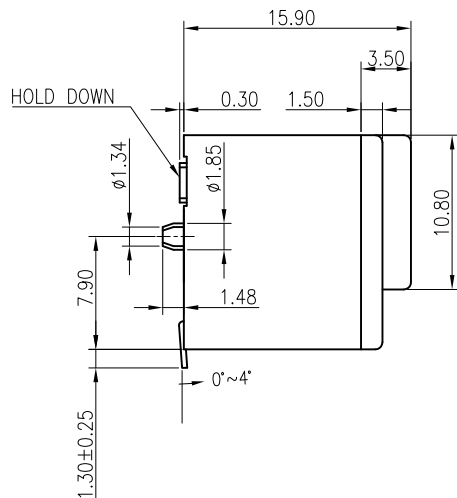


MATERIAL:
HOUSING: PA9T GN2330 HEAT RESISTANT PLOYAMIDE RESIN
BLACK COLOR, UL94V-0
INSERT HOUSING: DSM STANYL TE250F6 (NYLON-46)
HEAT DEFLECTION TEMP.290°
BLACK COLOR, UL94V-0.
CONTACTS: 0.35mm THICK PHOS-BRONZE PLATED WITH 6u"
HARD GOLD AND GOLD FLASH IN SOLDER AREA.
HOLD DOWN: 0.40mm THICK COPPER ALLOY, PLATED WITH TIN.

ORDER INFORMATION:
MJK739-Pt881Gf
MJK: MODULAR JACK
739: SERIES NO.
Pt: PCB TYPE, SURFACE MOUNT TYPE,
TOP ENTRY
88: NO. OF CONTACT, 8P8C
1: COLOR OF PLASTIC, BLACK
Gf: GOLD FLASH

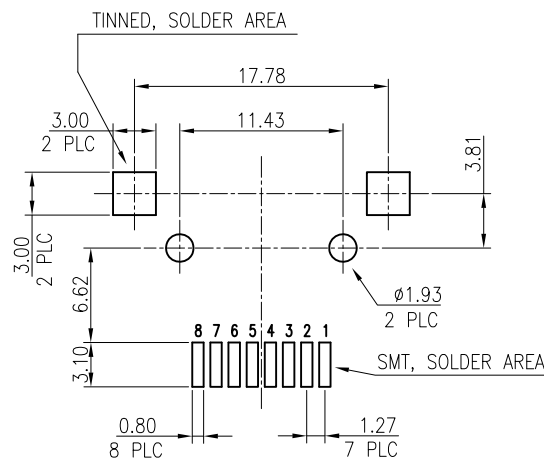

PCB LAYOUT
REF.

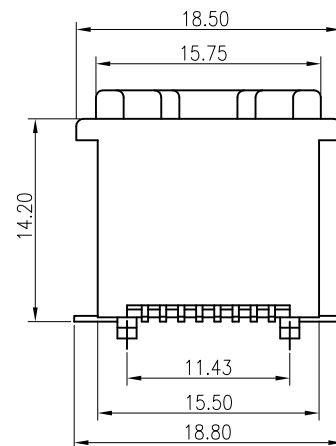

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.25			SIGNATURES		DATE	MODEL	
			DRAWN Frederick		05/OCT/04'	TITLE	
			CHECKED Sam		05/OCT/04'	MODULAR JACK	
SYMBOL	UNIT	SCALE	APPROVALS			NO.	
△	mm	2/1					MJK739—Pt881Gf
MMT CORPORATION							