


UNC #4-40 Hexscrew

UNC #4-40 Hexnut

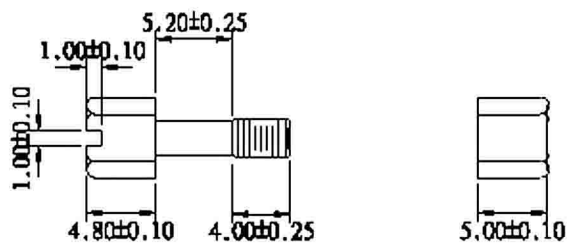

RoHS COMPLIANT

| REV | ECN NO. | DESCRIPTION | DATE |
|-----|---------|-------------|------------|
| A | | RELEASE | JUL. 13'07 |
| B | | MODIFY P/N | MAR. 28'11 |

Label: yellow color with black character
 One side: MINI GENDER CHANGER
 The other side: U.S.A. PATENT 5199906 ~~USA~~
 SPECIFICATION
 INSULATOR: PBT Glass fibre reinforced UL 94 V0
 CONTACT: Brass
 CONTACT PLATING: Gold plated over nickel
 SHELL: Tin Plated Shell
 CURRENT RATING: 3 AMP
 DIELECTRIC STRENGTH: 1000V AC for one minute
 INSULATOR RESISTANCE: 1000MΩ min at 500V DC
 TEMPERATURE: -55°C—+105°C

PIN ASSIGNMENT

| 15F | 15F |
|-----|-----|
| 1 | 1 |
| 2 | 2 |
| 3 | 3 |
| 4 | 4 |
| 5 | 5 |
| 6 | 6 |
| 7 | 7 |
| 8 | 8 |
| 9 | 9 |
| 10 | 10 |
| 11 | 11 |
| 12 | 12 |
| 13 | 13 |
| 14 | 14 |
| 15 | 15 |
| G | G |

TOLERANCE UNLESS OTHERWISE SPECIFIED

| LINEAR | ANGLE |
|------------|---------|
| X. ± | X° ± |
| .X ± 0.20 | .X° ± |
| .XX ± 0.10 | .XX° ± |
| .XXX± | .XXX° ± |

| | |
|------|--------------|
| APPD | |
| CHKD | |
| DRAW | Z |
| | MAR. 28'2011 |

PROJECTION

| | |
|-------|----|
| UNITS | MM |
| SCALE | |
| SIZE | A4 |



GOLD-TEK ELECTRIC CO., LTD.

TITLE
 MINI GENDER CHANGER
 HIGH DENSITY 15F-15F

| | |
|-----------------------|-----------------|
| PART NO. MNGCH15FF | SHEET 1 OF 1 |
| CAD NO. I650 | |
| F:\PDF\DSUB\DSUB-0151 | |

圖面編號: GTKSD2267-B(1)