


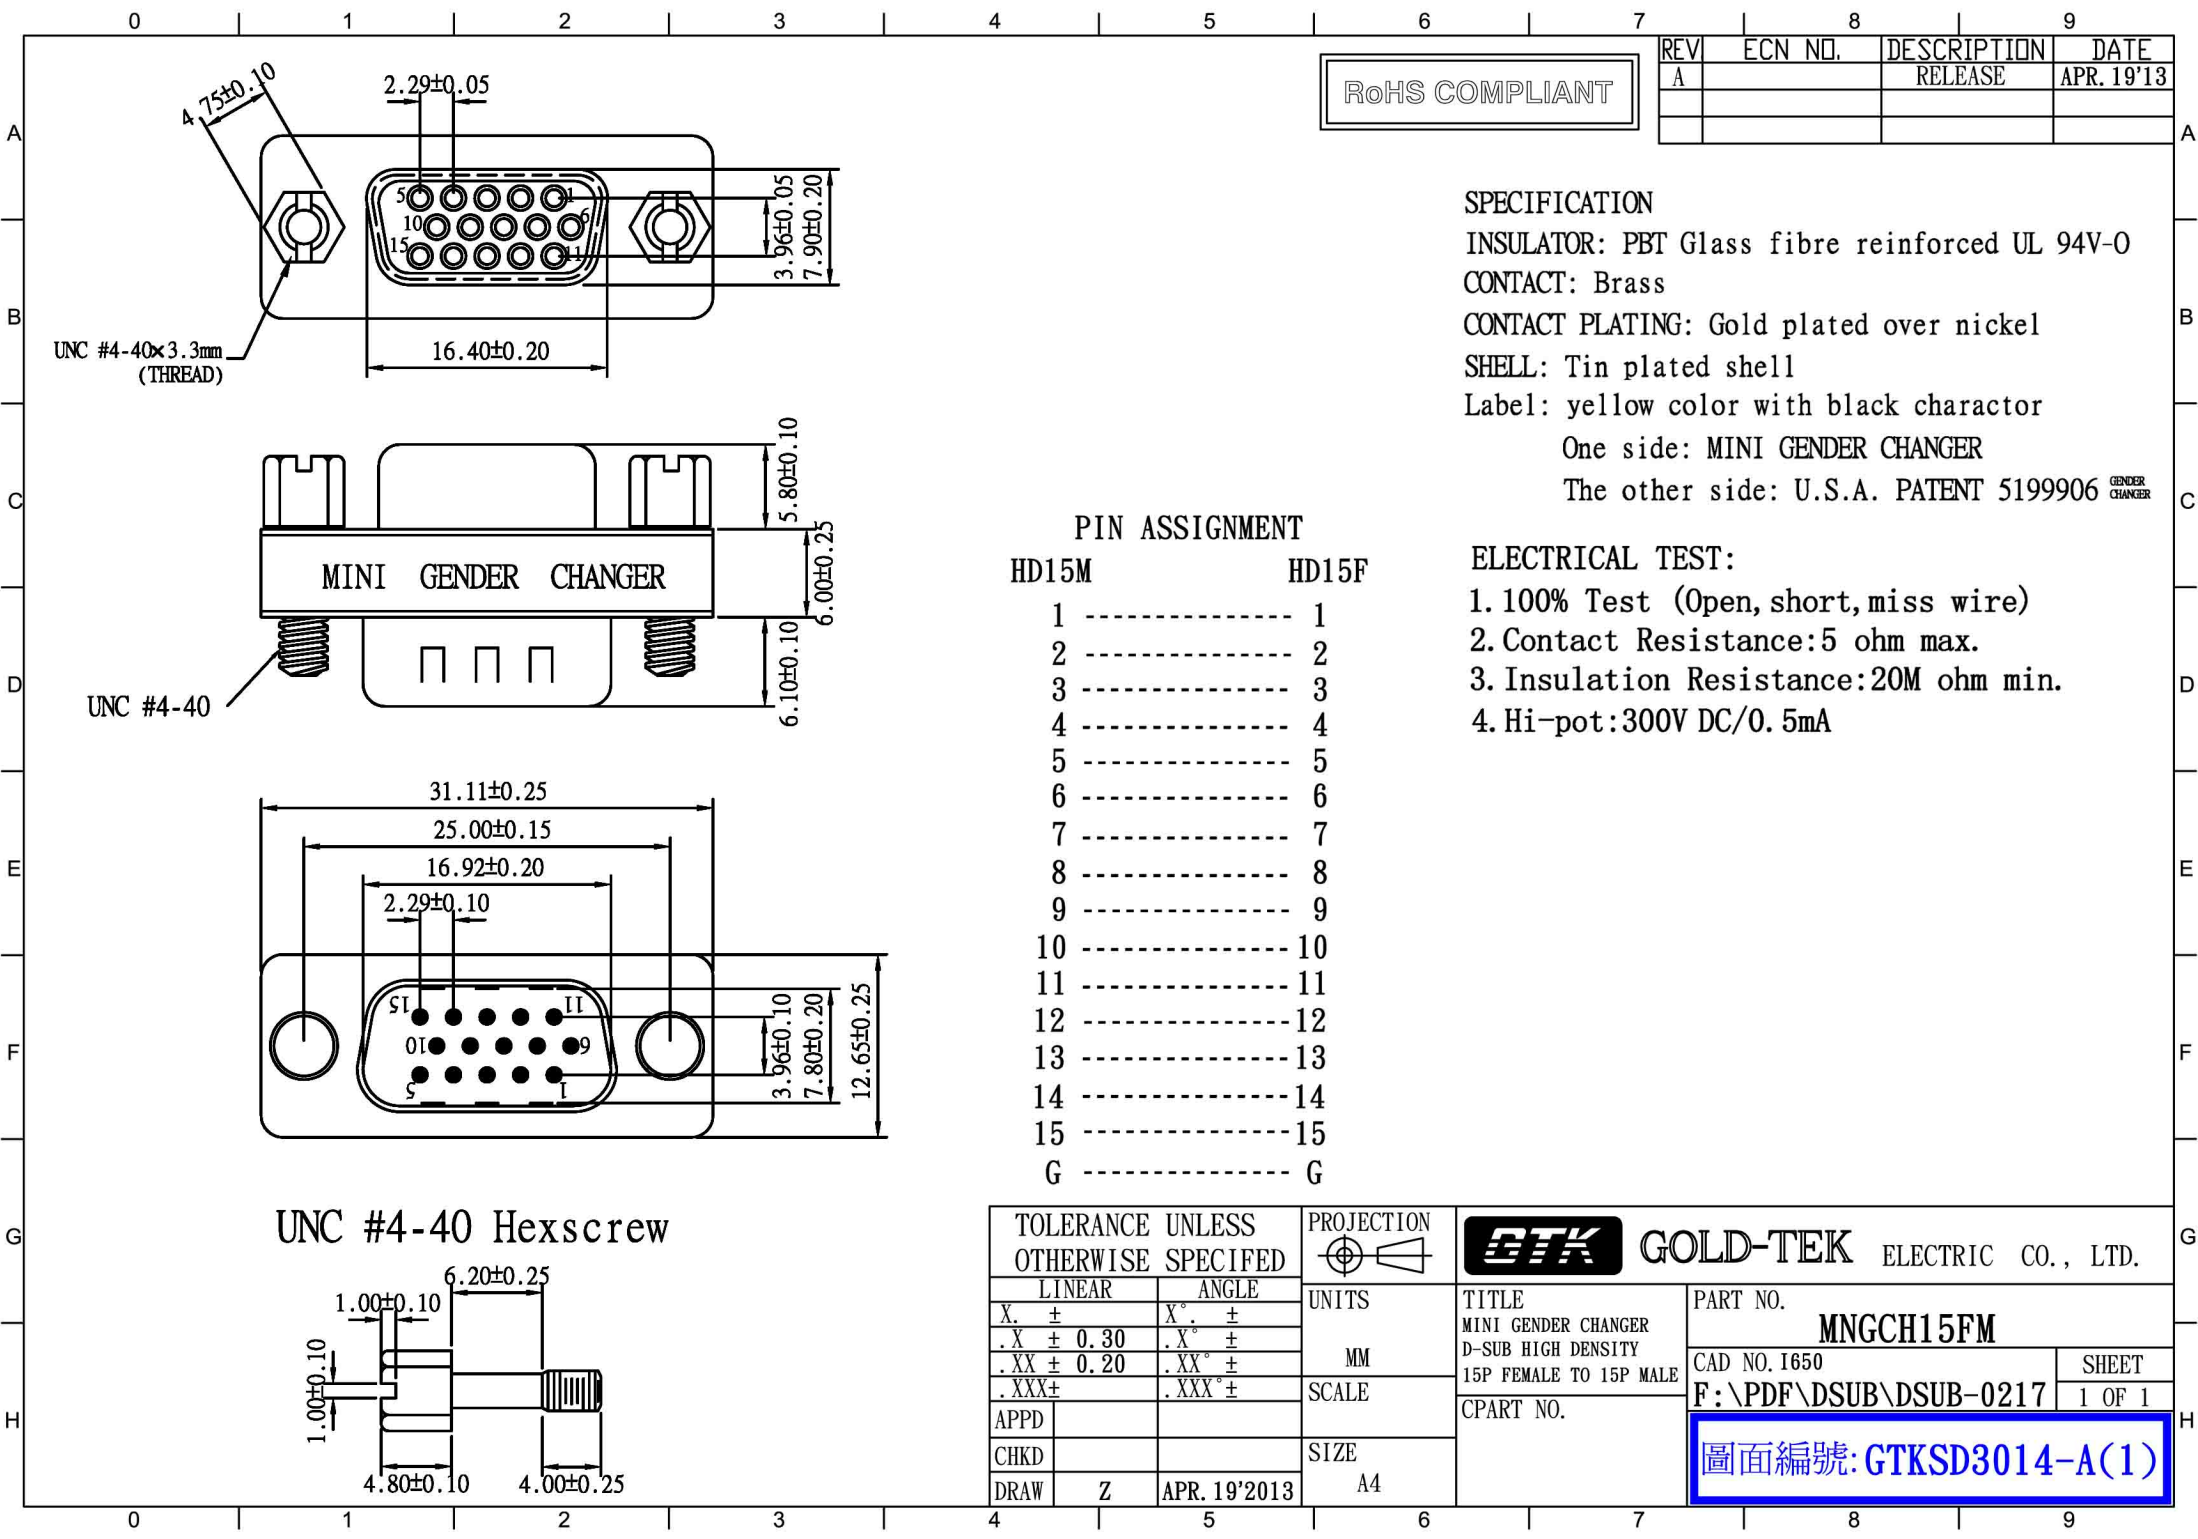

RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	APR. 19'13

SPECIFICATION
INSULATOR: PBT Glass fibre reinforced UL 94V-0
CONTACT: Brass
CONTACT PLATING: Gold plated over nickel
SHELL: Tin plated shell
Label: yellow color with black charactor
One side: MINI GENDER CHANGER
The other side: U.S.A. PATENT 5199906

PIN ASSIGNMENT		
HD15M		HD15F
1	-----	1
2	-----	2
3	-----	3
4	-----	4
5	-----	5
6	-----	6
7	-----	7
8	-----	8
9	-----	9
10	-----	10
11	-----	11
12	-----	12
13	-----	13
14	-----	14
15	-----	15
G	-----	G

ELECTRICAL TEST:
1. 100% Test (Open, short, miss wire)
2. Contact Resistance: 5 ohm max.
3. Insulation Resistance: 20M ohm min.
4. Hi-pot: 300V DC/0.5mA

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION	GOLD-TEK ELECTRIC CO., LTD.	
LINEAR	ANGLE	UNITS	TITLE	
X. ±	X° ±		MINI GENDER CHANGER	
.X ± 0.30	.X° ±		D-SUB HIGH DENSITY	
.XX ± 0.20	.XX° ±	SCALE	15P FEMALE TO 15P MALE	
.XXX ±	.XXX° ±		CPART NO.	
APPD		SIZE	PART NO.	
CHKD			MNGCH15FM	
DRAW	Z	APR. 19'2013	CAD NO. I650	
			F:\PDF\DSUB\DSUB-0217	
			SHEET 1 OF 1	
			圖面編號: GTKSD3014-A(1)	