

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

- 1.Torque value : M3 , 4.43Lb.in
- 2.Wire range : 24~12AWG

IEC Standard

1.

Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8.0KV
- 2.Torque value : M3 , 0.5N·m
- 3.Wire range : 0.2~2.5mm²

NOTES2:




- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 5.20mm, Poles : N=01P
- 3.Stripping length : 7~8mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm				-	∩	∇
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

6.RoHS Compliance

PC2.5-PE - 01P - 1Y - 00A (H)

(Series No.) (Poles)(Single Pitch) (Color) : 1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

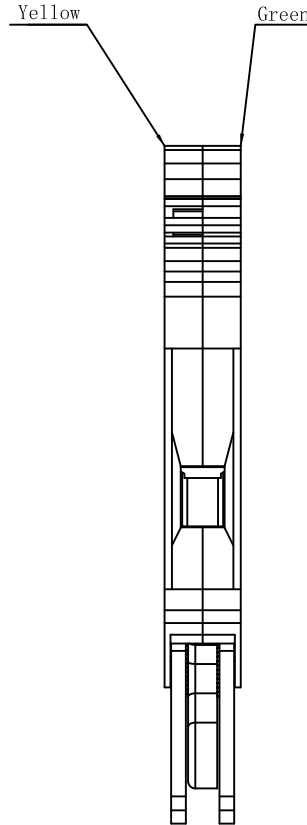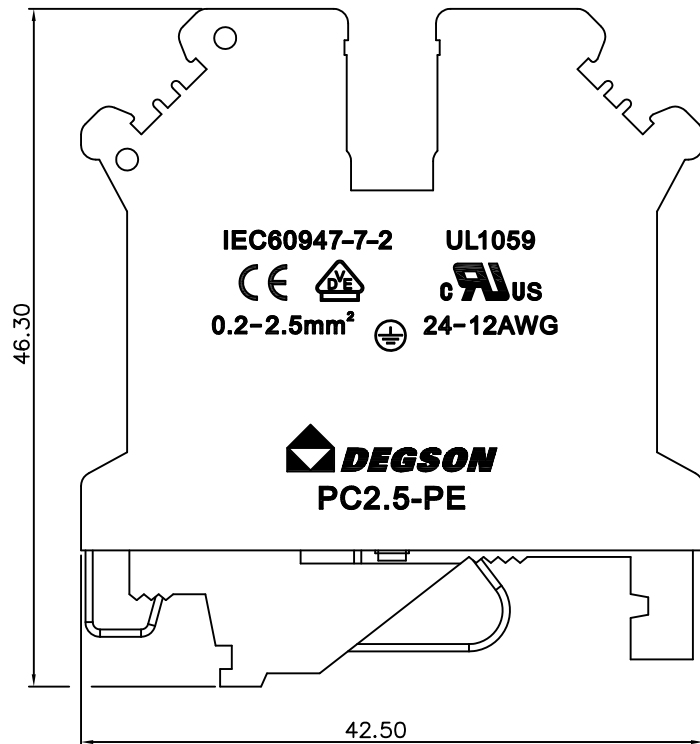

DETACHED LISTS	PART NO.:	/				宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	/				NAME:			
	CHKD:	/				PC2.5-PE-01P-1Y-00A(H)			
	DRFT:	/				TITLE: CUSTOMER DRAWING		REV	DO
			THIRD ANGLE PROJECTION		DRAWING NO.:		/	SHEET	1/1
		MM (INCH)		DO NOT SCALE DRAWING		SCALE		1:1	