

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

1.Torque value : M3 , 4.43Lb.in

2.Wire range : 24~10AWG

IEC Standard

1.

Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8.0KV

2.Torque value : M3 , 0.5N·m

3.Wire range : 0.2~4mm²

NOTES2:

1.Dimension shall be interpreted per
ASME Y14.5-2009

2.Pitch : 6.20mm, Poles : N=01P

3.Stripping length : 7~8mm




4.Operating temperature: -40°C~+105°C


5.Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm						0.1/10 ±2°
TO	Over	Over	TO	Over	Over	Over	Over	Over	
6	6 TO 10	10 TO 24	30	30 TO 60	60 TO 100	100 TO 150	150	150	
	±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	

6.RoHS Compliance

PC4-PE - 01P - 1Y - 00A (H)
(Series No.) (Poles) (Single Pitch) (Color):1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

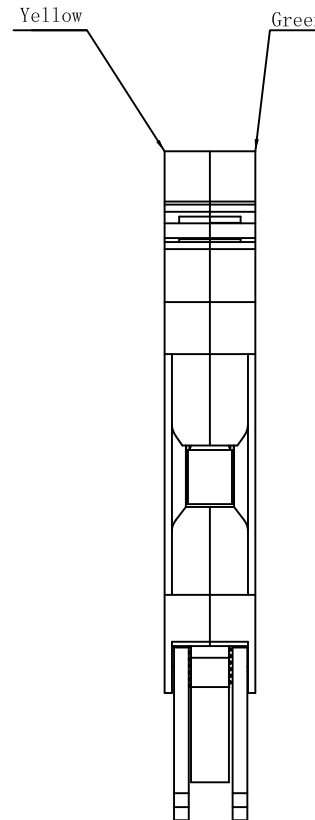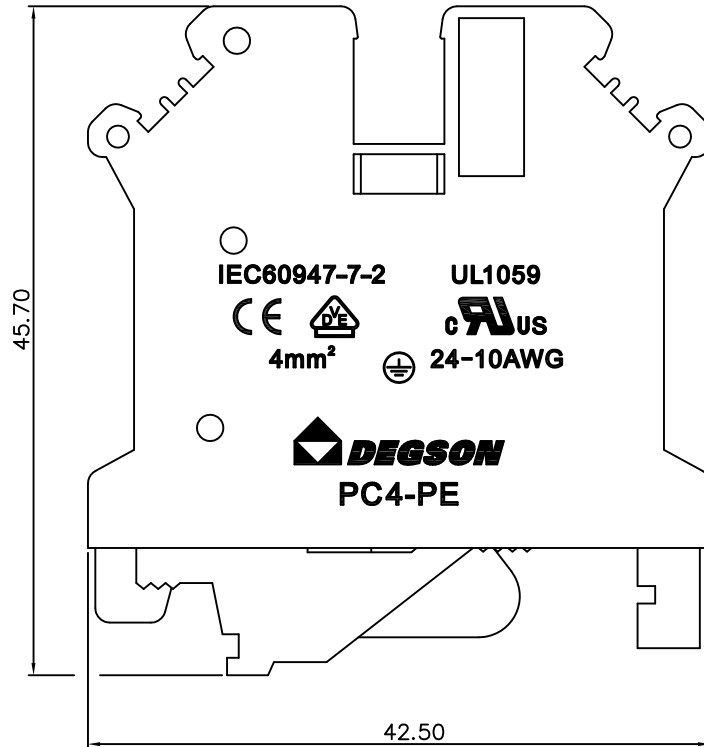

DETACHED LISTS	PART NO.: /		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD: /		NAME: PC4-PE-01P-1Y-00A(H)			
	CHKD: /					
	DRFT: /		TITLE: CUSTOMER DRAWING		REV	DO
	 THIRD ANGLE PROJECTION		DRAWING NO.: /		SHEET	1/1
			MM (INCH)	DO NOT SCALE DRAWING	SCALE	1: 1