

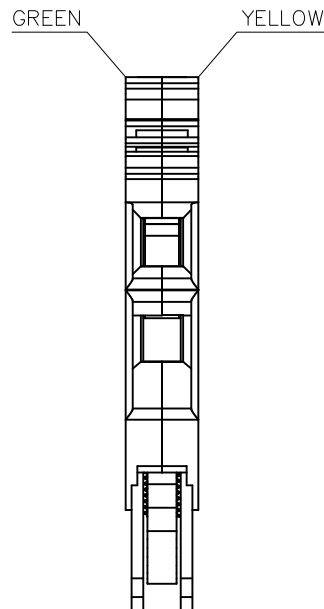
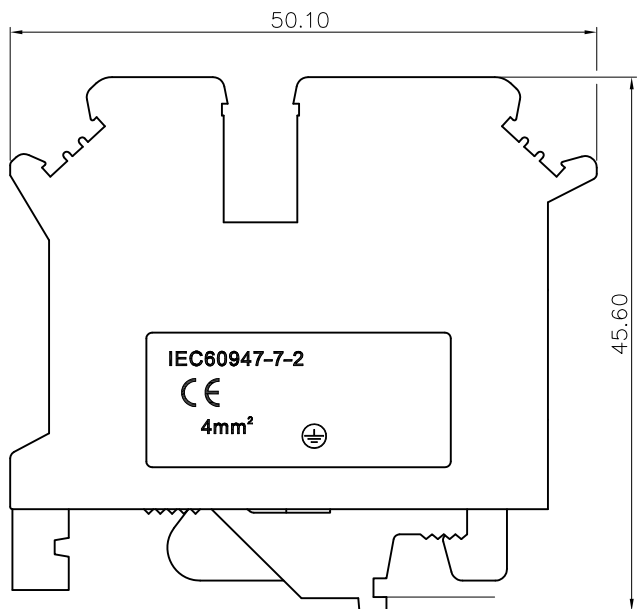


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------



(W/O COVER)

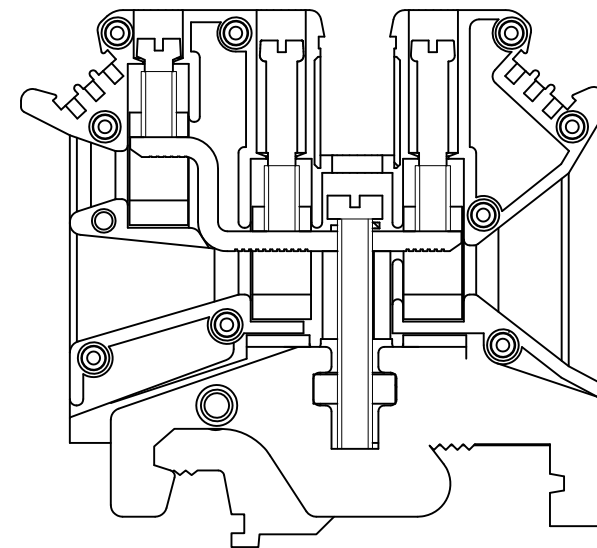

NOTES1:

UL Standard

- 1.Torque value : M3 , 4.43Lb.in
- 2.Wire range : 24~12AWG

IEC Standard

1.

Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8.0KV
- 2.Torque value : M3 , 0.5N·m
- 3.Wire range : 0.2~4.0mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 6.20mm, Poles : N=01P
- 3.Stripping length : 7~8mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm							
	Over 6	Over 10		Over 30	Over 60	Over 100	Over 150		0.1/10
TO	TO	TO	TO	TO	TO	TO	TO		<
6	10	24	30	60	100	150			
±0.15		±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'

6.RoHS Compliance

DETACHED LISTS	PART NO.:	/	 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	/	NAME:			
	CHKD:	/	PC4-TW-PE-01P-1Y-00A(H)			
	DRFT:	/	TITLE: CUSTOMER DRAWING		REV	D0
	 THIRD ANGLE PROJECTION		DRAWING NO.: /		SHEET	1/1
 MM (INCH) DO NOT SCALE DRAWING			SCALE	1:1		