
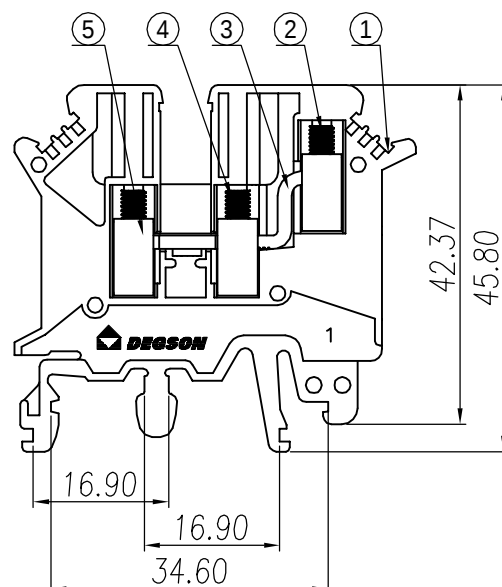

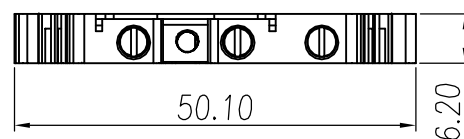


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
1	10-0167	增加UL认证刻字	Jinhai. Luo	06/04/10'

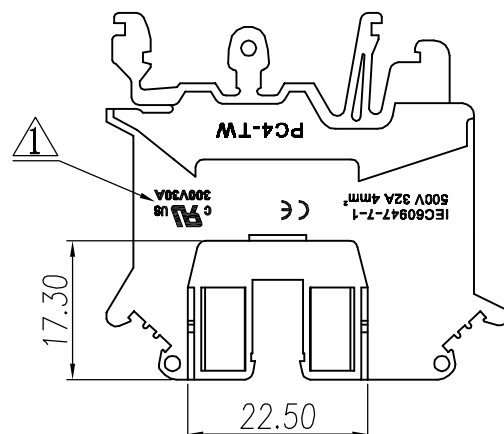

Notes:

1. Rated voltage/current:UL 300V/30A
IEC 500V/32A
2. Operation temperatures:-40℃~+105℃
3. Withstanding Voltage:AC3000V/1Min
4. Insulation Resistance:5000MΩ /DC1000V
5. Wire Range:24~12AWG, 4mm²
6. Max. Torque Value:M3, 5. 10kgf. cm
7. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	⌒
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	▱

5	PC4-Brass Cage	X000000630 (H)	3	Brass	Ni Plated
4	PCDK2.5 M3"-Screw	S000002580 (H)	2	Brass	Ni Plated
3	PC4-TW Current Carrier	6148B00010 (H)	1	Copper	SnCe Plated
2	PC2.5B M3"-Screw	S000001100 (H)	1	Brass	Ni Plated
1	PC4-TW Housing	6148A0Y01A (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
MM (INCH) TOLERANCES EXCEPT AS NOTED MM .0 ± .00 ± .000 ± ± ± ± ANGLES ± 1° THIRD ANGLE PROJECTION DFTD ZYH CHKD MFD APPVL G.E FINISH: SCALE : 1:1 DATE 02/18/08' DATE DATE DATE DATE FINISH: DO NOT SCALE DRAWING NAME PC4-TW-01P-1Y-00A(H) DRAWING NO. PC4-TW-E01 /PART NO. SIZE A4 REV T1 06/04/10' DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD					
SHEET 1			OF 1		