

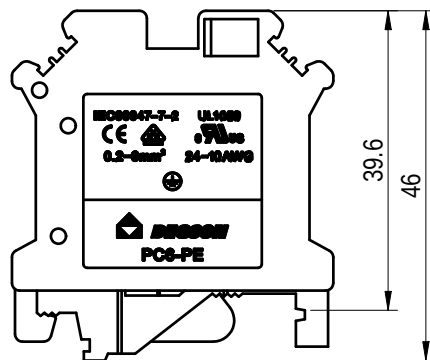


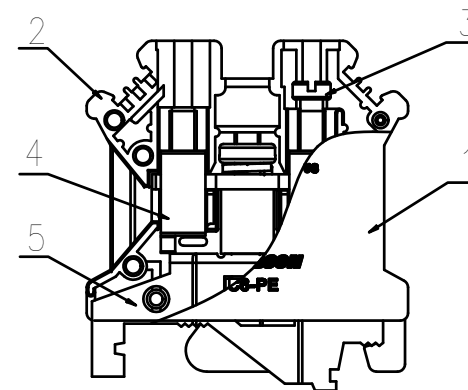

-00A: Standard products,
 **A...Z: Special product
 (01~9999 stands
 for customer code)
 (Color): 4.(Green)
 8.(Yellow)

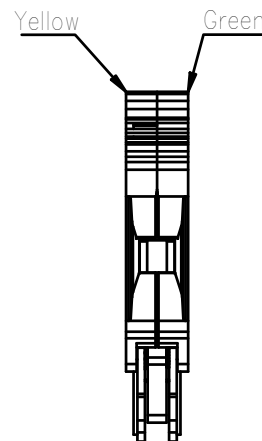

5	Ground contact	/	/
4	Cage	Copper Alloy	M4/Ni Plated
3	Screw	Copper Alloy	M4/Ni Plated
2	Housing2	PA66	UL94 V-0
1	Housing1	PA66	UL94 V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	/	/
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8.0	/	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M4, 1.2/10.53		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	24~10 / 0.2~6.0		
间距/Pitch(mm)	8.20		
剥线长度/Stripping length(mm)	8~9		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		

			MATERIAL: /			SURFACE/COLOR: /		
			MAT NO./REV: 11010000097-1 / 00			MAT STATUS: 批量		
APPD: Peng M	2022.11.4	NAME PC6-PE-01P-1Y-00A&Z (H) (00)						
CHKD: Gao WG	2022.11.4							
DRFT: Chen KZ	2022.11.4	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET		
 A4	 (inch)	200118950	CUSTOMER DRAWING	/	1:1	1/1		

00	/	Update part name	Chen KZ	2022.11.4
REV	ECN	DESCRIPTION	DRFT	DATE