

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized. Violation is prohibited. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、商业秘密等权利外，本公司保留所有权利。 未经授权，不得复制或传播。

FOR-1755 Rev.1.6

2

3




4

5

6

未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500		±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

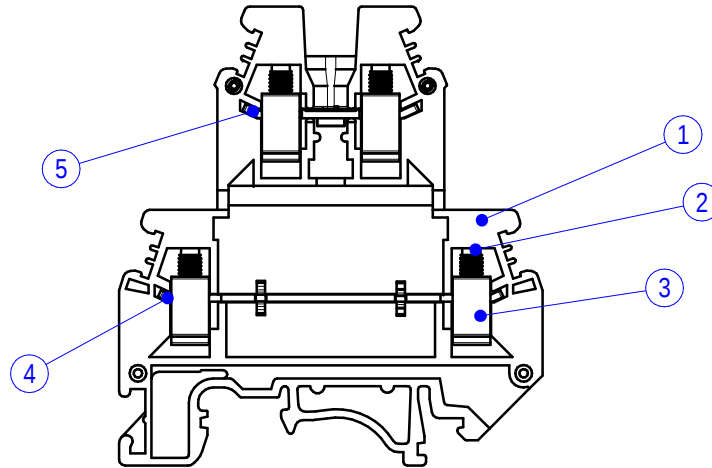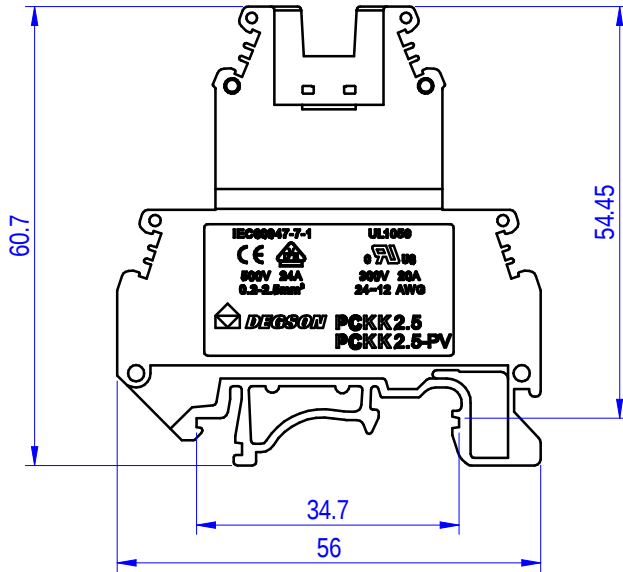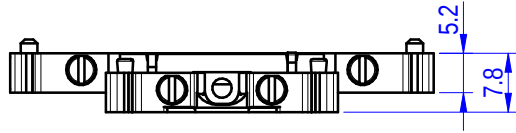

5	Short carrier fluid	Copper	Sn Plated
4	Long carrier fluid	Copper	Sn Plated
3	Cage	Copper alloy	Ni Plated
2	Screw	Copper alloy	Ni Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/20	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	500/24	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6	/	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M3, 0.5/4.5		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	24~12 / 0.2~2.5		
线数范围/Poles	N=01P		
剥线长度/Stripping length(mm)	8~9		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		

		MATERIAL:	SURFACE/COLOR:	
APPD: 李根芳		MAT NO./REV: 11010000123-1 / 00		MAT STATUS: 批量
CHKD: 马恩开		NAME		
DRFT: 胡藻敬		PCKK2.5-01P-11-00A&Z(H)		
DRAWING NO. 200076327		TYPE CUSTOMER DRAWING	DRAWING STATUS 已发布	SCALE 2:1
SHEET 1/1				

00		change printing	胡藻敬	2022.07.19
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6