

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing. Violation will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利、商标、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、商业秘密、技术秘密、其他知识产权等权利外，本公司保留对涉及发明、实用新型和外观设计的所有权利。

FOR-1755 Rev.1.8

2





3

4

5

6

未注公差/General tolerances (mm)													 0.1/10  ±2°
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

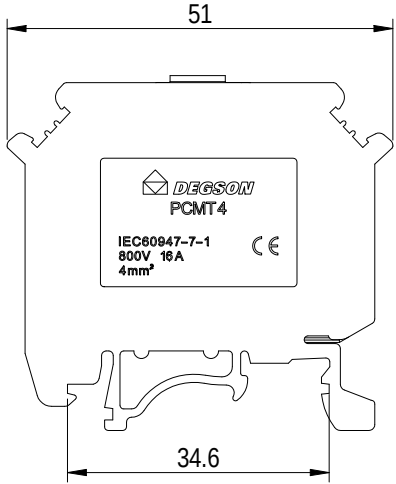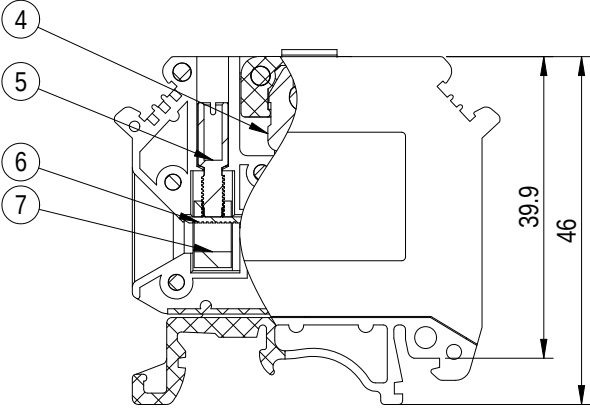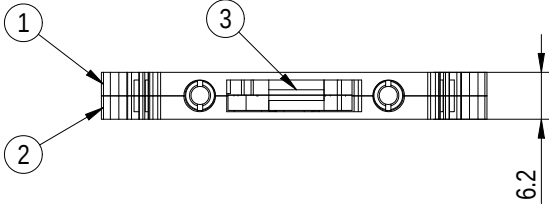

7	Cage	Copper alloy	M3/Ni plated	
6	Clamp	Copper alloy	Ni plated	
5	Screw	Copper alloy	M3/Ni plated	
4	Knife switch	/	Sn plated	
3	Knife box	PA66	UL94 V-0	
2	Housing 2	PA66	UL94 V-0	
1	Housing 1	PA66	UL94 V-0	
ITEM	NAME OF PART	MATERIAL	NOTES	
UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		600V/15	/	/
IEC 标准/IEC Standard:				
过压类别/Ovenoltage Category/污染等级/Pollution Degree		III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)		800/16	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		/	/	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M3, 0.5/4.43		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)		24~12/ 0.2~4		
间距/Pitch(mm)/线数范围/Poles		6.20/N=01P		
剥线长度/Stripping length(mm)		7~8		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		
标准颜色编号/Standard color number: PANTONE / RAL		/		

		MATERIAL: /		SURFACE/COLOR: /	
APPD: Peng M		2023.09.11		NAME	
CHKD: Gao WG		2023.09.11		MAT NO./REV: /	
DRFT: Ye XD		2023.09.11		MAT STATUS: 批量	
DRAWING NO.		TYPE		DRAWING STATUS	
/		CUSTOMER DRAWING		SCALE	
1:1		SHEET		1/1	

00	/	Update drawing frame	Ye XD	2023.09.11
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6