

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

- 1.Rated voltage/current : 600V / 15A
- 2.Withstanding voltage : AC2200V/1Min.
- 3.Torque value : M3 , 4.43Lb.in
- 4.Wire range : 24~12AWG

IEC Standard

1. Pollution Degree	3
Overtoltage Category	III
Rate Impulse Voltage(KV)	8.0KV
Rate Voltage(V)	800V
Rate Current(A)	16A

- 2.Torque value : M3 , 0.5N·m
- 3.Wire range : 0.2~4mm<sup>2</sup>





NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 6.20mm, Poles : N=01P
- 3.Stripping length : 8~9mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm					0.1/10
TO	Over TO	Over TO	TO	Over TO	Over TO	Over TO		
6	10	24	30	60	100	150	±	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	

6.RoHS Compliance

PCMT4 - 01P - 1Y - 00A (H)  
 (Series No.) (Poles) (Single Pitch) (Color): 1.(Grey) 2.(Blue) 3.(Black) 4.(Green) 5.(Orange) 6.(Red) 7.(Transparent) 8.(Yellow) 9.(White)  
 (RoHS)  
 00A-(Standard)

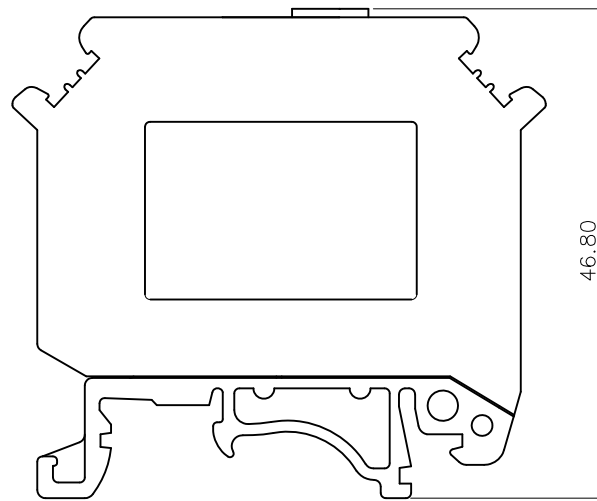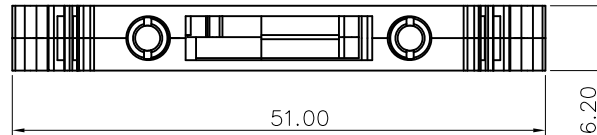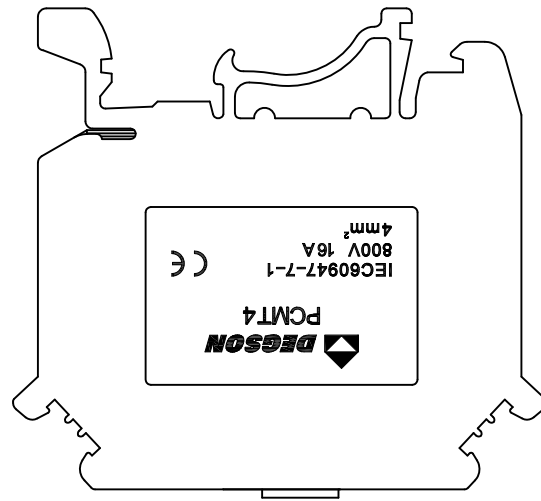

DETACHED LISTS	PART NO.:	/		
	APPD:	/		
	CHKD:	/		
	DRFT:	/		
	DRAWING NO.:		/	
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING		
NAME:		PCMT4-01P-1Y-00A(H)	REV	D0
TITLE:		CUSTOMER DRAWING	SHEET	1/1
MM (INCH)		SCALE	1:1	