
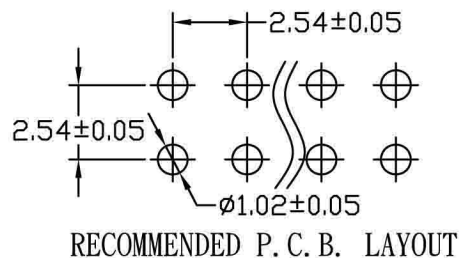
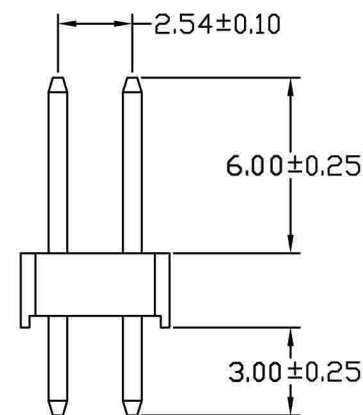
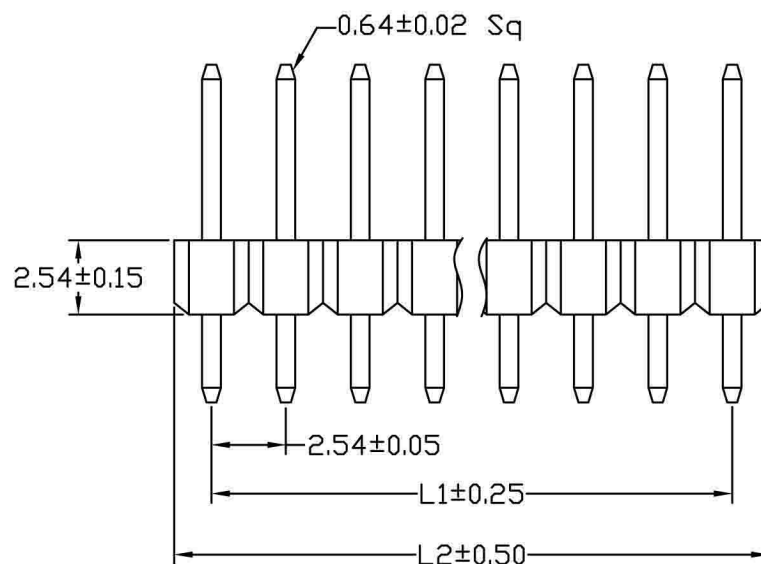


| Cir-<br>cuits | Dimension mm |        |
|---------------|--------------|--------|
|               | L1           | L2     |
| 2X2           | 2.54         | 5.08   |
| 2X3           | 5.08         | 7.62   |
| 2X4           | 7.62         | 10.16  |
| 2X5           | 10.16        | 12.70  |
| 2X6           | 12.70        | 15.24  |
| 2X7           | 15.24        | 17.78  |
| 2X8           | 17.78        | 20.32  |
| 2X9           | 20.32        | 22.86  |
| 2X10          | 22.86        | 25.40  |
| 2X11          | 25.40        | 27.94  |
| 2X12          | 27.94        | 30.48  |
| 2X13          | 30.48        | 33.02  |
| 2X14          | 33.02        | 35.56  |
| 2X15          | 35.56        | 38.10  |
| 2X16          | 38.10        | 40.64  |
| 2X17          | 40.64        | 43.18  |
| 2X18          | 43.18        | 45.72  |
| 2X19          | 45.72        | 48.26  |
| 2X20          | 48.26        | 50.80  |
| 2X21          | 50.80        | 53.34  |
| 2X22          | 53.34        | 55.88  |
| 2X23          | 55.88        | 58.42  |
| 2X24          | 58.42        | 60.96  |
| 2X25          | 60.96        | 63.50  |
| 2X26          | 63.50        | 66.04  |
| 2X27          | 66.04        | 68.58  |
| 2X28          | 68.58        | 71.12  |
| 2X29          | 71.12        | 73.66  |
| 2X30          | 73.66        | 76.20  |
| 2X31          | 76.20        | 78.74  |
| 2X32          | 78.74        | 81.28  |
| 2X33          | 81.28        | 83.82  |
| 2X34          | 83.82        | 86.36  |
| 2X35          | 86.36        | 88.90  |
| 2X36          | 88.90        | 91.44  |
| 2X37          | 91.44        | 93.98  |
| 2X38          | 93.98        | 96.52  |
| 2X39          | 96.52        | 99.06  |
| 2X40          | 99.06        | 101.60 |

RoHS COMPLIANT

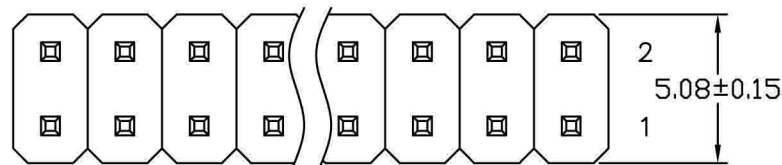

| REV | ECN NO. | DESCRIPTION | DATE       |
|-----|---------|-------------|------------|
| A   |         | RELEASE     | AUG. 21'08 |
| B   |         | MODIFY P/N  | SEP. 06'11 |

## SPECIFICATIONS

Current Rating:

3 Amp

Insulator resistance:

1000 Megohms Min.

Contact Resistance:

20 m ohms Max.

Dielectric withstanding:

AC 500V/minute

Operating Temperature:

-40° ~ +105°C

Contact Material:

Brass

Insulator Material:

Nylon-6T UL94V-0

Color: Black

Finish:

Gold plated

TOLERANCE UNLESS  
OTHERWISE SPECIFIED

| LINEAR     | ANGLE   |
|------------|---------|
| X. ±       | X° ±    |
| .X ± 0.30  | .X° ±   |
| .XX ± 0.25 | .XX° ±  |
| .XXX ±     | .XXX° ± |

|      |   |
|------|---|
| APPD |   |
| CHKD |   |
| DRAW | Z |

PROJECTION



UNITS

MM

SCALE

SIZE

A4



GOLD-TEK ELECTRIC CO., LTD.

TITLE  
2.54mm Pin Header

CPART NO.

PART NO.  
PHDS\*\*G11-LF

CAD NO. I642  
F:\PDF\PH\PH-0414

SHEET  
1 OF 1

圖面編號:GTKSD2548-B(1)