


Dimensional & Ordering Information:

RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	OCT. 05' 06



SPECIFICATIONS

Current Rating:

3 Amps

Insulator resistance:

1000 Megohms Min.

Dielectric withstanding:

AC 500 V

Operating Temperature:

-40°C ~ +105°C

Contact Material:

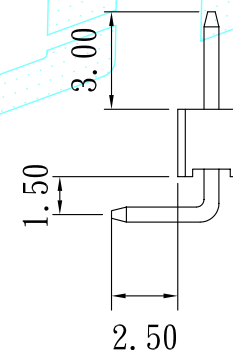
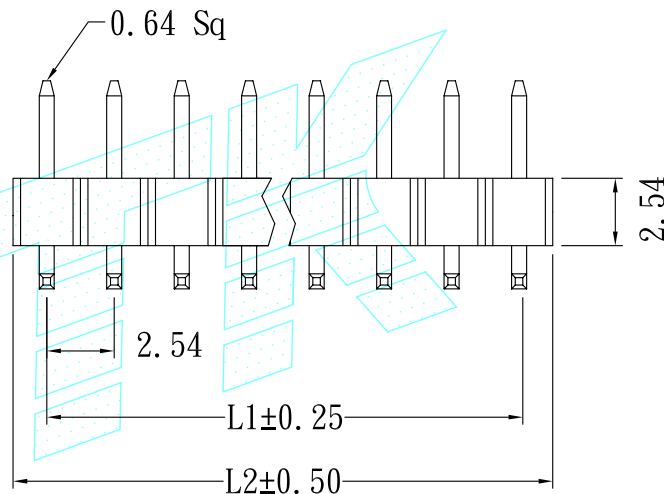
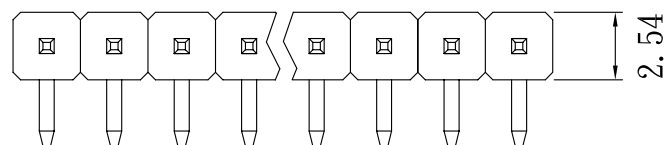

Brass

Insulator Material:

P.B.T UL94V-0


Finish:

G:Gold flash

Recommended P.C.Board
Hole LayoutTOLERANCE UNLESS
OTHERWISE SPECIFIED

LINEAR	ANGLE
X. ±	X° ±
.X ± 0.38	.X° ±
.XX ± 0.25	.XX° ±
.XXX ±	.XXX° ±
APPD	
CHKD	
DRAW	Z

PROJECTION



UNITS

MM

SCALE

SIZE

A4



GOLD-TEK ELECTRIC CO., LTD.

TITLE
2.54MM PIN HEADER
90° LOW PROFILE

CPART NO.

PART NO.
PHSL**G10/3/2.5/1.5/RHCAD NO. 1642
F:\Drw\PH\PH-0309SHEET
1 OF 1

圖面編號:GTKGS1509-A(1)