



Dimensional

Cir- cuits	Dimension mm	
	L1	L2
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80
21	50.80	53.34
22	53.34	55.88
23	55.88	58.42
24	58.42	60.96
25	60.96	63.50
26	63.50	66.04
27	66.04	68.58
28	68.58	71.12
29	71.12	73.66
30	73.66	76.20
31	76.20	78.74
32	78.74	81.28
33	81.28	83.82
34	83.82	86.36
35	86.36	88.90
36	88.90	91.44
37	91.44	93.98
38	93.98	96.52
39	96.52	99.06
40	99.06	101.60

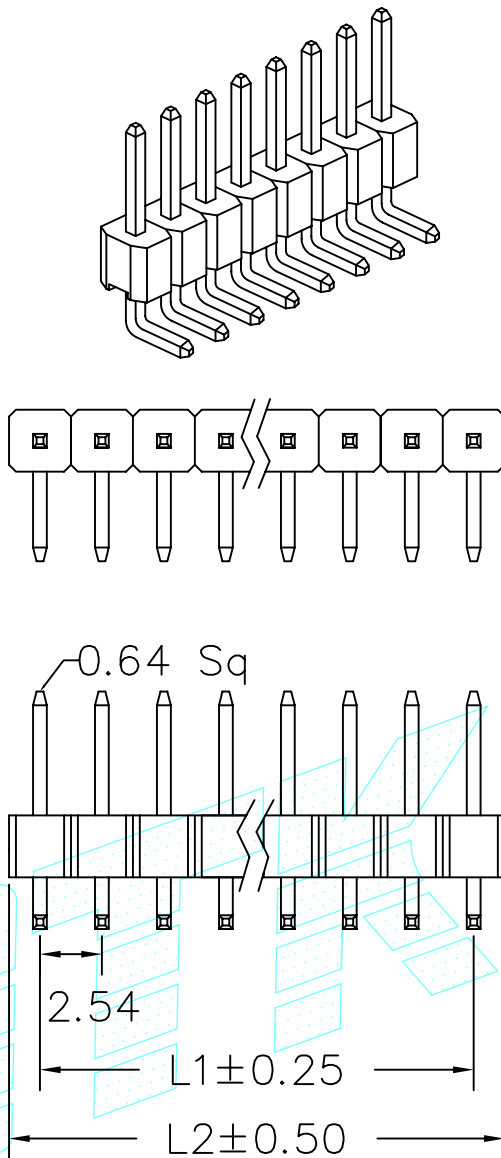

RoHS COMPLIANT

Recommended
P.C.Board
Hole Layout

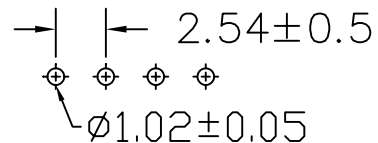

REV	ECN NO.	DESCRIPTION	DATE
A		REDRAWN	APR.02'01
B		MODIFY PART_NO	JUN.04'01
C		ADD. RoHS	JUL.07'09
D		MODIFY P/N	JUL.07'09

SPECIFICATIONS

Current Rating:
3 Amps

Voltage Rating:
230V

Contact Resistance:
20m ohms Max.

Insulator resistance:
5000 Megohms Min.

Dielectric withstanding:
AC 1000V/Minute

Operating Temperature:
-40° - +105°C

Contact Material:
Brass

Insulator Material:
Standard: P.B.T UL94V-0
Color: Black


Finish:
Gold flash

TOLERANCE UNLESS
OTHERWISE SPECIFIED

LINEAR	ANGLE
X. ±	X° ±
.X ± 0.35	.X° ±
.XX ± 0.25	.XX° ± 2°
.XXX ±	.XXX° ±

APPD	
CHKD	
DRAW	Z.

PROJECTION



UNITS

MM

SCALE

SIZE

A4



GOLD-TEK ELECTRIC CO., LTD.

TITLE
2.54MM PIN
HEADER
LOW PROFILE
CPART NO

PART NO.

PHSL**G10

CAD NO. I642

F: \Drw\PH\PH-0059

SHEET

1 OF 1

圖面編號:GTKSD0680-D(1)