


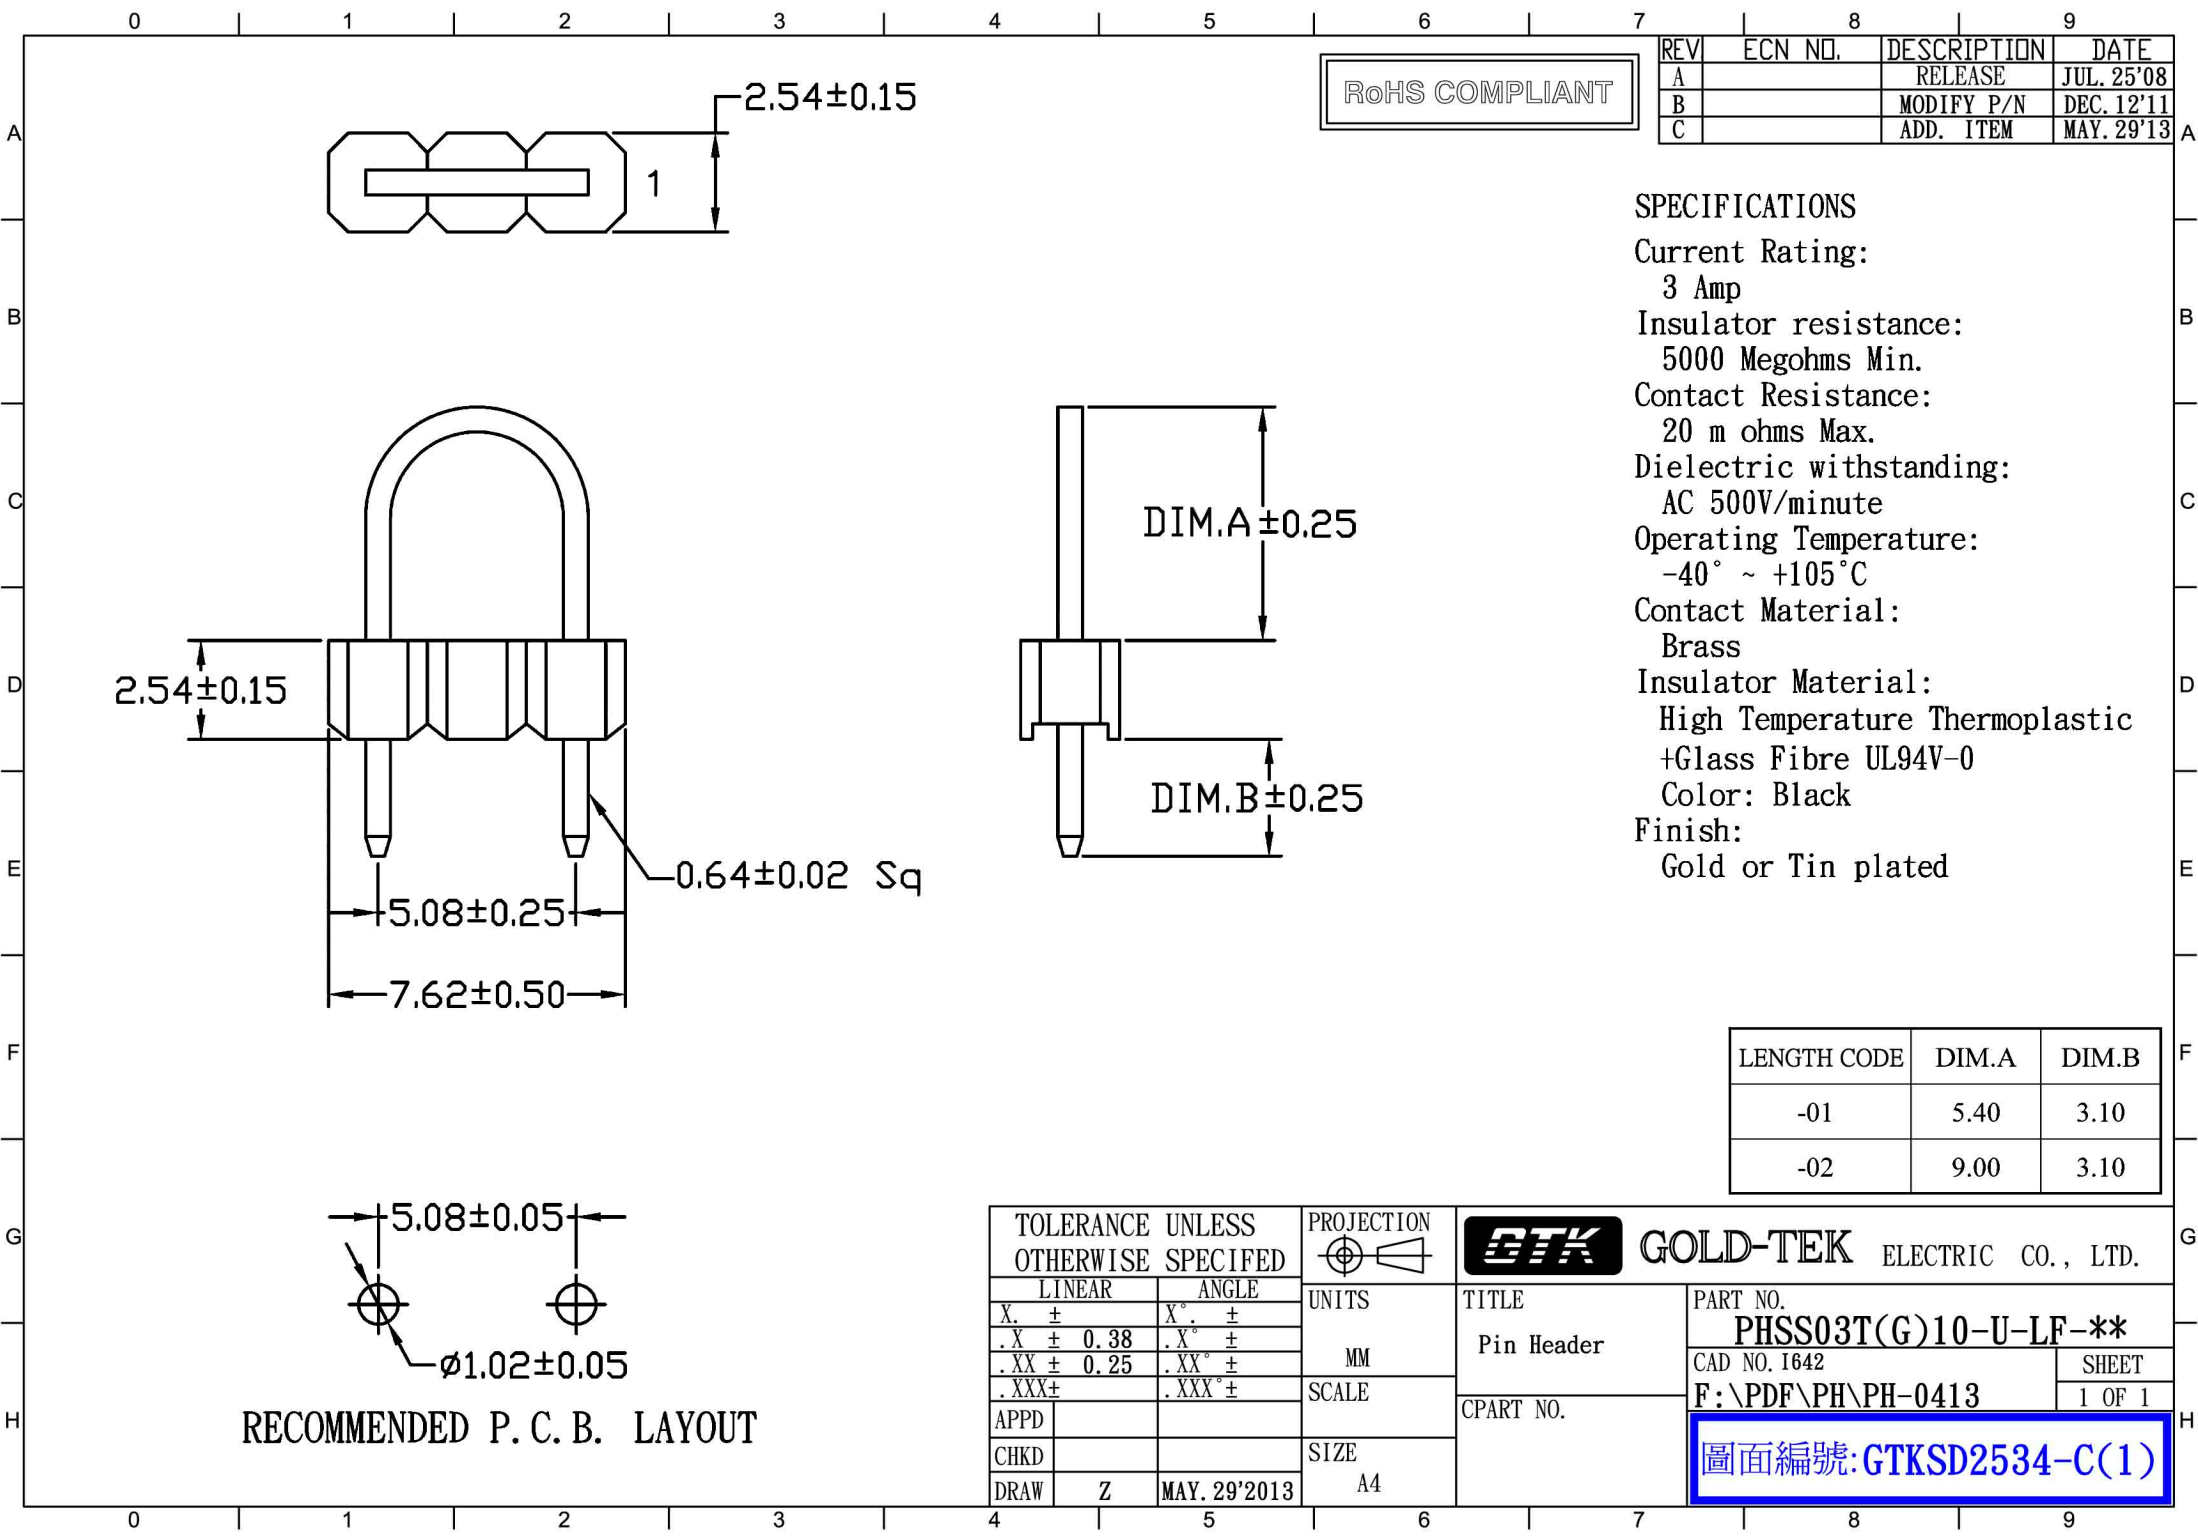

RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	JUL. 25'08
B		MODIFY P/N	DEC. 12'11
C		ADD. ITEM	MAY. 29'13

SPECIFICATIONS

Current Rating:
3 Amp
Insulator resistance:
5000 Megohms Min.
Contact Resistance:
20 m ohms Max.
Dielectric withstanding:
AC 500V/minute
Operating Temperature:
 $-40^{\circ} \sim +105^{\circ}C$
Contact Material:
Brass
Insulator Material:
High Temperature Thermoplastic
+Glass Fibre UL94V-0
Color: Black
Finish:
Gold or Tin plated

LENGTH CODE	DIM.A	DIM.B
-01	5.40	3.10
-02	9.00	3.10

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION	GOLD-TEK ELECTRIC CO., LTD.	
LINEAR	ANGLE	UNITS	TITLE	PART NO.
X. ±	X° ±		Pin Header	PHSS03T(G)10-U-LF-**
.X ± 0.38	.X° ±			CAD NO. I642
.XX ± 0.25	.XX° ±			SHEET
.XXX ±	.XXX° ±	SCALE	CPART NO.	F:\PDF\PH\PH-0413
APPD		SIZE		1 OF 1
CHKD		A4		
DRAW	Z	MAY. 29'2013		

圖面編號:GTKSD2534-C(1)