
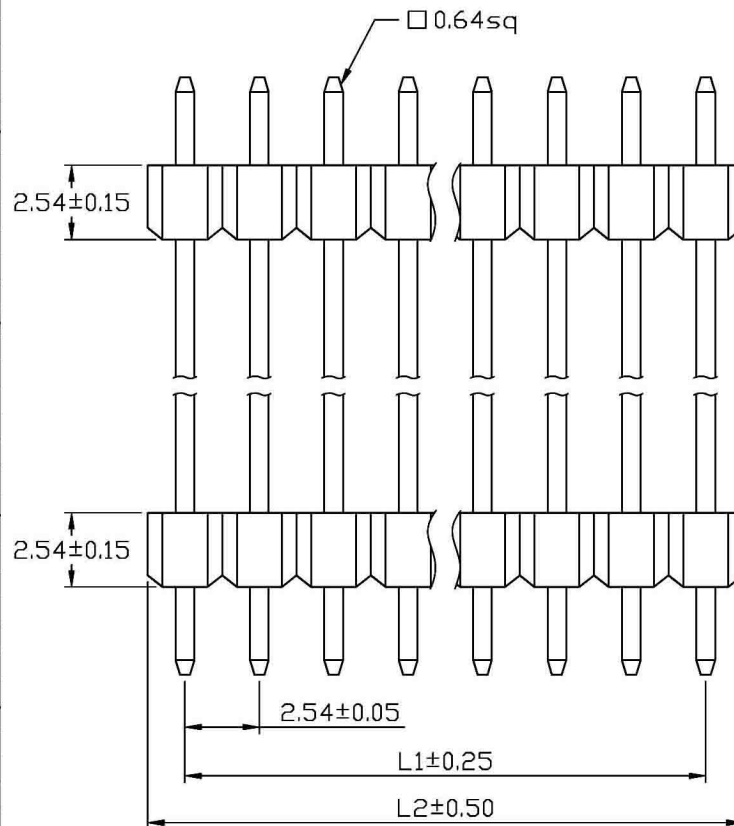


Cir- cuits	Dimension mm	
	L1	L2
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80
21	50.80	53.34
22	53.34	55.88
23	55.88	58.42
24	58.42	60.96
25	60.96	63.50
26	63.50	66.04
27	66.04	68.58
28	68.58	71.12
29	71.12	73.66
30	73.66	76.20
31	76.20	78.74
32	78.74	81.28
33	81.28	83.82
34	83.82	86.36
35	86.36	88.90
36	88.90	91.44
37	91.44	93.98
38	93.98	96.52
39	96.52	99.06
40	99.06	101.60



RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	FEB. 15'16

SPECIFICATIONS

Current Rating: 3 Amp

Voltage Rating: 230V

Insulator resistance: 5000 Megohms Min.

Contact Resistance: 20 m ohms Max.

Dielectric withstanding: AC 1000V/minute



Operating Temperature: -40° ~ +105°C

Contact Material: Brass

Insulator Material: Polyester UL94V-0

Standard Color: Black

Finish: Gold plated

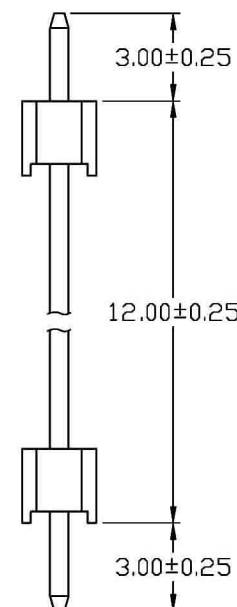

RECOMMENDED P. C. B. LAYOUT

TOLERANCE UNLESS OTHERWISE SPECIFIED			PROJECTION		GOLD-TEK ELECTRIC CO., LTD.	
LINEAR		ANGLE	UNITS		TITLE	
X. ±		X° ±	MM		2.54mm Pin Header Single	
.X ± 0.38		.X° ±	SCALE		Row Straight Dip Board	
.XX ± 0.25		.XX° ±	SIZE		Stacker Type	
.XXX ±		.XXX° ±	A4		CPART NO.	
APPD					PART NO.	
CHKD					PHSS**G10-3030C0	
DRAW	Z	FEB. 15'2016			CAD NO.	
					F:\PDF\PH\PH-0568	
					SHEET	
					1 OF 1	

圖面編號:GTKGS2336-A(1)