


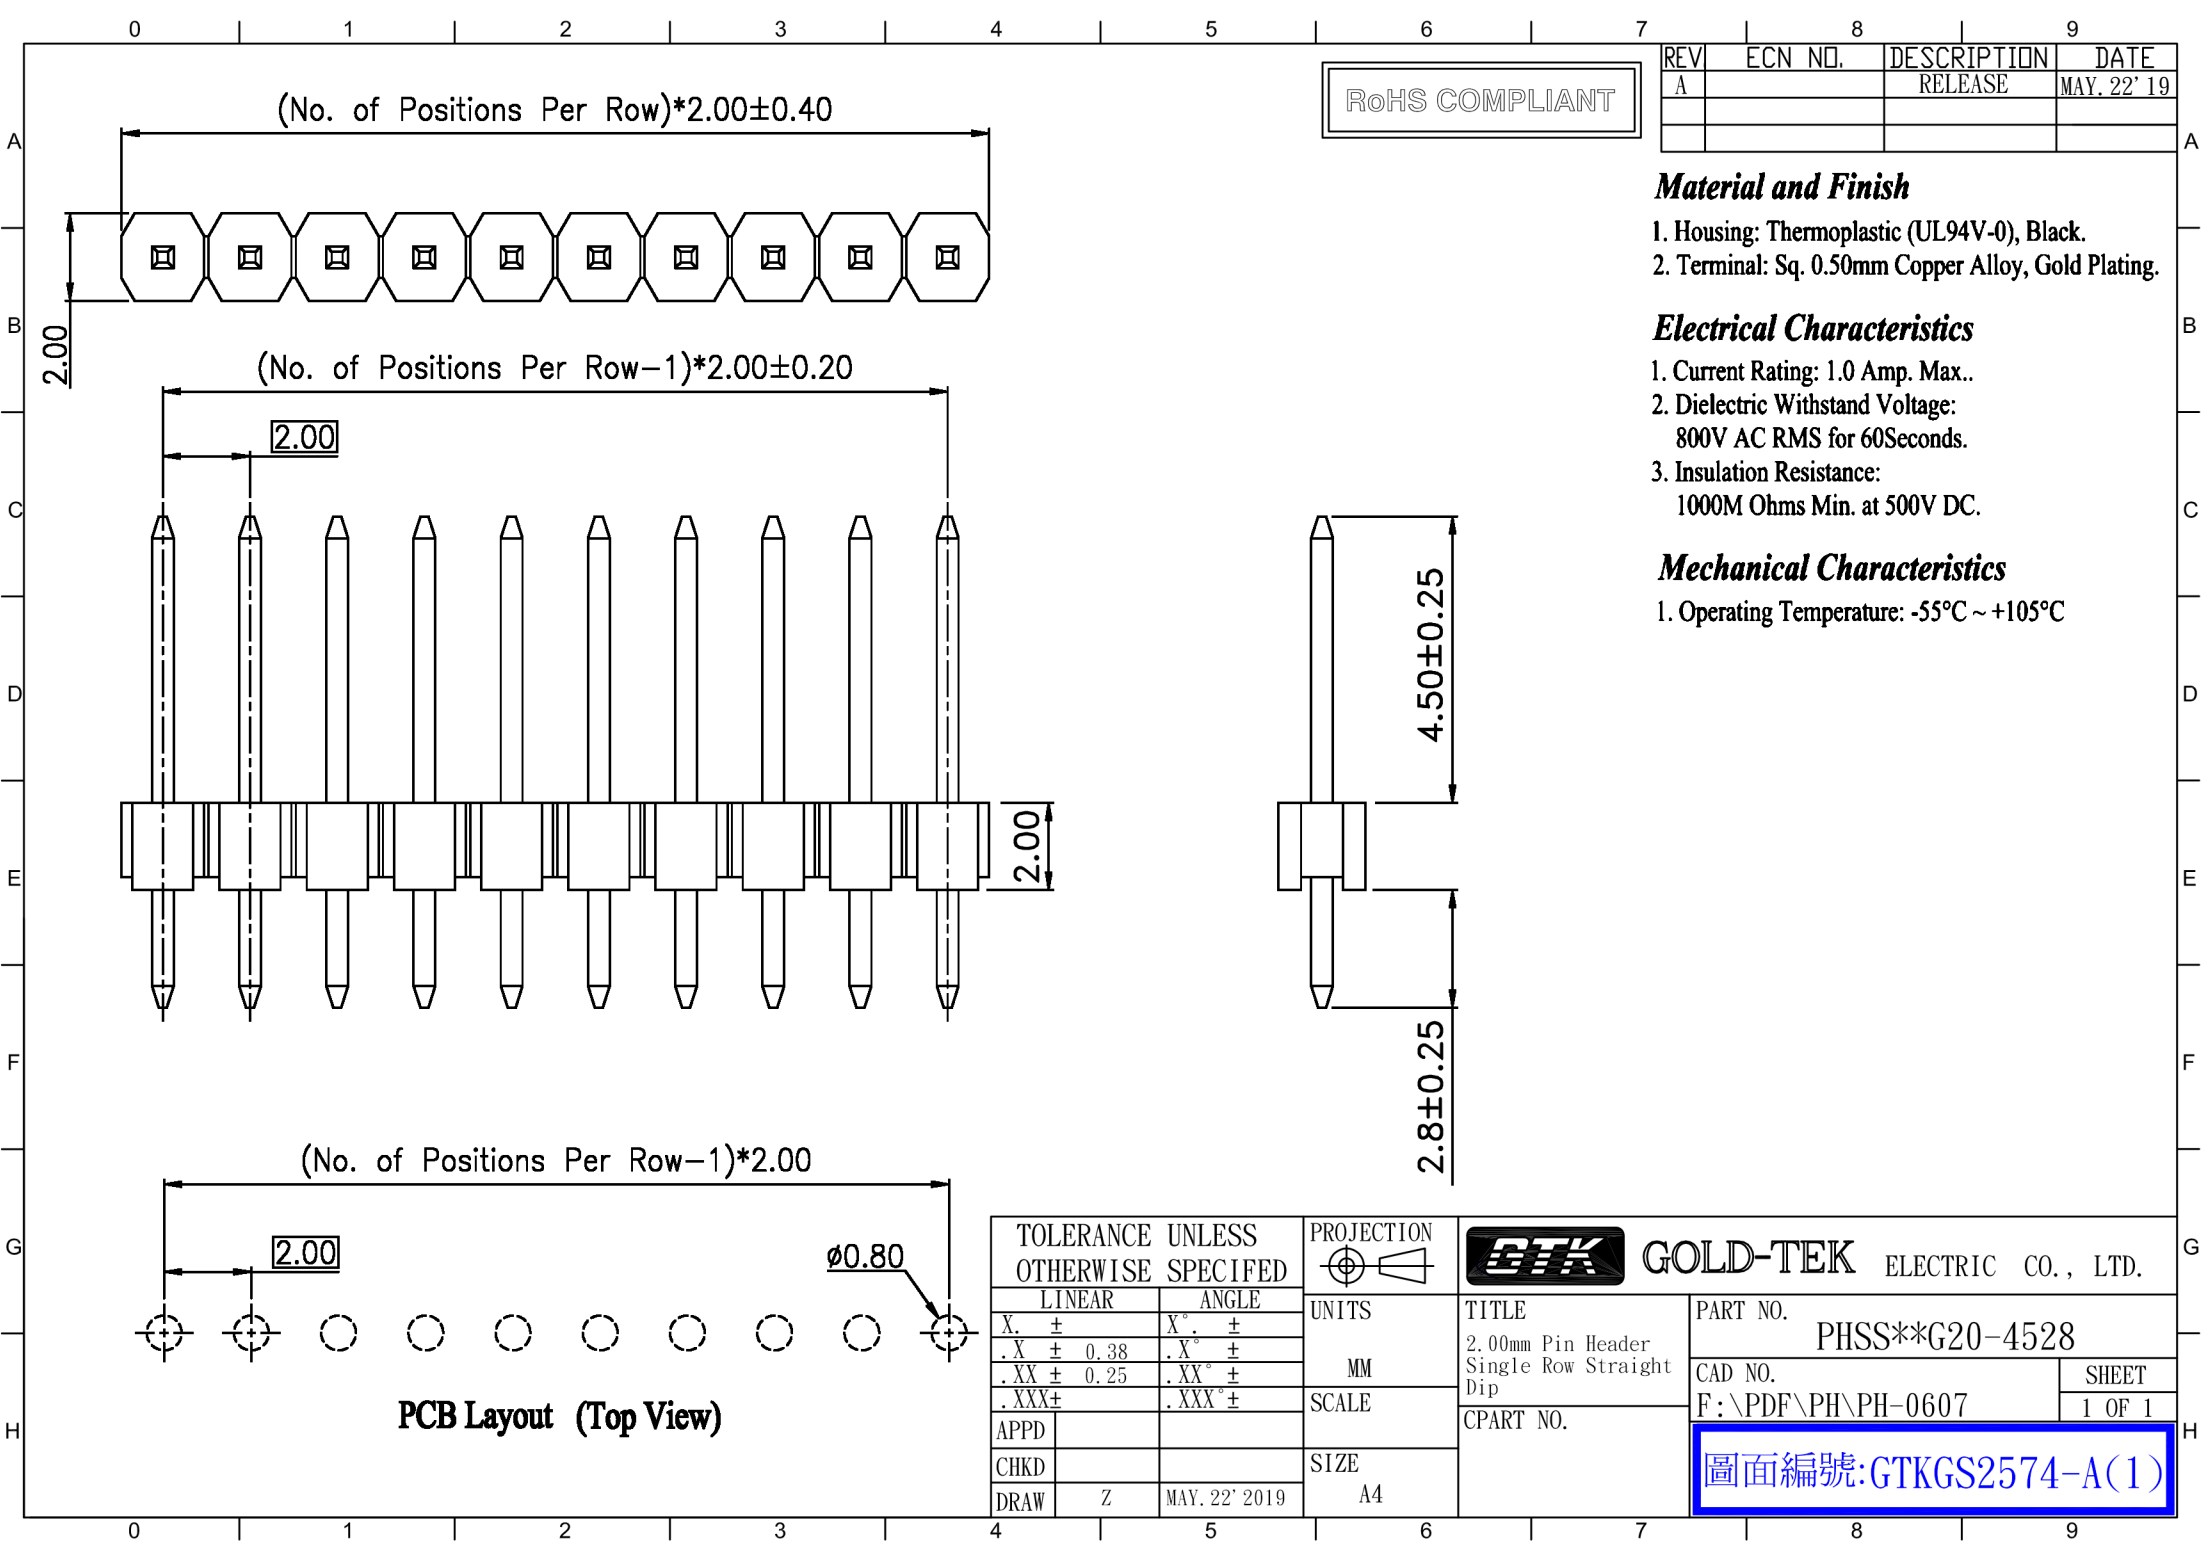

RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	MAY. 22' 19

Material and Finish

1. Housing: Thermoplastic (UL94V-0), Black.

2. Terminal: Sq. 0.50mm Copper Alloy, Gold Plating.

Electrical Characteristics

1. Current Rating: 1.0 Amp. Max..

2. Dielectric Withstand Voltage:
800V AC RMS for 60Seconds.

3. Insulation Resistance:
1000M Ohms Min. at 500V DC.

Mechanical Characteristics

1. Operating Temperature: -55°C ~ +105°C

TOLERANCE UNLESS OTHERWISE SPECIFIED			PROJECTION		GOLD-TEK ELECTRIC CO., LTD.	
LINEAR		ANGLE	UNITS		TITLE	
X.	±	X°	MM		2.00mm Pin Header	
.X	± 0.38	.X°	SCALE		Single Row Straight	
.XX	± 0.25	.XX°	SIZE		Dip	
.XXX	±	.XXX°	A4		CPART NO.	
APPD						
CHKD						
DRAW	Z	MAY. 22' 2019				

PART NO.		SHEET	
PHSS**G20-4528		1 OF 1	
CAD NO.			
F:\PDF\PH\PH-0607			

圖面編號:GTKGS2574-A(1)